



Wideband Operational Amplifier

FEATURES

- Wide Bandwidth: 3 GHz
- High Slew Rate: 830 V/ μ s
- Low Voltage Noise: 2.4 nV/ $\sqrt{\text{Hz}}$
- Single Supply: 5 V, 3 V
- Quiescent Current: 18 mA

APPLICATIONS

- Active Filter
- ADC Driver
- Ultrasound
- Gamma Camera
- RF/Telecom

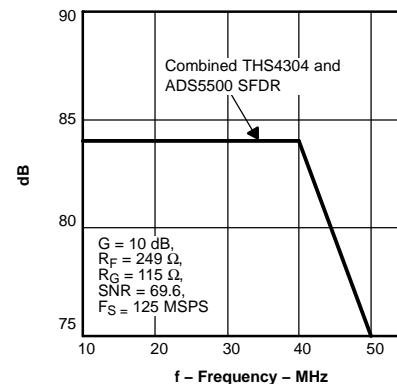
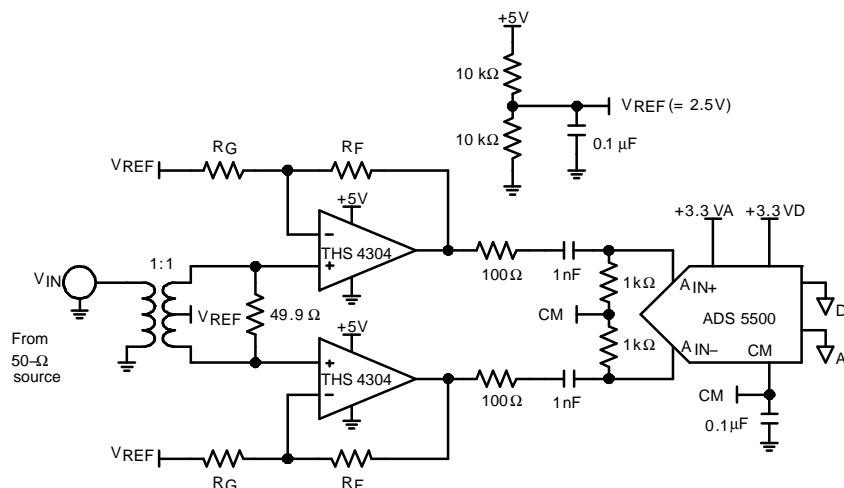
DESCRIPTION

The THS4304 is a wideband, voltage-feedback operational amplifier designed for use in high-speed analog signal-processing chains operating with a single 5-V power supply. Developed in the BiCom3 silicon germanium process technology, the THS4304 offers best-in-class performance using a single 5-V supply as opposed to previous generations of operational amplifiers requiring \pm 5-V supplies.

The THS4304 is a traditional voltage-feedback topology that provides the following benefits: balanced inputs, low offset voltage and offset current, low offset drift, high common mode and power supply rejection ratio.

The THS4304 is offered in 8-pin MSOP package (DGK), the 8-pin SOIC package (D), and the space-saving 5-pin SOT-23 package (DBV).

DIFFERENTIAL ADC DRIVE

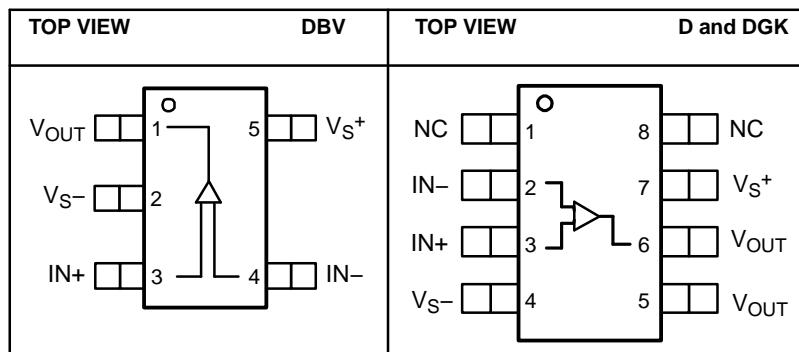


Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

PINOUT DRAWING



NOTE: NC indicates there is no internal connection to these pins.

PACKAGING / ORDERING INFORMATION

PACKAGED DEVICES	PACKAGE TYPE	PACKAGE MARKINGS	TRANSPORT MEDIA, QUANTITY
THS4304DBVT	SOT-23-5	AKW	Tape and Reel, 250
THS4304DBVR			Tape and Reel, 3000
THS4304D	SOIC-8	—	Rails, 75
THS4304DR			Tape and Reel, 2500
THS4304DGK	MSOP-8	AKU	Rails, 100
THS4304DGKR			Tape and Reel, 2500

DISSIPATION RATINGS

PACKAGE	θ_{JC} (°C/W)	θ_{JA} (°C/W) ⁽¹⁾	POWER RATING ⁽²⁾	
			$T_A \leq 25^\circ\text{C}$	$T_A = 85^\circ\text{C}$
DBV (5)	55	255.4	391 mW	156 mW
D (8)	38.3	97.5	1.02 W	410 mW
DGK (8)	71.5	180.8	553 mW	221 mW

(1) This data was taken using the JEDEC standard High-K test PCB.

(2) Power rating determined with a junction temperature of 125°C. This is the point where distortion starts to substantially increase. Thermal management of the final PCB should strive to keep the junction temperature at or below 125°C for best performance and long-term reliability.

ABSOLUTE MAXIMUM RATINGS⁽¹⁾

over operating free-air temperature range (unless otherwise noted)

		UNIT
V_S	Supply voltage	+6.0 V
V_I	Input voltage	$\pm V_S$
I_O	Output current	150 mA
V_{ID}	Differential input voltage	± 2 V
	Continuous power dissipation	See Dissipation Rating Table
T_J	Maximum junction temperature, any condition ⁽²⁾	150°C
	Operating free-air temperature range, continuous operation, long-term reliability ⁽²⁾	125°C
T_{stg}	Storage temperature range	-65°C to 150°C
	Lead temperature: 1.6 mm (1/16 inch) from case for 10 seconds	300°C
ESD Ratings	HBM	1600 V
	CDM	1000 V
	MM	100 V

- (1) The absolute maximum ratings under any condition is limited by the constraints of the silicon process. Stresses above these ratings may cause permanent damage. Exposure to absolute maximum conditions for extended periods may degrade device reliability. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those specified is not implied.
- (2) The maximum junction temperature for continuous operation is limited by package constraints. Operation above this temperature may result in reduced reliability and/or lifetime of the device.

RECOMMENDED OPERATING CONDITIONS

over operating free-air temperature range (unless otherwise noted)

		MIN	MAX	UNIT
Supply voltage, (V_{S+} and V_{S-})	Dual supply	± 1.35	± 2.5	V
	Single supply	2.7	5	
Input common-mode voltage range		$V_{S-} - 0.2$	$V_{S+} + 0.2$	V

ELECTRICAL CHARACTERISTICS

Specifications: $V_S = 5$ V; $R_F = 249 \Omega$, $R_L = 100 \Omega$, and $G = +2$ unless otherwise noted

PARAMETER	CONDITIONS	OVER TEMPERATURE						TEST LEVEL ⁽¹⁾	
		25°C	25°C	0°C to 70°C	–40°C to 85°C	UNITS	MIN/MAX		
AC PERFORMANCE									
Small-Signal Bandwidth	$G = +1$, $V_O = 100$ mVpp	3				GHz	Typ	C	
	$G = +2$, $V_O = 100$ mVpp	1				GHz	Typ	C	
	$G = +5$, $V_O = 100$ mVpp	187				MHz	Typ	C	
	$G = +10$, $V_O = 100$ mVpp	87				MHz	Typ	C	
Gain Bandwidth Product	$G >+10$	870				MHz	Typ	C	
0.1-dB Flat Bandwidth	$G = +2$, $V_O = 100$ mVpp, $C_F = 0.5$ pF	300				MHz	Typ	C	
Large-Signal Bandwidth	$G = +2$, $V_O = 2$ V _{PP}	240				MHz	Typ	C	
Slew Rate	$G = +2$, $V_O = 1$ -V Step	830				V/μs	Typ	C	
	$G = +2$, $V_O = 2$ -V Step	790				V/μs	Typ	C	
Settling Time to 1%	$G = -2$, $V_O = 2$ -V Step	4.5				ns	Typ	C	
Settling Time to 0.1%	$G = -2$, $V_O = 2$ -V Step	7.5				ns	Typ	C	
Settling Time to 0.01%	$G = -2$, $V_O = 2$ -V Step	35				ns	Typ	C	
Rise / Fall Times	$G = +2$, $V_O = 2$ -V Step	2.5				ns	Typ	C	
Harmonic Distortion									
Second Harmonic Distortion	$G = +2$, $V_O = 2$ V _{PP} , $f = 10$ MHz	$R_L = 100 \Omega$	–84				dBc	Typ	C
		$R_L = 1$ kΩ	–95				dBc	Typ	C
Third Harmonic Distortion		$R_L = 100 \Omega$	–100				dBc	Typ	C
		$R_L = 1$ kΩ	–100				dBc	Typ	C
Third-Order Intermodulation Distortion (IMD ₃)	$G = +2$, $V_O = 2$ -V _{PP} envelope, 200-kHz tone spacing, $f = 20$ MHz		–84				dBc	Typ	C
Third-Order Output Intercept (OIP ₃)			48				dBm	Typ	C
Noise Figure	$G = +2$, $f = 1$ GHz	15				dB	Typ	C	
Input Voltage Noise	$f = 1$ MHz	2.4				nV/√Hz	Typ	C	
Input Current Noise	$f = 1$ MHz	2.1				pA/√Hz	Typ	C	
DC PERFORMANCE									
Open-Loop Voltage Gain (A_{OL})	$V_O = \pm 0.8$ V, $V_{CM} = 2.5$ V	65	54	50	50	dB	Min	A	
Input Offset Voltage	$V_{CM} = 2.5$ V	0.5	4	5	5	mV	Max	A	
Input Offset Voltage Drift				5	5	μV/°C	Typ	B	
Input Bias Current		7	12	18	18	μA	Max	A	
Input Bias Current Drift				50	50	nA/°C	Typ	B	
Input Offset Current		0.5	1	1.2	1.2	μA	Max	A	
Input Offset Current Drift				10	10	nA/°C	Typ	B	
INPUT CHARACTERISTICS									
Common-Mode Input Range		–0.2 to 5.2	0.2 to 4.8	0.4 to 4.6	0.4 to 4.6	V	Min	A	
Common-Mode Rejection Ratio	$V_O = \pm 0.2$ V, $V_{CM} = 2.5$ V	95	80	73	73	dB	Min	A	
Input Resistance	Each input, referenced to GND	100				kΩ	Typ	C	
Input Capacitance		1.5				pF	Typ	C	

(1) Test levels: (A) 100% tested at 25°C. Over temperature limits by characterization and simulation. (B) Limits set by characterization and simulation. (C) Typical value only for information.

ELECTRICAL CHARACTERISTICS (continued)

 Specifications: $V_S = 5$ V; $R_F = 249 \Omega$, $R_L = 100 \Omega$, and $G = +2$ unless otherwise noted

PARAMETER	CONDITIONS	TYP	OVER TEMPERATURE				TEST LEVEL ⁽¹⁾	
		25°C	25°C	0°C to 70°C	-40°C to 85°C	UNITS		
OUTPUT CHARACTERISTICS								
Output Voltage Swing	$R_L = 100 \Omega$	1.1 to 3.9	1.2 to 3.8	1.3 to 3.7	1.3 to 3.7	V	Min	
	$R_L = 1 \text{ k}\Omega$	1 to 4	1.1 to 3.9	1.2 to 3.8	1.2 to 3.8			
Output Current (Sourcing)	$R_L = 10 \Omega$	140	100	57	57	mA	Min	A
Output Current (Sinking)	$R_L = 10 \Omega$	92	65	40	40	mA	Min	A
Output Impedance	$f = 100 \text{ kHz}$	0.016				Ω	Typ	A
POWER SUPPLY								
Maximum Operating Voltage		5	5.5	5.5	5.5	V	Max	A
Minimum Operating Voltage		5	2.7	2.7	2.7		Min	
Maximum Quiescent Current		18	18.9	19.4	19.4	mA	Max	A
Minimum Quiescent Current		18	17.5	16.6	16.6	mA	Min	A
Power Supply Rejection (+PSRR)	$V_{S+} = 5.5 \text{ V to } 4.5 \text{ V}$, $V_{S-} = 0 \text{ V}$	80	73	66	66	dB	Min	A
Power Supply Rejection (-PSRR)	$V_{S+} = 5 \text{ V}$, $V_{S-} = -0.5 \text{ V to } +0.5 \text{ V}$	60	57	54	54	dB	Min	A

ELECTRICAL CHARACTERISTICS

Specifications: $V_S = 3$ V; $R_F = 249 \Omega$, $R_L = 499 \Omega$, and $G = +2$ unless otherwise noted

PARAMETER	CONDITIONS	OVER TEMPERATURE				TEST LEVEL ⁽¹⁾	
		25°C	25°C	0°C to 70°C	-40°C to 85°C		
AC PERFORMANCE							
Small-Signal Bandwidth	$G = +1$, $V_O = 100$ mVpp	3				GHz	Typ
	$G = +2$, $V_O = 100$ mVpp	900				MHz	Typ
	$G = +5$, $V_O = 100$ mVpp	190				MHz	Typ
	$G = +10$, $V_O = 100$ mVpp	83				MHz	Typ
Gain Bandwidth Product	$G >+10$	830				MHz	Typ
Large-Signal Bandwidth	$G = +2$, $V_O = 1$ V _{PP}	450				MHz	Typ
Slew Rate	$G = +2$, $V_O = 1$ -V Step	750				V/ μ s	Typ
	$G = +2$, $V_O = 1$ -V Step	675				V/ μ s	Typ
Settling Time to 1%	$G = -2$, $V_O = 0.5$ -V Step	4.5				ns	Typ
Settling Time to 0.1%	$G = -2$, $V_O = 0.5$ -V Step	20				ns	Typ
Rise / Fall Times	$G = +2$, $V_O = 0.5$ -V Step	1.5				ns	Typ
Harmonic Distortion							
Second Harmonic Distortion	$G = +2$, $V_O = 0.5$ V _{PP} , $f = 10$ MHz	$R_L = 499 \Omega$	-92			dBc	Typ
Third Harmonic Distortion			-91			dBc	Typ
Noise Figure	$G = +2$, $f = 1$ GHz		15			dB	Typ
Input Voltage Noise	$f = 1$ MHz		2.4			nV/ $\sqrt{\text{Hz}}$	Typ
Input Current Noise	$f = 1$ MHz		2.1			pA/ $\sqrt{\text{Hz}}$	Typ
DC PERFORMANCE							
Open-Loop Voltage Gain (A_{OL})	$V_O = \pm 0.5$ V, $V_{CM} = 1.5$ V	$V_{CM} = 1.5$ V	49	44			dB
Input Offset Voltage			2	4	5	5	mV
Input Offset Voltage Drift					5	5	$\mu\text{V}/^\circ\text{C}$
Input Bias Current			7	12	18	18	μA
Input Bias Current Drift					50	50	$\text{nA}/^\circ\text{C}$
Input Offset Current			0.4	1	1.2	1.2	μA
Input Offset Current Drift					10	10	$\text{nA}/^\circ\text{C}$
INPUT CHARACTERISTICS							
Common-Mode Input Range			-0.2 to 3.2	0.2 to 2.8	0.4 to 2.6	0.4 to 2.6	V
Common-Mode Rejection Ratio	$V_O = \pm 0.09$ V, $V_{CM} = 1.5$ V		92	80	70	70	dB
Input Resistance	Each input, referenced to GND		100				$\text{k}\Omega$
Input Capacitance			1.5				pF

(1) Test levels: (A) 100% tested at 25°C. Over temperature limits by characterization and simulation. (B) Limits set by characterization and simulation. (C) Typical value only for information.

ELECTRICAL CHARACTERISTICS (continued)

 Specifications: $V_S = 3$ V; $R_F = 249 \Omega$, $R_L = 499 \Omega$, and $G = +2$ unless otherwise noted

PARAMETER	CONDITIONS	OVER TEMPERATURE					TEST LEVEL ⁽¹⁾
		25°C	25°C	0°C to 70°C	-40°C to 85°C	UNITS	
OUTPUT CHARACTERISTIC							
Output Voltage Swing	$R_L = 100 \Omega$	1.1 to 1.9	1.2 to 1.8	1.3 to 1.7	1.3 to 1.7	V	Min
	$R_L = 1 \text{ k}\Omega$	1 to 2	1.1 to 1.9	1.2 to 1.8	1.2 to 1.8		
Output Current (Sourcing)	$R_L = 10 \Omega$	57	50	40	40	mA	Min
Output Current (Sinking)	$R_L = 10 \Omega$	57	45	35	35	mA	Min
Output Impedance	$f = 100 \text{ kHz}$	0.016				Ω	Typ
POWER SUPPLY							
Maximum Operating Voltage		3	5.5	5.5	5.5	V	Max
Minimum Operating Voltage		3	2.7	2.7	2.7		Min
Maximum Quiescent Current		17.2	17.9	18.4	18.4	mA	Max
Minimum Quiescent Current		17.2	16.5	15.6	15.6	mA	Min
Power Supply Rejection (+PSRR)	$V_{S+} = 3.3 \text{ V to } 2.7 \text{ V}$, $V_{S-} = 0 \text{ V}$	80	60	54	54	dB	Min
Power Supply Rejection (-PSRR)	$V_{S+} = 5 \text{ V}$, $V_{S-} = -0.5 \text{ V to } +0.5 \text{ V}$	60	55	52	52	dB	Min

TYPICAL CHARACTERISTICS

Table of Graphs

		FIGURE
5 V		
Frequency response		1–3, 5, 6
0.1-dB Flatness		4
Frequency response by package		7
S-Parameters	vs Frequency	8
2nd Harmonic distortion	vs Frequency	9, 11
3rd Harmonic distortion	vs Frequency	10, 12
2nd Harmonic distortion	vs Output voltage	13
3rd Harmonic distortion	vs Output voltage	14
IMD_3	vs Frequency	15
OIP_3	vs Frequency	16
SR	vs Output voltage	17
V_n/I_n	vs Frequency	18
Noise figure	vs Frequency	19
I_q	vs Supply voltage	20
Rejection ratio	vs Frequency	21
V_o	vs Load resistance	22
V_{os}	vs Input common-mode voltage	23
I_{IB}	vs Case temperature	24
V_{os}	vs Case temperature	25
Open-loop gain	vs Frequency	26
V_o	Small-signal transient response	27
V_o	Large-signal transient response	28
V_o	Settling time	29
V_o	Overdrive recovery time	30
Z_o	Output impedance	31
3 V		
Frequency response		32–35
2nd Harmonic distortion	vs Frequency	36
3rd Harmonic distortion	vs Frequency	37
Harmonic Distortion	vs Output voltage	38
SR	vs Output voltage	39
V_o	Settling time	40
V_o	Output voltage	41
I_{IB}	vs Case temperature	42
V_{os}	vs Case temperature	43
V_o	Large-signal transient response	44
V_o	Overdrive recovery time	45
Z_o	Output impedance	46

TYPICAL CHARACTERISTICS (5 V)

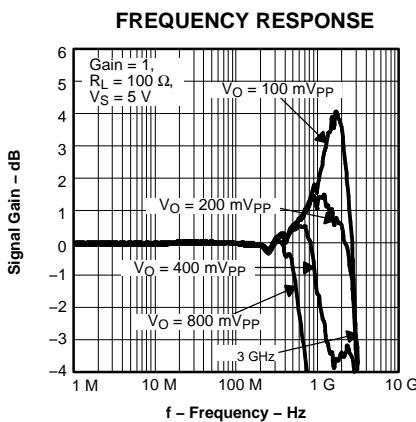


Figure 1.

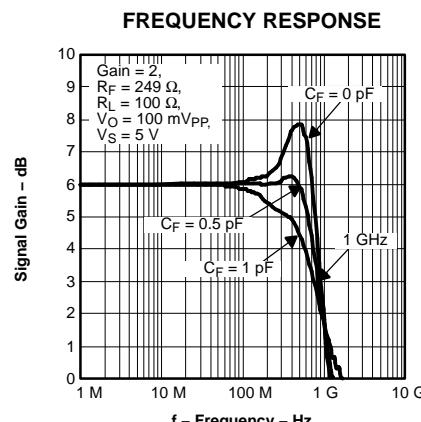


Figure 2.

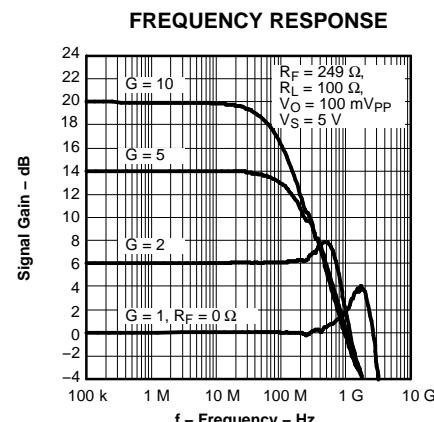


Figure 3.

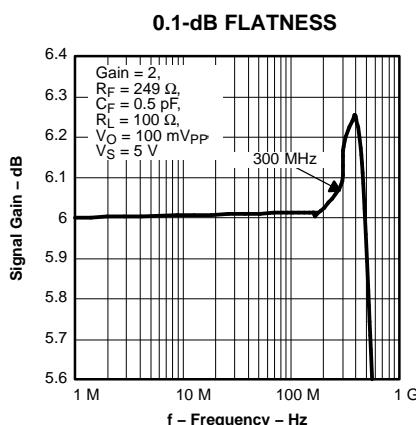


Figure 4.

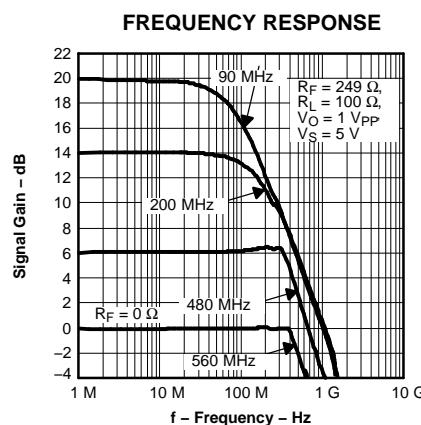


Figure 5.

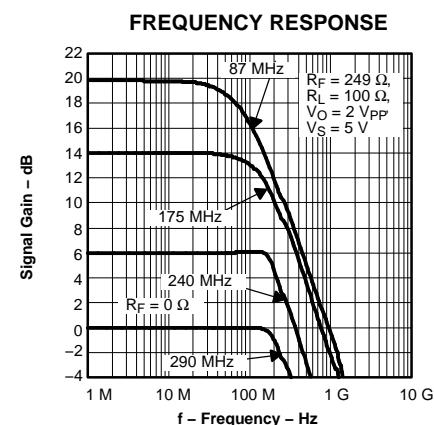


Figure 6.

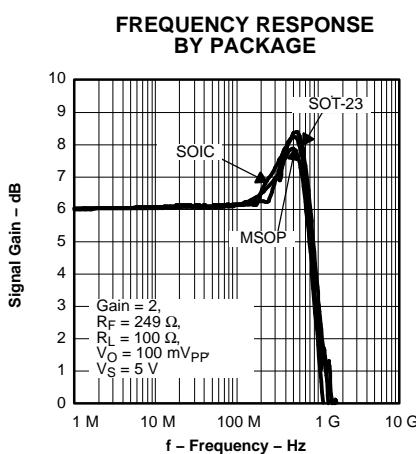


Figure 7.

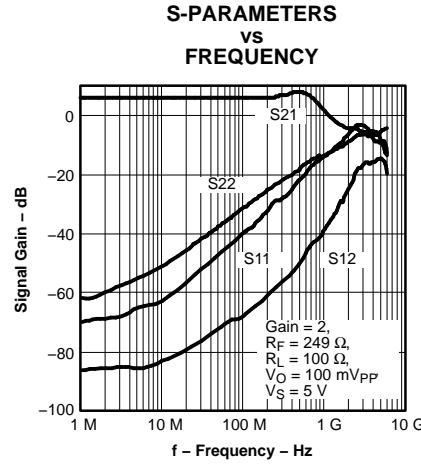


Figure 8.

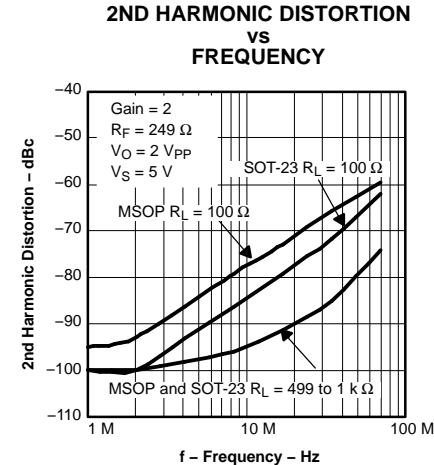


Figure 9.

TYPICAL CHARACTERISTICS (5 V) (continued)

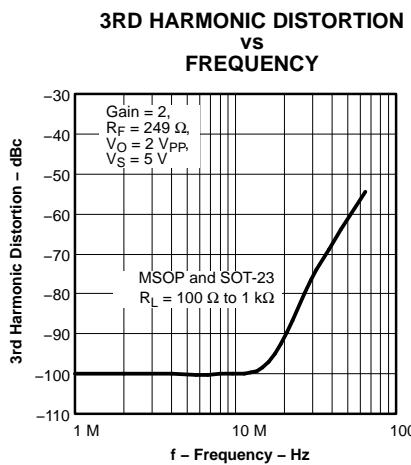


Figure 10.

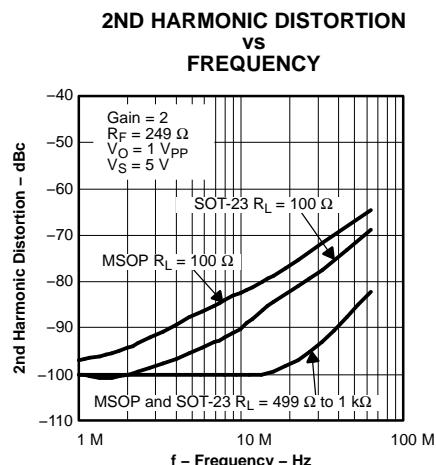


Figure 11.

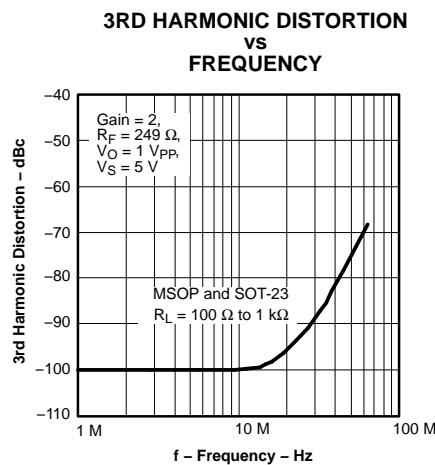


Figure 12.

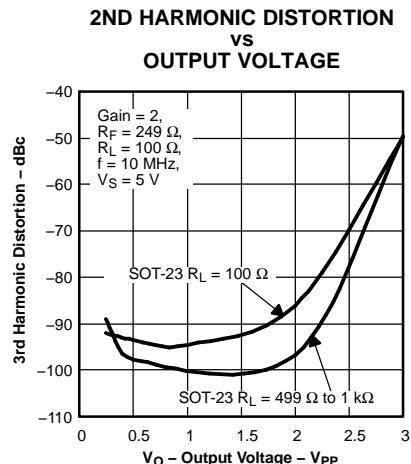


Figure 13.

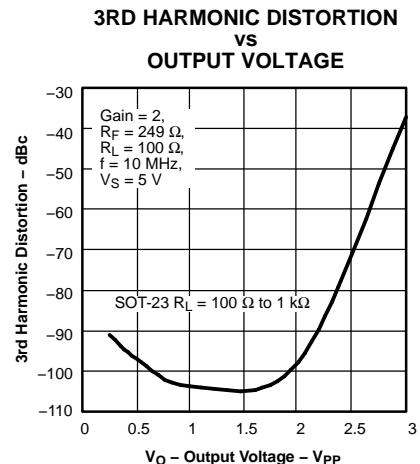


Figure 14.

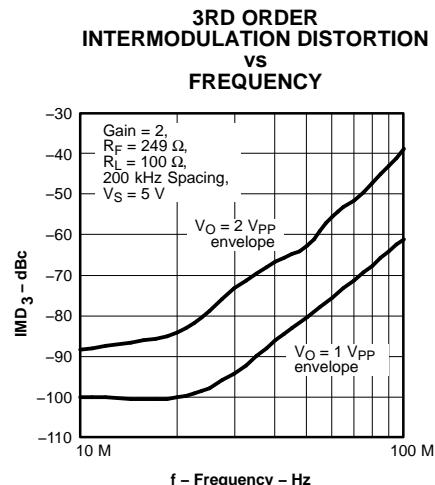


Figure 15.

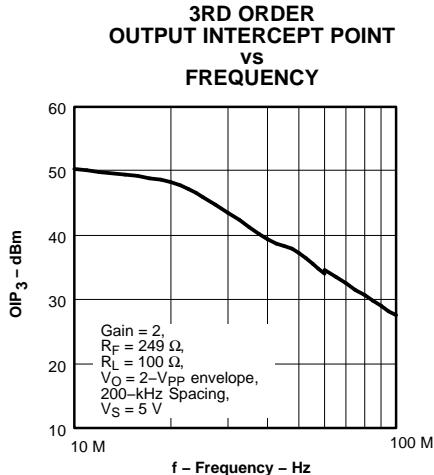


Figure 16.

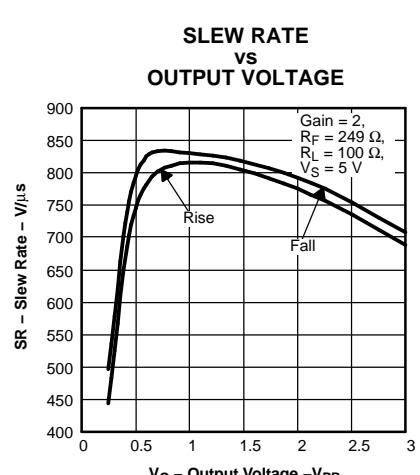


Figure 17.

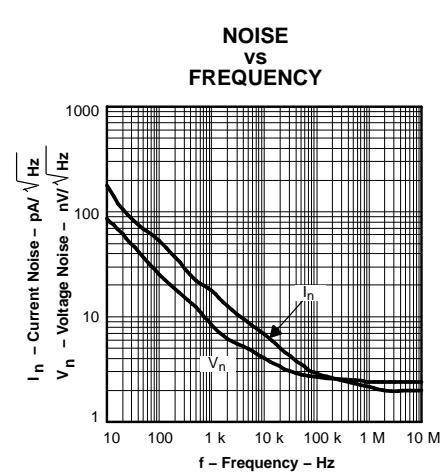


Figure 18.

TYPICAL CHARACTERISTICS (5 V) (continued)

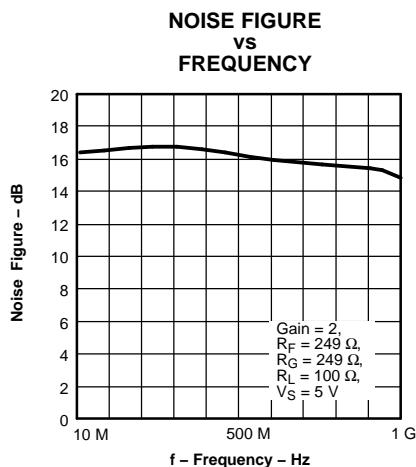


Figure 19.

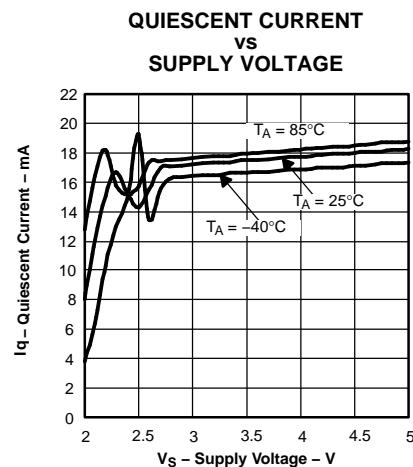


Figure 20.

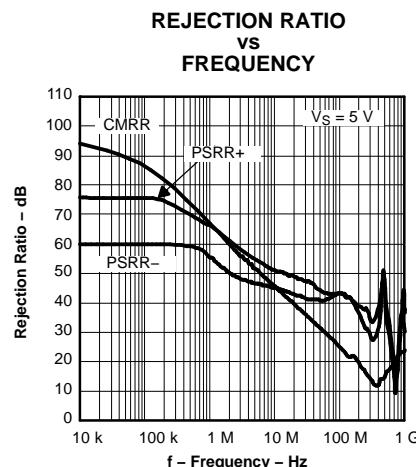


Figure 21.

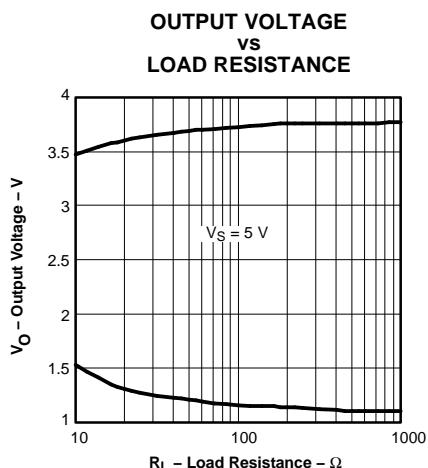


Figure 22.

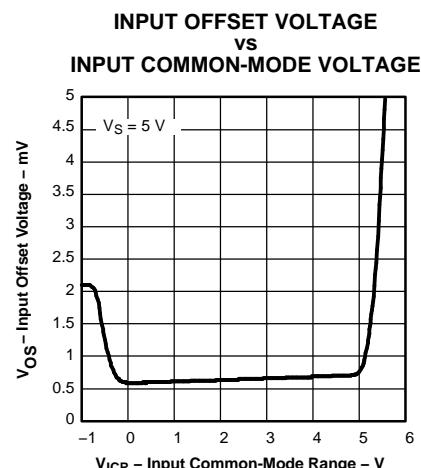


Figure 23.

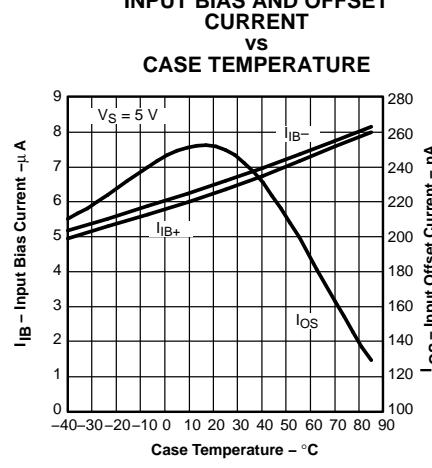


Figure 24.

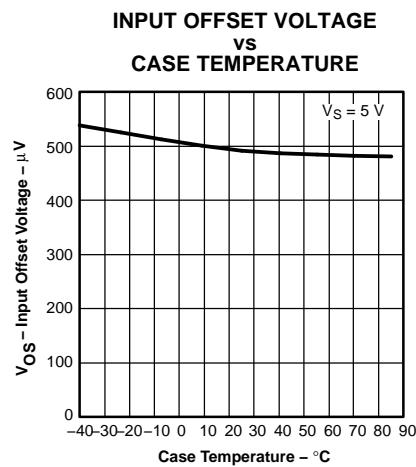


Figure 25.

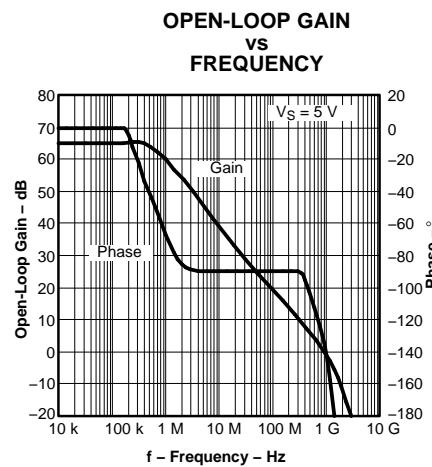


Figure 26.

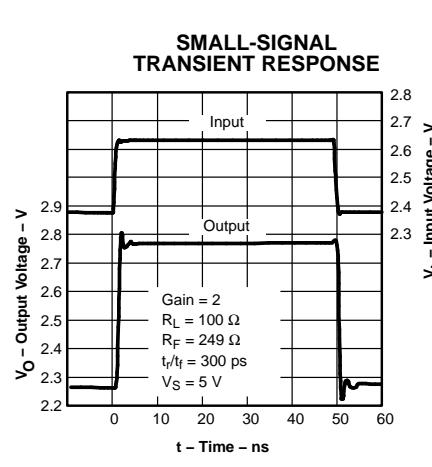


Figure 27.

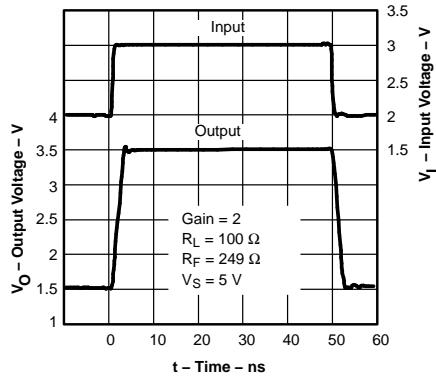
TYPICAL CHARACTERISTICS (5 V) (continued)
**LARGE-SIGNAL
TRANSIENT RESPONSE**


Figure 28.

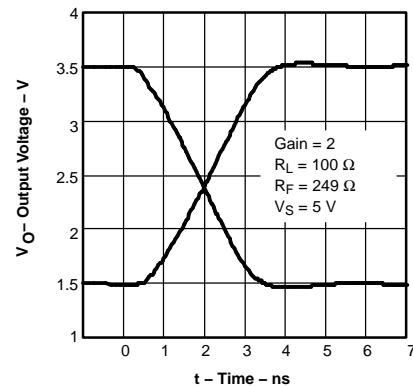
SETTLING TIME


Figure 29.

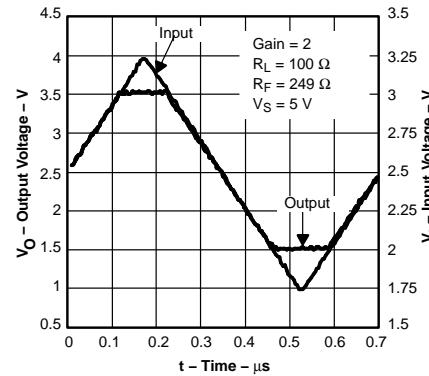
**OVERDRIVE
RECOVERY TIME**


Figure 30.

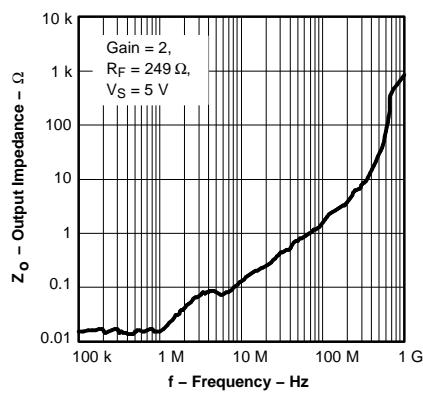
**OUTPUT IMPEDANCE
VS
FREQUENCY**


Figure 31.

TYPICAL CHARACTERISTICS (3 V)

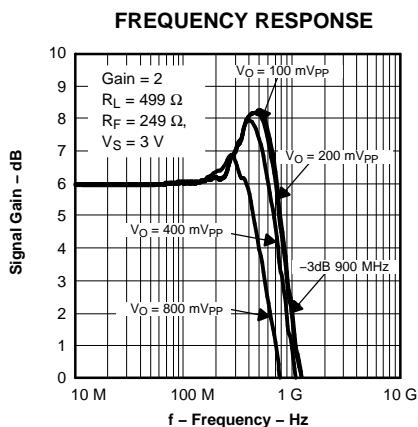


Figure 32.

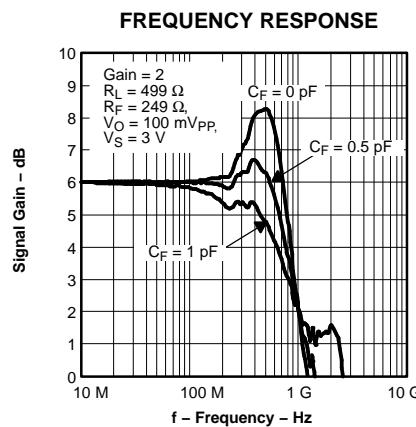


Figure 33.

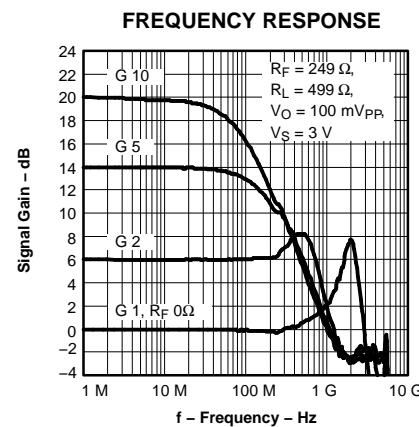


Figure 34.

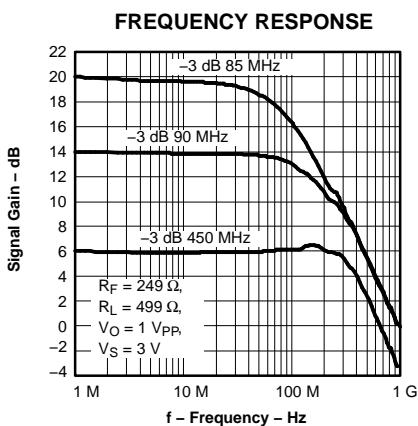


Figure 35.

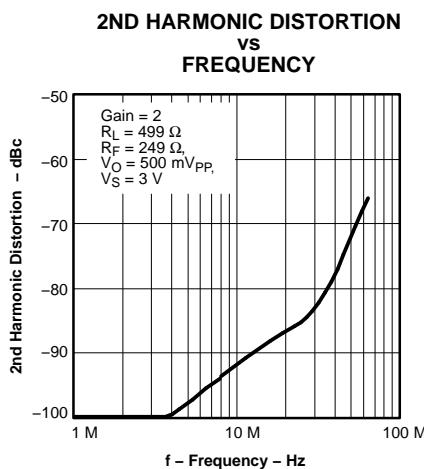


Figure 36.

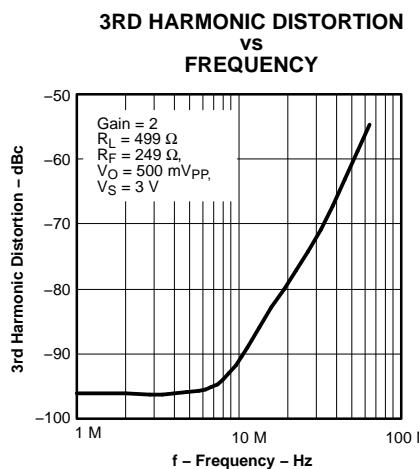


Figure 37.

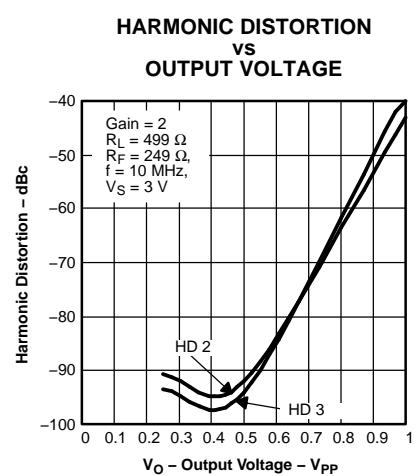


Figure 38.

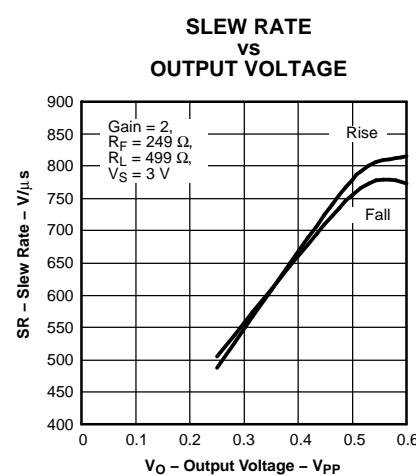


Figure 39.

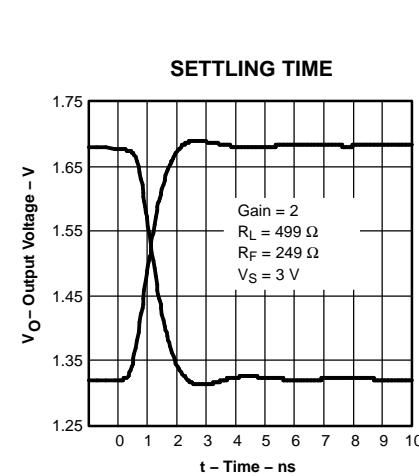


Figure 40.

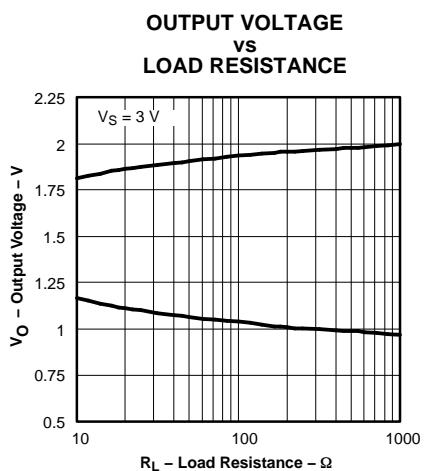
TYPICAL CHARACTERISTICS (3 V) (continued)


Figure 41.

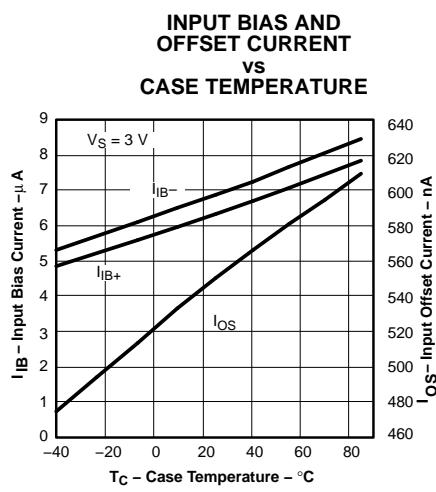


Figure 42.

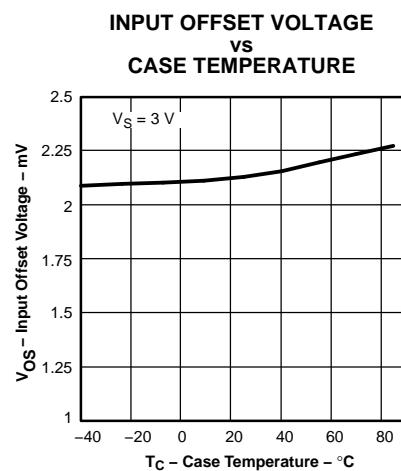


Figure 43.

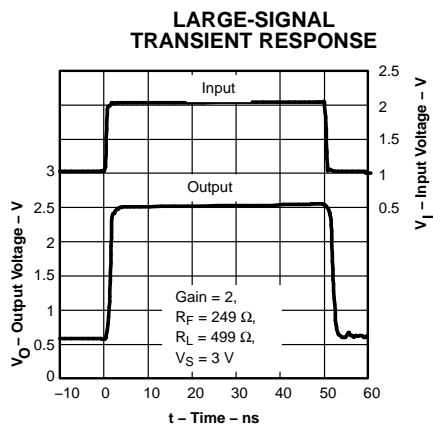


Figure 44.

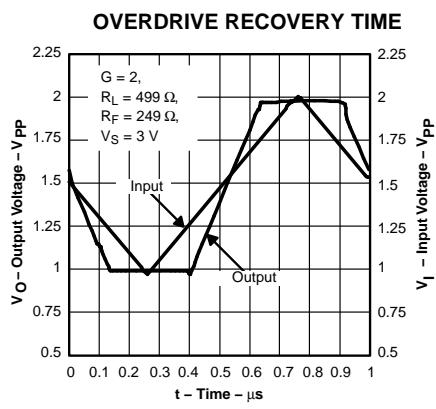


Figure 45.

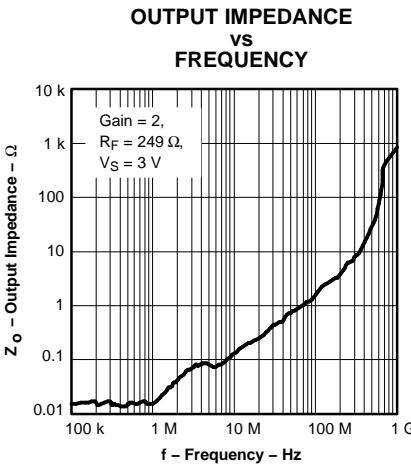


Figure 46.

APPLICATION INFORMATION

For many years, high-performance analog design has required the generation of split power supply voltages, like ± 15 V, ± 8 V, and more recently ± 5 V, in order to realize the full performance of the amplifiers available. Modern trends in high-performance analog are moving towards single-supply operation at 5 V, 3 V, and lower. This reduces power supply cost due to less voltages being generated and conserves energy in low power applications. It can also take a toll on available dynamic range, a valuable commodity in analog design, if the available voltage swing of the signal must also be reduced.

Two key figures of merit for dynamic range are signal-to-noise ratio (SNR) and spurious free dynamic range (SFDR).

SNR is simply the signal level divided by the noise:

$$\text{SNR} = \frac{\text{Signal}}{\text{Noise}}$$

and SFDR is the signal level divided by the highest spur:

$$\text{SFDR} = \frac{\text{Signal}}{\text{Spur}}$$

In an operational amplifier, reduced supply voltage typically results in reduced signal levels due to lower voltage available to operate the transistors within the amplifier. When noise and distortion remain constant, the result is a commensurate reduction in SNR and SFDR. To regain dynamic range, the process and the architecture used to make the operational amplifier must have superior noise and distortion performance with lower power supply overhead required for proper transistor operation.

The THS4304 BiCom3 operational amplifier is just such a device. It is able to provide 2-Vpp signal swing at its output on a single 5-V supply with noise and distortion performance similar to the best 10-V operational amplifiers on the market today.

GENERAL APPLICATION

The THS4304 is a traditional voltage-feedback topology with wideband performance up to 3 GHz at unity gain. Care must be taken to ensure that parasitic elements do not erode the phase margin.

Capacitance at the output and inverting input, and resistance and inductance in the feedback path, can cause problems.

To reduce parasitic capacitance, the ground plane should be removed from under the part.

To reduce inductance in the feedback, the circuit traces should be kept as short and direct as possible. For best performance in non-inverting unity gain ($G=+1V/V$), it is recommended to use a wide trace directly between the output and inverting input.

For a gain of $+2V/V$, it is recommended to use a $249\text{-}\Omega$ feedback resistor. With good layout, this should keep the frequency response peaking to around 2 dB. This resistance is high enough to not load the output excessively, and the part is capable of driving $100\text{-}\Omega$ load with good performance. Higher-value resistors can be used, with more peaking. For example, $499\ \Omega$ gives about 5 dB of peaking, and gives slightly better distortion performance with $100\text{-}\Omega$ load. Lower value feedback resistors can also be used to reduce peaking, but degrades the distortion performance with heavy loads.

Power supply bypass capacitors are required for proper operation. The most critical are $0.1\text{-}\mu\text{F}$ ceramic capacitors; these should be placed as close to the part as possible. Larger bulk capacitors can be shared with other components in the same area as the operational amplifier.

HARMONIC DISTORTION

For best second harmonic (HD2), it is important to use a single-point ground between the power supply bypass capacitors when using a split supply. It is also recommended to use a single ground or reference point for input termination and gain-setting resistors (R8 and R11 in the non-inverting circuit). It is recommended to follow the EVM layout closely in your application.

APPLICATION INFORMATION (continued)

SOT-23 versus MSOP

With light loading of $500\text{-}\Omega$ and higher resistance, the THS4304 shows HD2 that is not dependant of package. With heavy output loading of $100\text{ }\Omega$, the THS4304 in SOT-23 package shows about 6 dB better HD2 performance versus the MSOP package.

EVALUATION MODULES

The THS4304 has two evaluation modules (EVMs) available. One is for the MSOP (DGK) package and the other for the SOT-23 (DBV) package. These provide a convenient platform for evaluating the performance of the part and building various different circuits. The full schematics, board layout, and bill of materials (as supplied) for the boards are shown in the following illustrations.

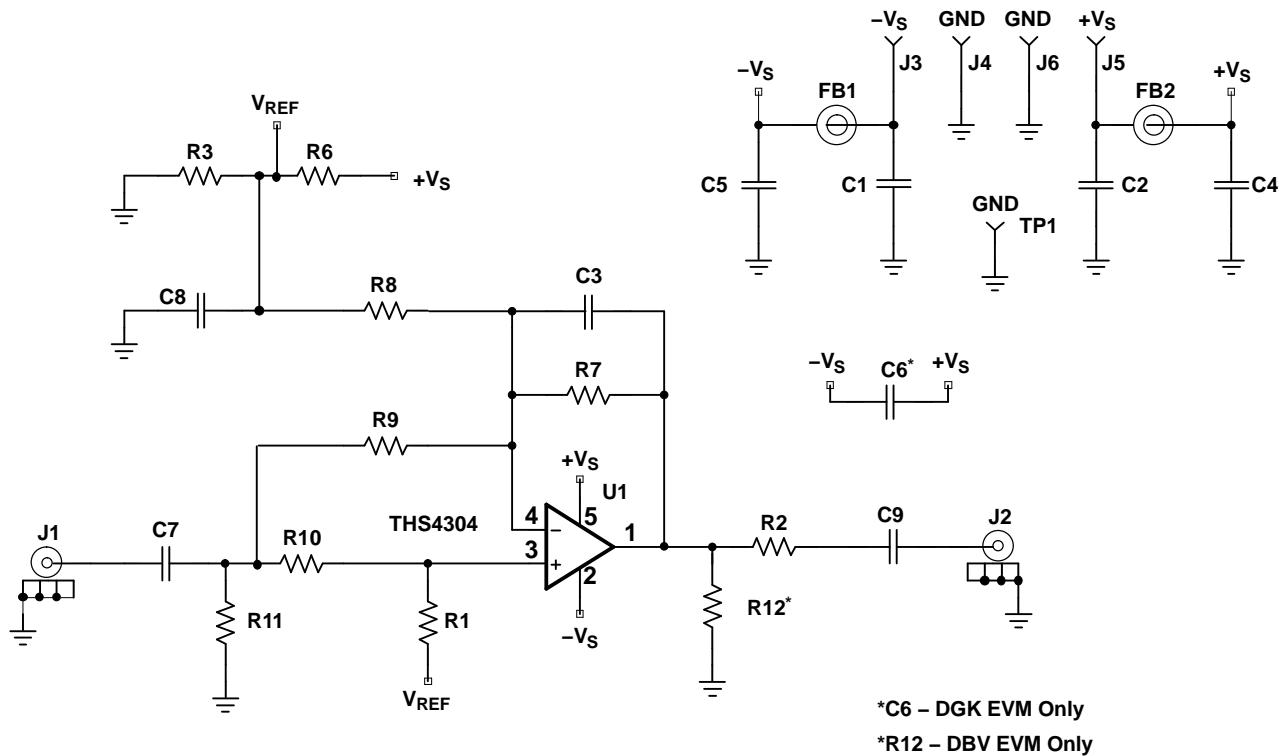


Figure 47. EVM Full Schematic

APPLICATION INFORMATION (continued)
EVM BILL OF MATERIALS

THS4304 EVM ⁽¹⁾						
Item	Description	SMD Size	Reference Designator	PCB Quantity	Manufacturer's Part Number	Distributor's Part Number
1	Bead, ferrite, 3-A, 80- Ω	1206	FB1, FB2	2	(STEWARD) HI1206N800R-00	(DIGI-KEY) 240-1010-1-ND
2	Capacitor, 3.3- μ F, Ceramic	1206	C1, C2	2	(AVX) 1206YG335ZAT2A	(GARRETT) 1206YG335ZAT2A
3	Capacitor, 0.1- μ F, Ceramic	0603	C4, C5	2	(AVX) 0603YC104KAT2A	(GARRETT) 0603YC104KAT2A
4	Open	0603	C3, C6 ⁽²⁾	2		
5	Open	0603	R1, R3, R6, R9, R12 ⁽³⁾	5		
6	Resistor, 0- Ω , 1/10-W, 1%	0603	C7, C8, C9, C10	4	(KOA) RK73Z1JTTD	(GARRETT) RK73Z1JTTD
7	Resistor, 49.9- Ω , 1/10-W, 1%	0603	R2, R11	2	(KOA) RK73H1JLTD49R9F	(GARRETT) RK73H1JLTD49R9F
8	Resistor, 249- Ω , 1/10-W, 1%	0603	R7, R8	2	(KOA) RK73H1JLTD2490F	(GARRETT) RK73H1JLTD2490F
9	Jack, banana receptacle, 0.25-in. diameter hole		J3, J4, J5, J6	4	(HH SMITH) 101	(NEWARK) 35F865
10	Test point, black		TP1	1	(KEYSTONE) 5001	(DIGI-KEY) 5001K-ND
11	Connector, edge, SMA PCB jack		J1, J2	2	(JOHNSON) 142-0701-801	(NEWARK) 90F2624
12	Integrated Circuit, THS4304		U1	1	(TI) THS4304DGK, or (TI) THS4304DBV	
13	Standoff, 4-40 HEX, 0.625-in. Length			4	(KEYSTONE) 1808	NEWARK) 89F1934
14	Screw, Phillips, 4-40, 0.250-in.			4	SHR-0440-016-SN	
15	Board, printed-circuit			1	(TI) THS4304DGK ENG A, or (TI) THS4304DBV ENG A	

(1) NOTE: All items are designated for both the DBV and DGK EVMs unless otherwise noted.

(2) C6 used on DGK EVM only.

(3) R12 used on DBV EVM only.

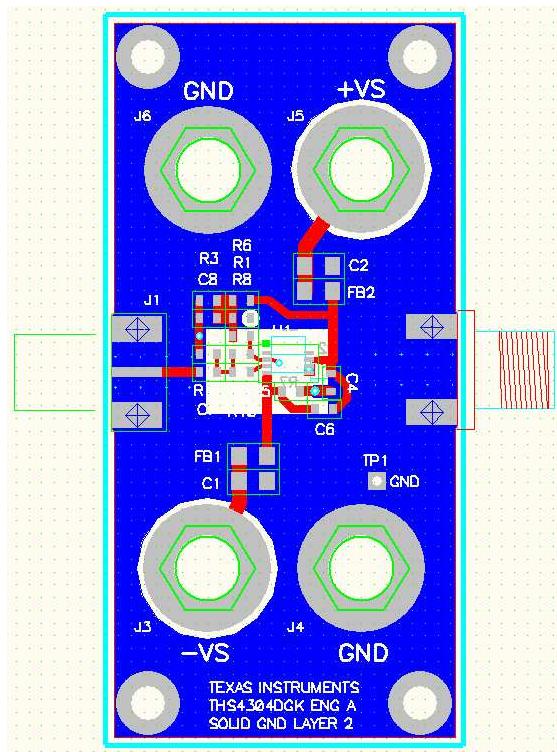


Figure 48. THS4304DGK EVM Layout Top and L2

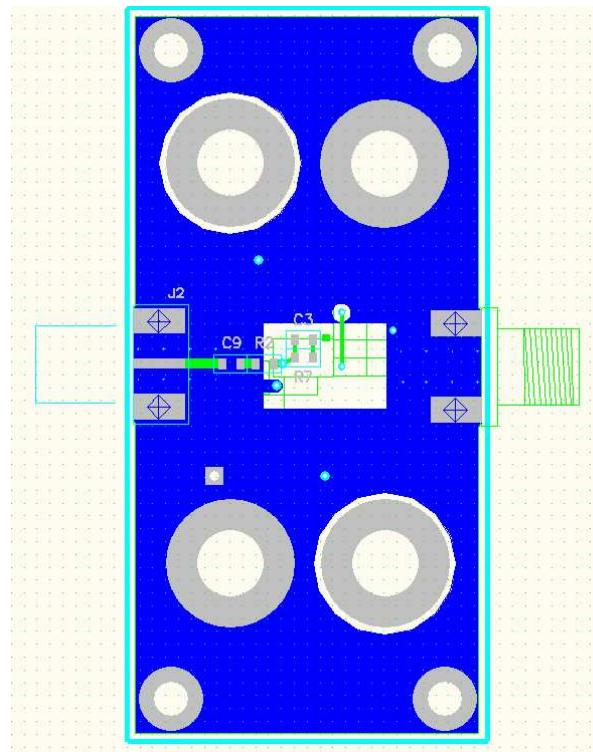


Figure 49. THS4304DGK EVM Layout Bottom and L3

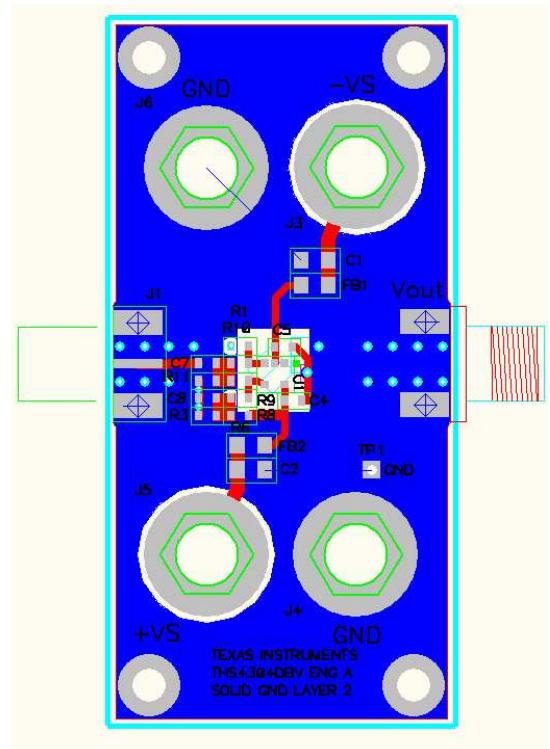


Figure 50. THS4304DBV EVM Layout Top and L2

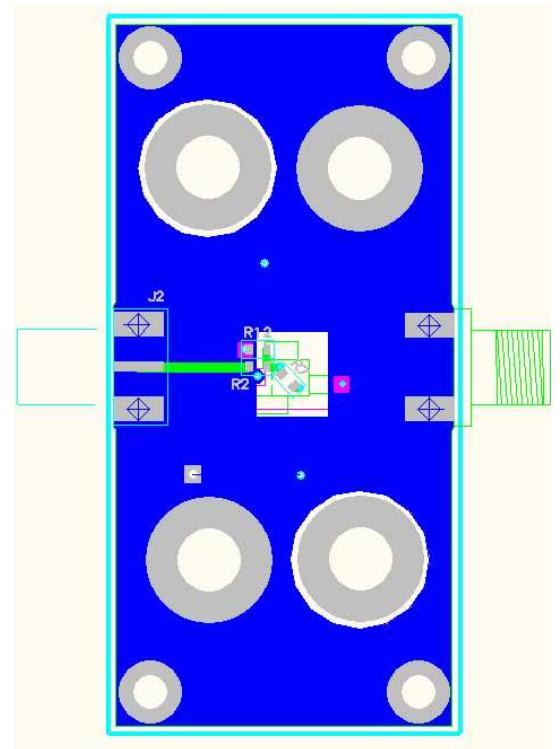


Figure 51. THS4304DBV EVM Layout Bottom and L3

NON-INVERTING GAIN WITH SPLIT SUPPLY

The following schematic shows how to configure the operational amplifier for non-inverting gain with split power supply ($\pm 2.5V$). This is how the EVM is supplied from TI. This configuration is convenient for test purposes because most signal generators and analyzer are designed to use ground-referenced signals by default. Note the input and output provides $50\text{-}\Omega$ termination.

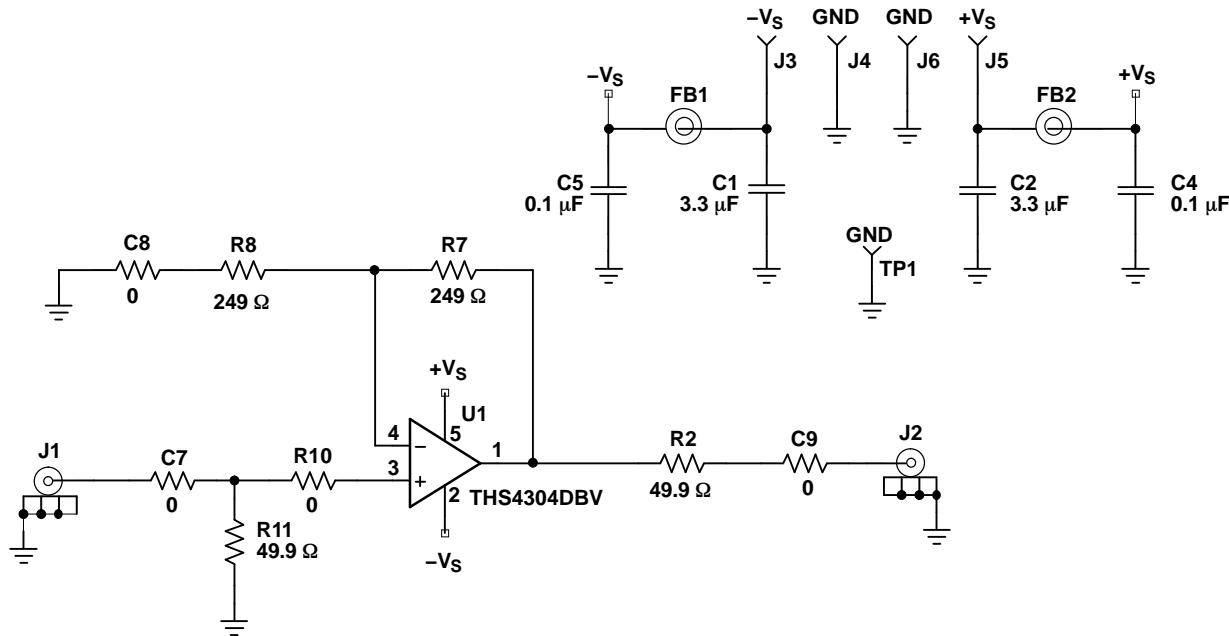


Figure 52. Non-Inverting Gain with Split Power Supply

INVERTING GAIN WITH SPLIT POWER SUPPLY

The following schematic shows how to configure the operational amplifier for inverting gain of 1 (-1 V/V) with split power supply ($\pm 2.5 \text{ V}$). Note the input and output provides $50\text{-}\Omega$ termination for convenient interface to common test equipment.

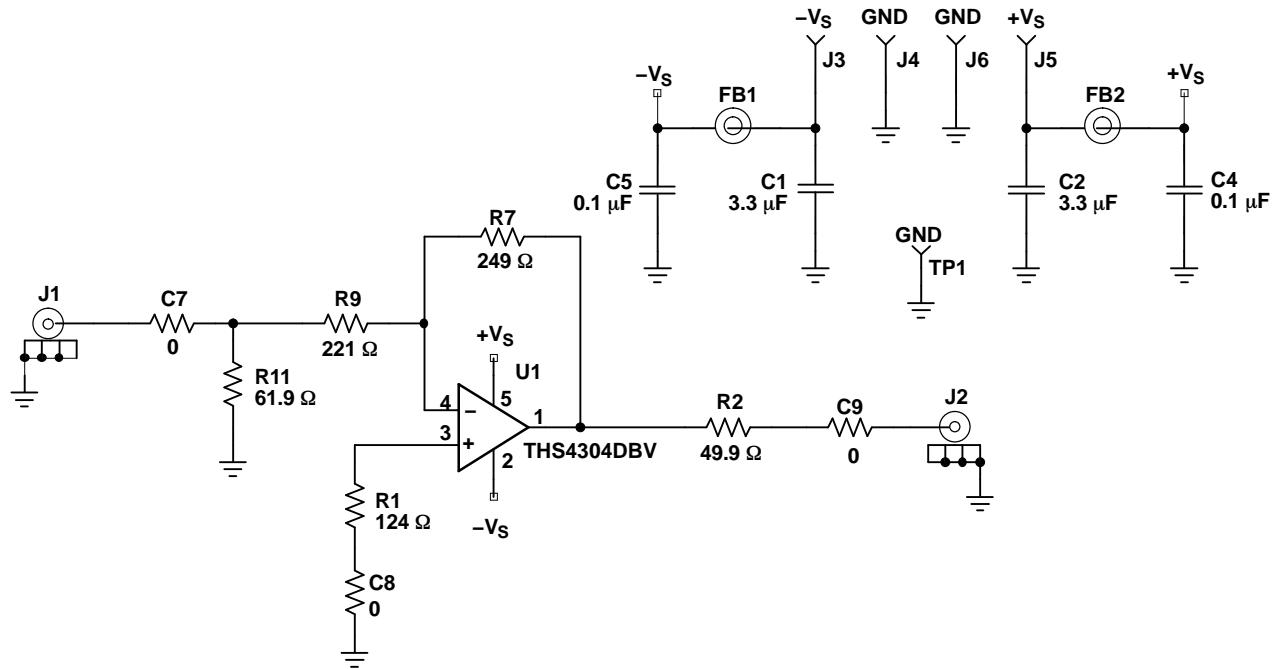


Figure 53. Inverting Gain with Split Power Supply

NON-INVERTING SINGLE-SUPPLY OPERATION

The THS4304 EVM can easily be configured for single 5-V supply operation, as shown in the following schematic, with no change in performance. This circuit passes dc signals at the input, so care must be taken to reference (or bias) the input signal to mid-supply.

If dc operation is not required, the amplifier can be ac coupled by inserting a capacitor in series with the input (C7) and output (C9).

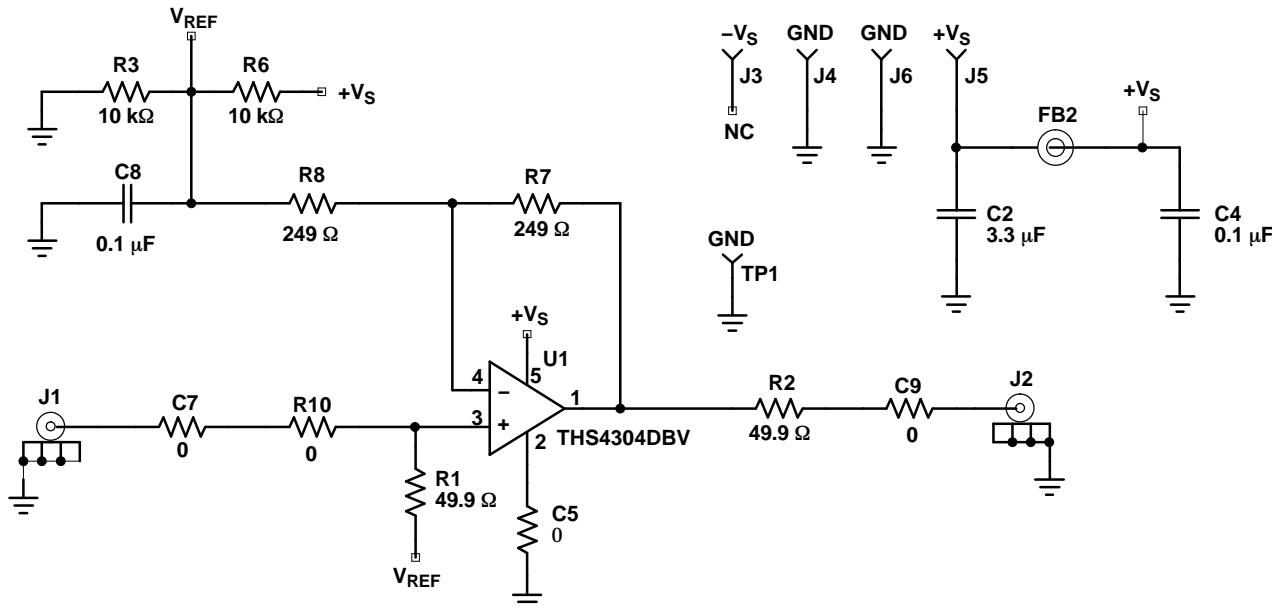


Figure 54. Non-Inverting 5-V Single-Supply Amplifier

DIFFERENTIAL ADC DRIVE AMPLIFIER

The circuit shown in Figure 54 is adapted as shown in Figure 55 to provide a high-performance differential amplifier drive circuit for use with high-performance ADCs, like the ADS5500 (14-bit 125-MSP ADC). For testing purposes, the circuit uses a transformer to convert the signal from a single-ended source to differential. If the input signal source in your application is differential and biased to mid-rail, no transformer is required.

The circuit employs two amplifiers to provide a differential signal path to the ADS5500. A resistor divider (two 10-k Ω resistors) is used to obtain a mid-supply reference voltage of 2.5 V (VREF) (the same as shown in the single-supply circuit of Figure 54). Applying this voltage to the one side of RG and to the positive input of the operational amplifier (via the center-tap of the transformer) sets the input and output common-mode voltage of the operational amplifiers to mid-rail to optimize their performance. The ADS5500 requires an input common-mode voltage of 1.5 V. Due to the mismatch in required common-mode voltage, the signal is ac coupled from the amplifier output, via the two 1-nF capacitors, to the input of the ADC. The CM voltage of the ADS5500 is used to bias the ADC input to the required voltage, via the 1-k Ω resistors. Note: 100- μ A common-mode current is drawn by the ADS5500 input stage (at 125 MSPS). This causes a 100-mV shift in the input common-mode voltage, which does not impact the performance when driving the input to -1 dB of full scale. To offset this effect, a voltage divider from the power supply can be used to derive the input common-mode voltage reference.

Because the operational amplifiers are configured as non-inverting, the inputs are high impedance. This is particularly useful when interfacing to a high-impedance source. In this situation, the amplifiers provide impedance matching and amplification of the signal.

The SFDR performance of the circuit is shown in the following graph (see Figure 56) and provides for full performance from the ADS5500 to 40 MHz.

The differential topology employed in this circuit provides for significant suppression of the 2nd-order harmonic distortion of the amplifiers. This, along with the superior 3rd-order harmonic distortion performance of the amplifiers, results in the SFDR performance of the circuit (at frequencies up to 40 MHz) being set by higher-order harmonics generated by the sampling process of the ADS5500.

The amplifier circuit (with resistor divider for bias voltage generation) requires a total of 185 mW of power from a single 5-V power supply.

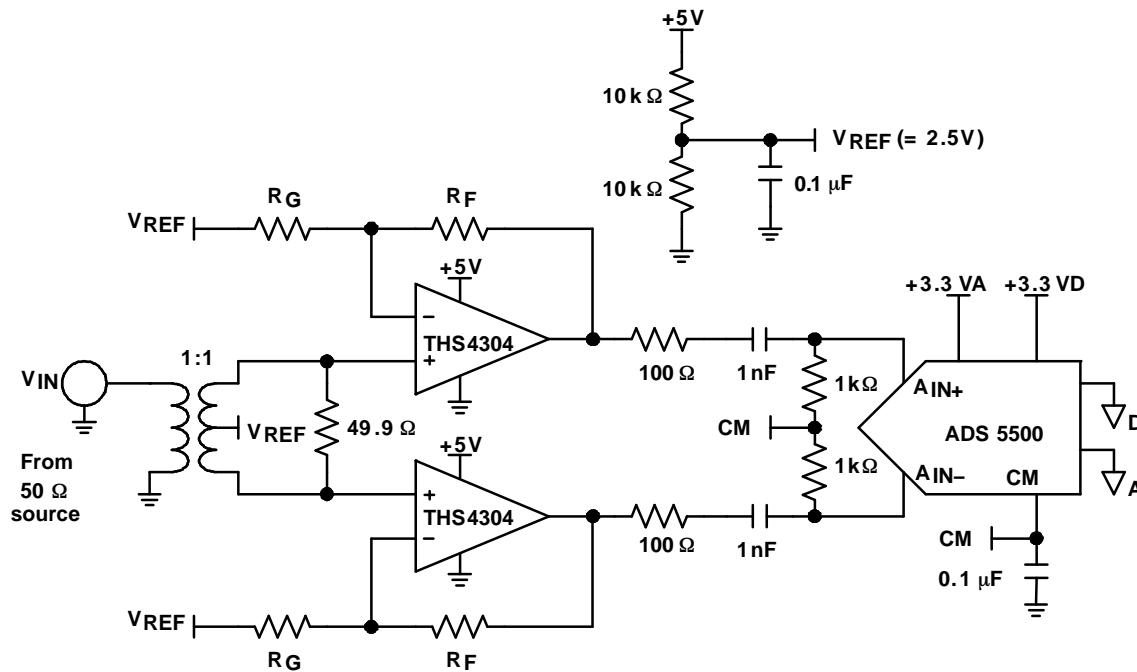


Figure 55. Differential ADC Drive Amplifier Circuit

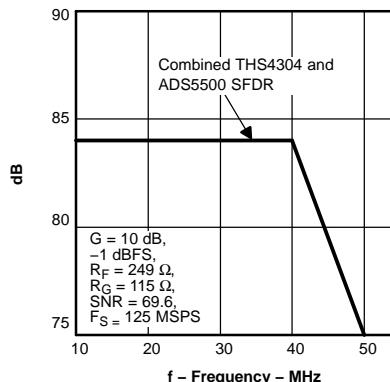


Figure 56. SFDR Performance versus Frequency – THS4304 Driving ADS5500

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish (6)	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
THS4304D	ACTIVE	SOIC	D	8	75	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	4304	Samples
THS4304DBVR	ACTIVE	SOT-23	DBV	5	3000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	AKW	Samples
THS4304DBVT	ACTIVE	SOT-23	DBV	5	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	AKW	Samples
THS4304DBVTG4	ACTIVE	SOT-23	DBV	5	250	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	AKW	Samples
THS4304DG4	ACTIVE	SOIC	D	8	75	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	4304	Samples
THS4304DGK	ACTIVE	VSSOP	DGK	8	80	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM	-40 to 85	AKU	Samples
THS4304DR	OBsolete	SOIC	D	8		TBD	Call TI	Call TI	-40 to 85		
THS4304DRG4	OBsolete	SOIC	D	8		TBD	Call TI	Call TI	-40 to 85		

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBsolete: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. - The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "~" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

(6) Lead/Ball Finish - Orderable Devices may have multiple material finish options. Finish options are separated by a vertical ruled line. Lead/Ball Finish values may wrap to two lines if the finish value exceeds the maximum column width.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

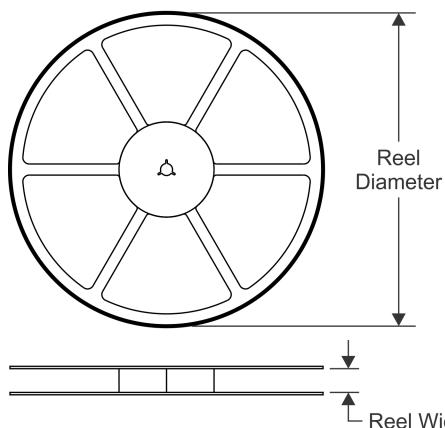
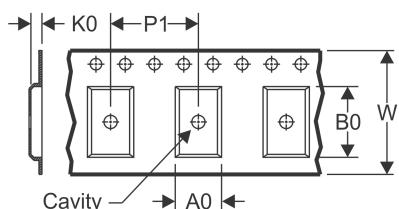
In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

OTHER QUALIFIED VERSIONS OF THS4304 :

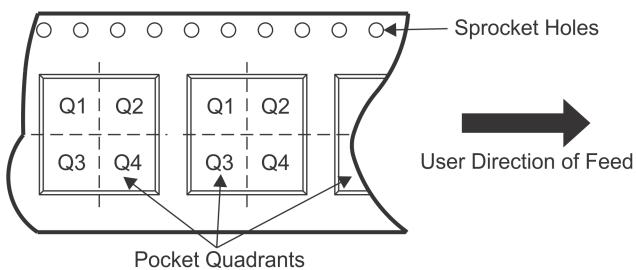
- Space: [THS4304-SP](#)

NOTE: Qualified Version Definitions:

- Space - Radiation tolerant, ceramic packaging and qualified for use in Space-based application

TAPE AND REEL INFORMATION
REEL DIMENSIONS

TAPE DIMENSIONS


A0	Dimension designed to accommodate the component width
B0	Dimension designed to accommodate the component length
K0	Dimension designed to accommodate the component thickness
W	Overall width of the carrier tape
P1	Pitch between successive cavity centers

QUADRANT ASSIGNMENTS FOR PIN 1 ORIENTATION IN TAPE


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
THS4304DBVR	SOT-23	DBV	5	3000	180.0	9.0	3.15	3.2	1.4	4.0	8.0	Q3
THS4304DBVT	SOT-23	DBV	5	250	180.0	9.0	3.15	3.2	1.4	4.0	8.0	Q3

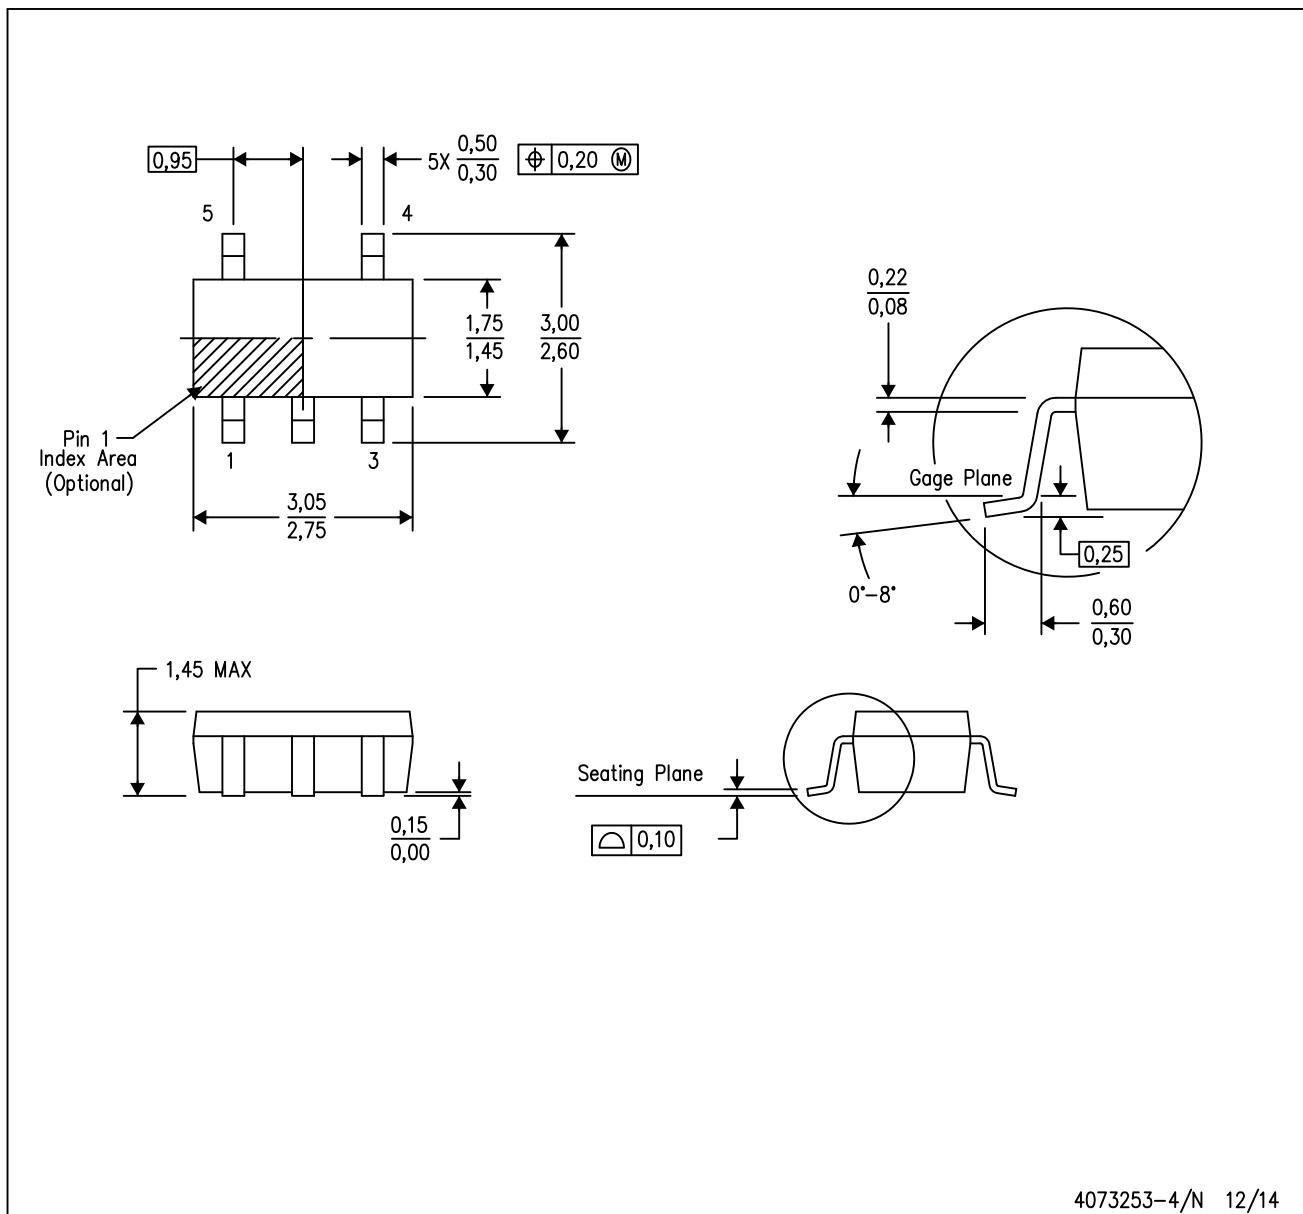
TAPE AND REEL BOX DIMENSIONS

*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
THS4304DBVR	SOT-23	DBV	5	3000	182.0	182.0	20.0
THS4304DBVT	SOT-23	DBV	5	250	182.0	182.0	20.0

DBV (R-PDSO-G5)

PLASTIC SMALL-OUTLINE PACKAGE



4073253-4/N 12/14

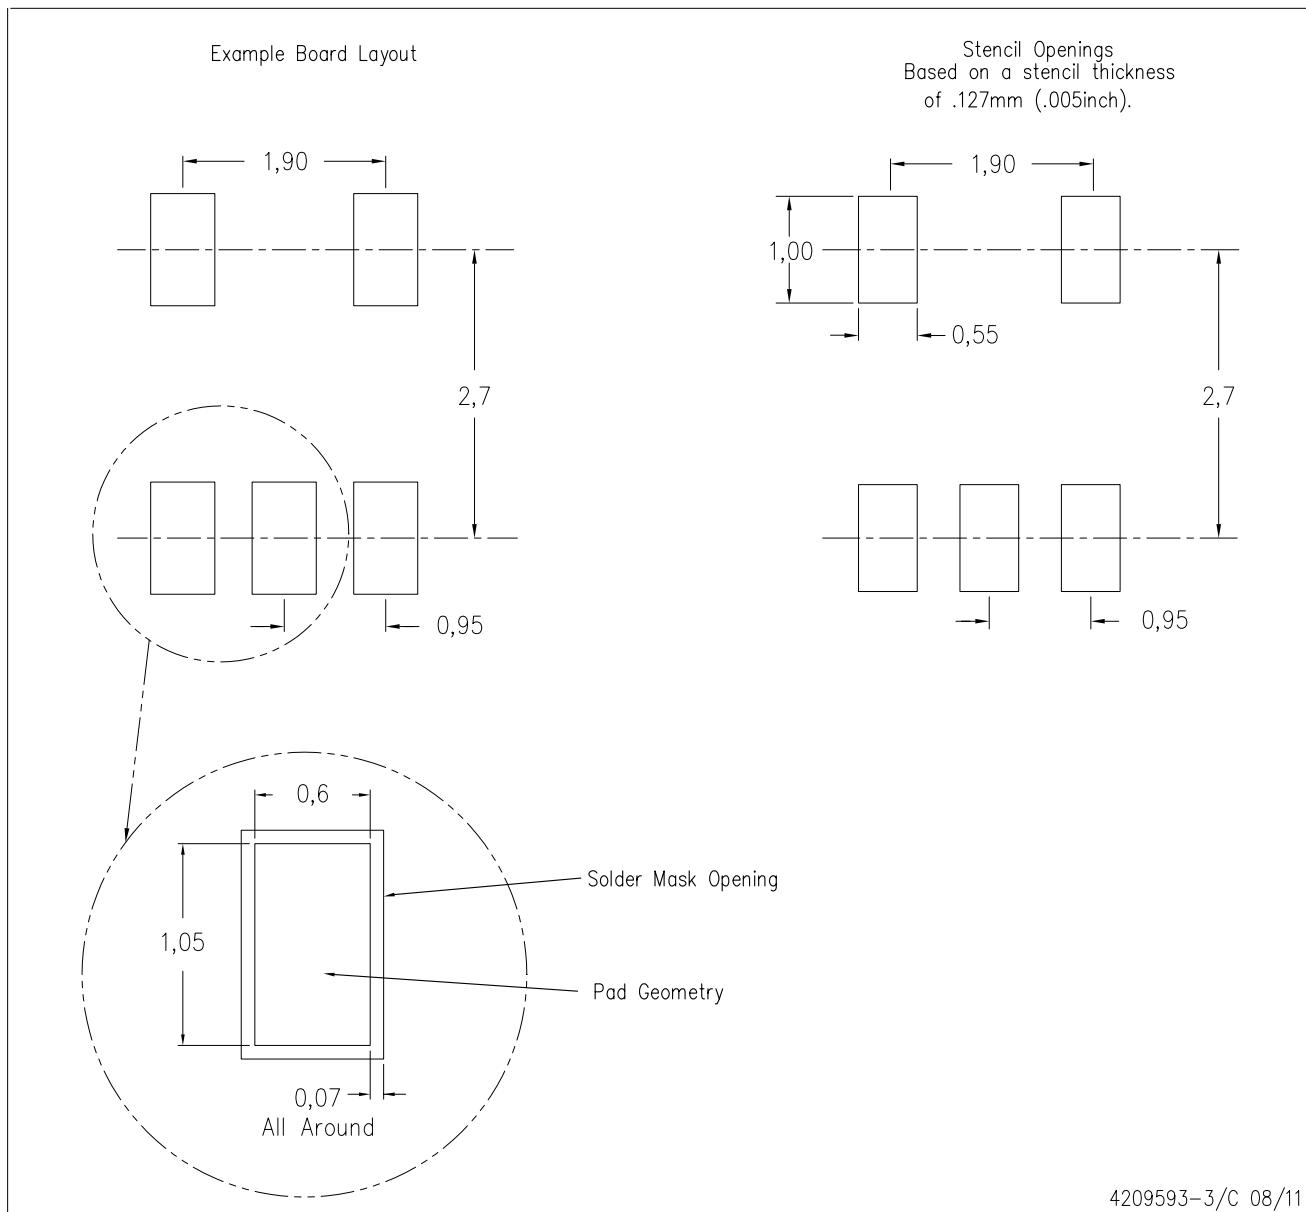
NOTES:

- All linear dimensions are in millimeters.
- This drawing is subject to change without notice.
- Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.15 per side.
- Falls within JEDEC MO-178 Variation AA.

LAND PATTERN DATA

DBV (R-PDSO-G5)

PLASTIC SMALL OUTLINE

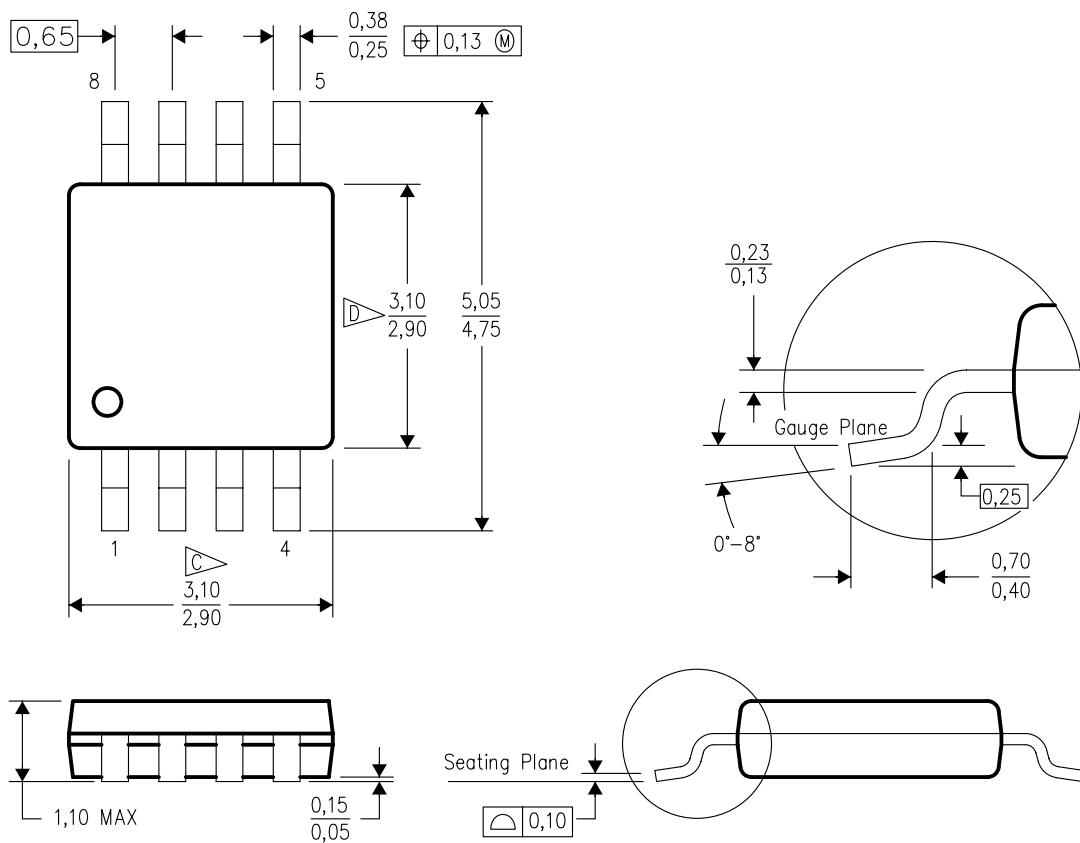


NOTES:

- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C. Customers should place a note on the circuit board fabrication drawing not to alter the center solder mask defined pad.
- D. Publication IPC-7351 is recommended for alternate designs.
- E. Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Example stencil design based on a 50% volumetric metal load solder paste. Refer to IPC-7525 for other stencil recommendations.

DGK (S-PDSO-G8)

PLASTIC SMALL-OUTLINE PACKAGE



4073329/E 05/06

NOTES: A. All linear dimensions are in millimeters.

B. This drawing is subject to change without notice.

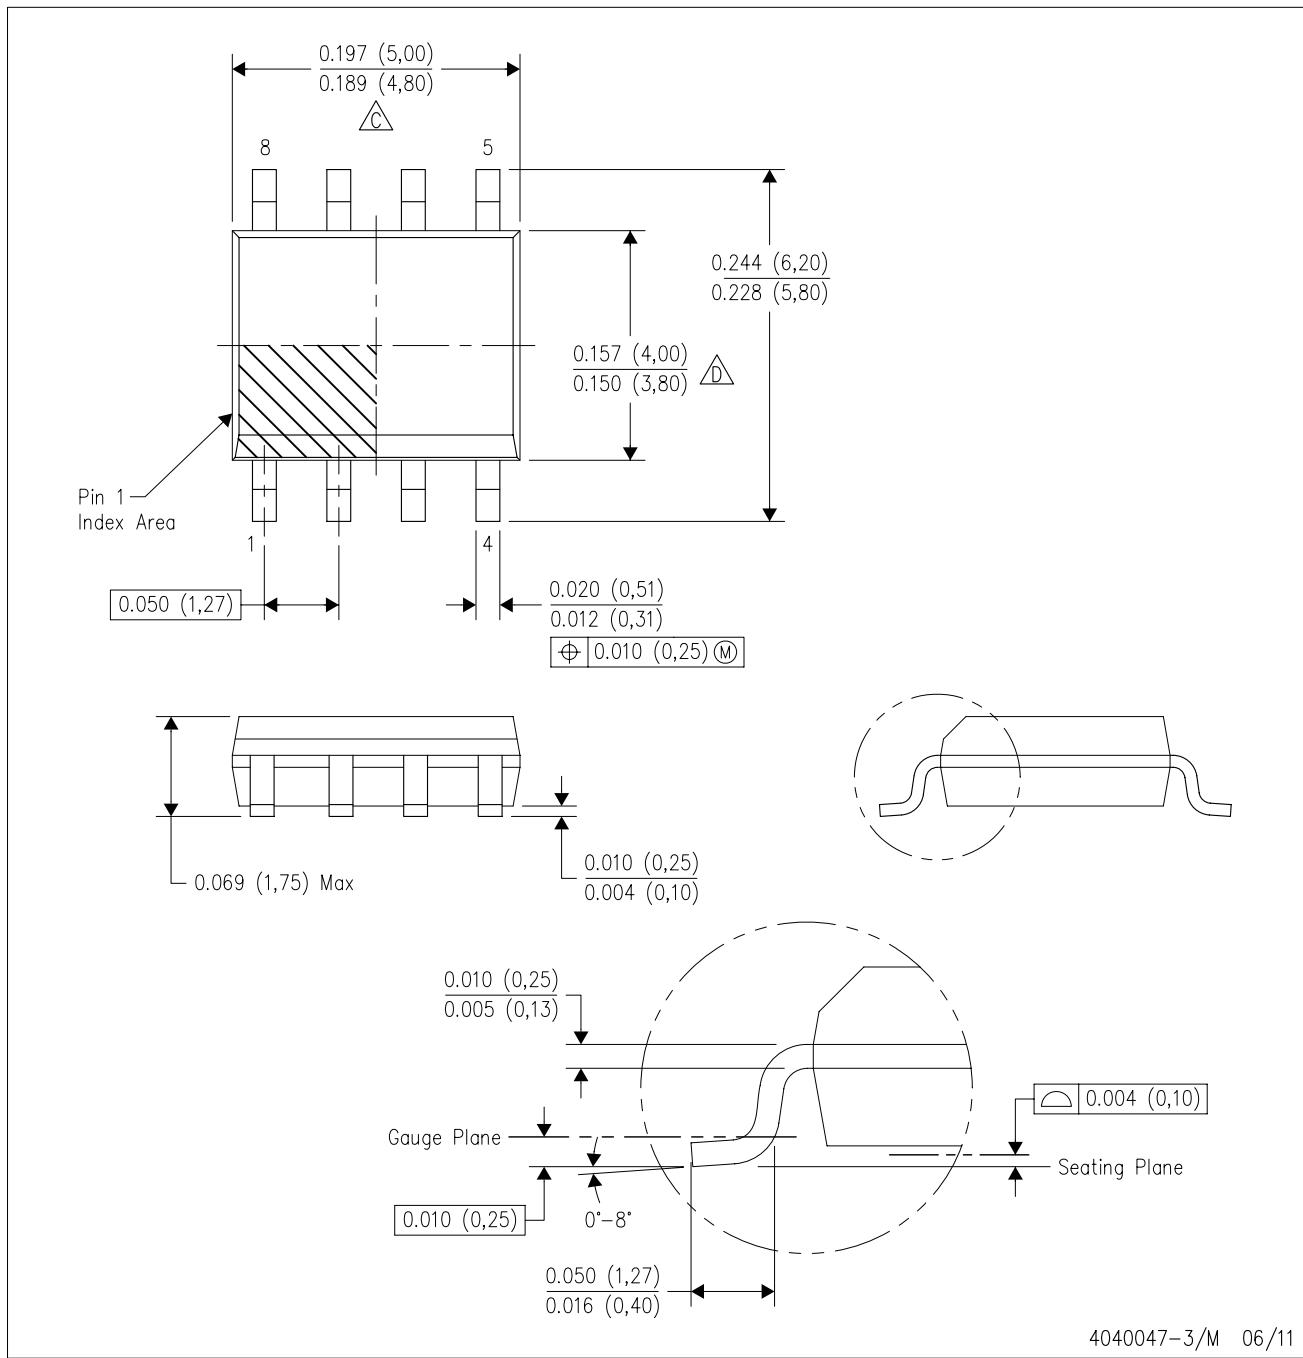
 Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 per end.

 Body width does not include interlead flash. Interlead flash shall not exceed 0.50 per side.

E. Falls within JEDEC MO-187 variation AA, except interlead flash.

D (R-PDSO-G8)

PLASTIC SMALL OUTLINE



NOTES: A. All linear dimensions are in inches (millimeters).

B. This drawing is subject to change without notice.


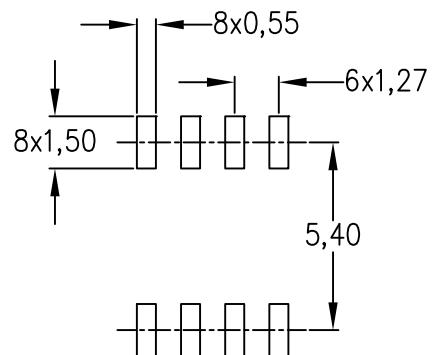
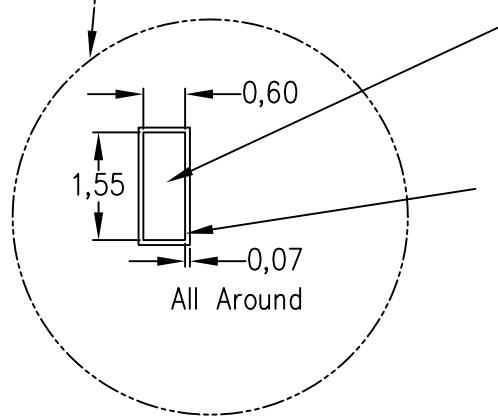
△C Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0.15) each side.

△D Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0.43) each side.

E. Reference JEDEC MS-012 variation AA.

D (R-PDSO-G8)

PLASTIC SMALL OUTLINE

Example Board Layout
(Note C)Stencil Openings
(Note D)Example
Non Soldermask Defined PadExample
Pad Geometry
(See Note C)Example
Solder Mask Opening
(See Note E)

4211283-2/E 08/12

NOTES:

- All linear dimensions are in millimeters.
- This drawing is subject to change without notice.
- Publication IPC-7351 is recommended for alternate designs.
- Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
- Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products	Applications
Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Applications Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity
	TI E2E Community
	e2e.ti.com