

General Description

- Trench Power AlphaMOS (αMOS LV) technology
- Low $R_{SS(ON)}$
- With ESD protection to improve battery performance and safety
- Common drain configuration for design simplicity
- RoHS and Halogen-Free Compliant


Applications

- Battery protection switch
- Mobile device battery charging and discharging

Product Summary

V_{SS}	20V
I_S (at $V_{GS}=4.5V$)	4.5A
$R_{SS(ON)}$ (at $V_{GS}=4.5V$)	< 18mΩ
$R_{SS(ON)}$ (at $V_{GS}=4.0V$)	< 20mΩ
$R_{SS(ON)}$ (at $V_{GS}=3.7V$)	< 21mΩ
$R_{SS(ON)}$ (at $V_{GS}=3.1V$)	< 23mΩ
$R_{SS(ON)}$ (at $V_{GS}=2.5V$)	< 29mΩ

Typical ESD protection

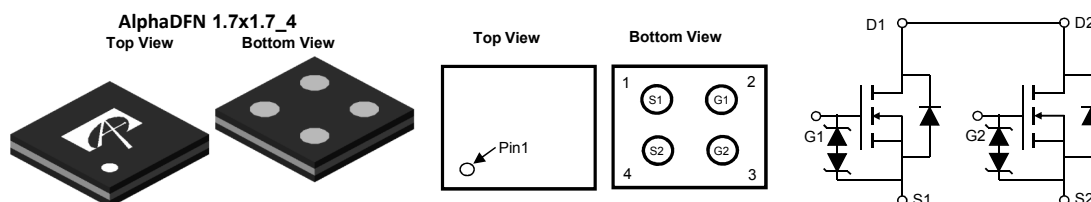HBM Class 3A


Orderable Part Number	Package Type	Form	Minimum Order Quantity
AOC2806	AlphaDFN 1.7x1.7_4	Tape & Reel	3000

Absolute Maximum Ratings $T_A=25^\circ\text{C}$ unless otherwise noted

Parameter	Symbol	Maximum	Units
Source-Source Voltage	V_{SS}	20	V
Gate-Source Voltage	V_{GS}	± 12	V
Source Current(DC) ^{Note 1}	I_S	4.5	A
Source Current(Pulse) ^{Note 2}	I_{SM}	18	A
Power Dissipation ^{Note 1}	P_D	0.7	W
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to 150	$^\circ\text{C}$

Thermal Characteristics

Parameter	Symbol	Typ	Max	Units
Maximum Junction-to-Ambient $t \leq 10s$	$R_{\theta JA}$	115	140	$^\circ\text{C/W}$
Maximum Junction-to-Ambient Steady-State		140	180	$^\circ\text{C/W}$

Note 1. Mounted on 1in2 FR-4 board with 2oz. Copper.

Note 2. PW < 300 μs pulses, duty cycle 0.5% max

Electrical Characteristics (T_J=25°C unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV _{SSS}	Source-Source Breakdown Voltage	I _S =250μA, V _{GS} =0V Test Circuit 6	20			V
I _{SSS}	Zero Gate Voltage Source Current	V _{SS} =20V, V _{GS} =0V Test Circuit 1 T _J =55°C			1 5	μA
I _{GSS}	Gate leakage current	V _{SS} =0V, V _{GS} =±10V Test Circuit 2			±10	μA
V _{GS(th)}	Gate Threshold Voltage	V _{SS} =V _{GS} , I _S =250μA Test Circuit 3	0.5	0.85	1.3	V
R _{SS(ON)}	Static Source to Source On-Resistance	V _{GS} =4.5V, I _S =3A Test Circuit 4 T _J =125°C	10 14	15 20.5	18 25	mΩ
		V _{GS} =4.0V, I _S =3A Test Circuit 4	11	15.8	20	mΩ
		V _{GS} =3.7V, I _S =3A Test Circuit 4	11.5	16.3	21	mΩ
		V _{GS} =3.1V, I _S =3A Test Circuit 4	12.5	17.6	23	mΩ
		V _{GS} =2.5V, I _S =3A Test Circuit 4	14.5	21	29	mΩ
g _{FS}	Forward Transconductance	V _{SS} =5V, I _S =3A Test Circuit 3		16		S
V _{FSS}	Forward Source to Source Voltage	I _S =1A, V _{GS} =0V Test Circuit 5		0.68	1	V
DYNAMIC PARAMETERS						
R _g	Gate resistance	f=1MHz		2		KΩ
SWITCHING PARAMETERS						
Q _g	Total Gate Charge	V _{G1S1} =4.5V, V _{SS} =10V, I _S =3A		12.5		nC
t _{D(on)}	Turn-On DelayTime	V _{G1S1} =4.5V, V _{SS} =10V, R _L =3.3Ω, R _{GEN} =3Ω Test Circuit8		1.0		μs
t _r	Turn-On Rise Time			3.0		μs
t _{D(off)}	Turn-Off DelayTime			2.1		μs
t _f	Turn-Off Fall Time			8.8		μs

THIS PRODUCT HAS BEEN DESIGNED AND QUALIFIED FOR THE CONSUMER MARKET. APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

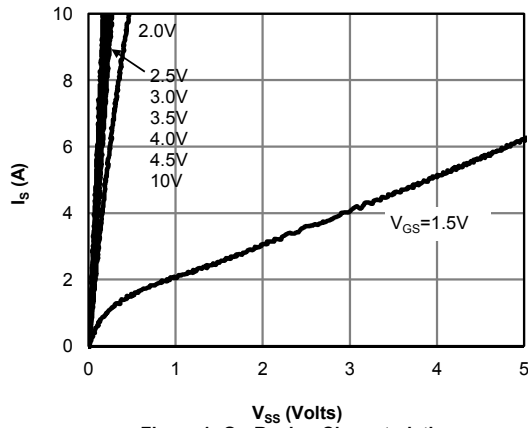


Figure 1: On-Region Characteristics

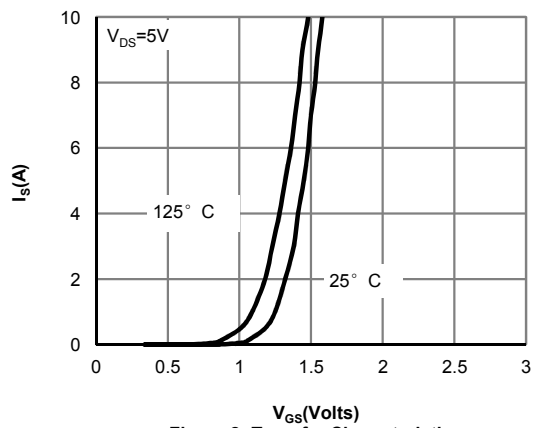


Figure 2: Transfer Characteristics

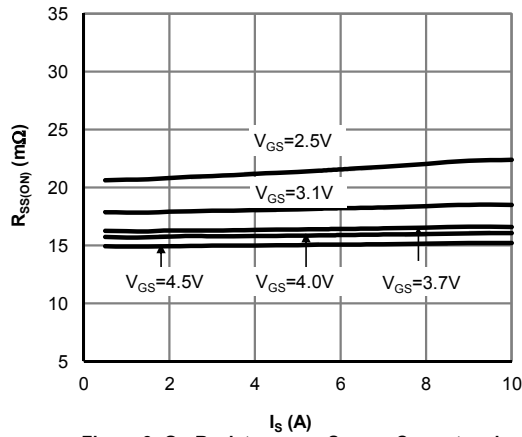


Figure 3: On-Resistance vs. Source Current and Gate Voltage

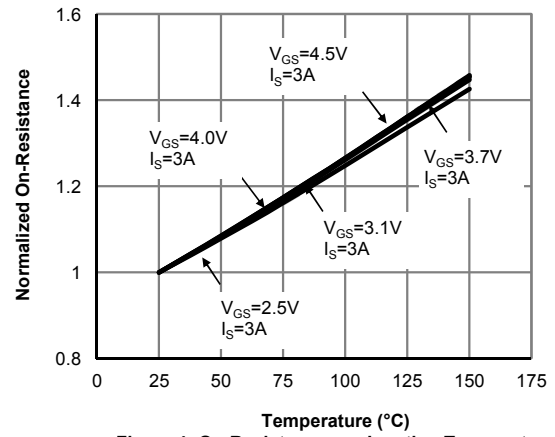


Figure 4: On-Resistance vs. Junction Temperature

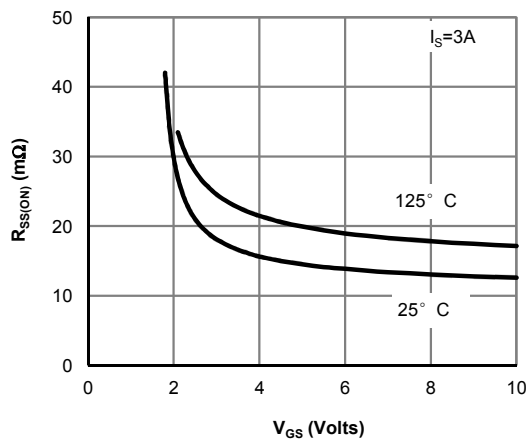


Figure 5: On-Resistance vs. Gate-Source Voltage

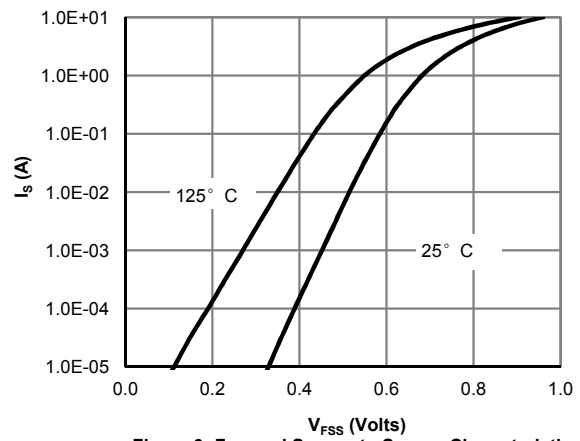


Figure 6: Forward Source to Source Characteristics

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

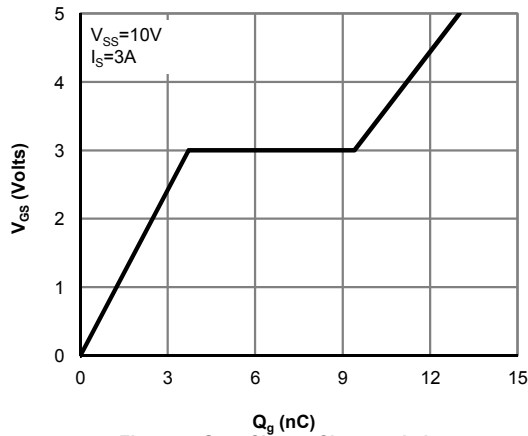


Figure 7: Gate-Charge Characteristics

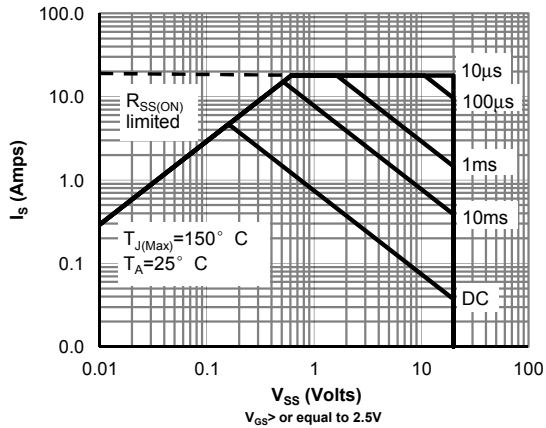


Figure 9: Maximum Forward Biased Safe Operating Area (Note1)

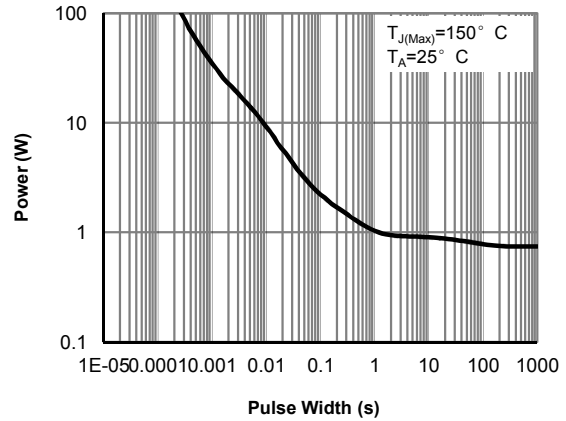


Figure 10: Single Pulse Power Rating Junction-to-Ambient (Note1)


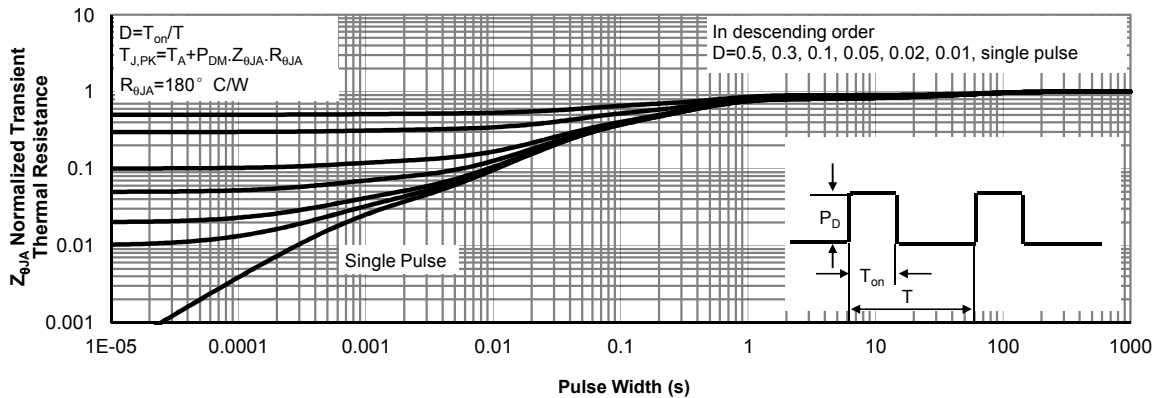


Figure 11: Normalized Maximum Transient Thermal Impedance (Note1)

TEST CIRCUIT 1 I_{SSS}


POSITIVE VSS FOR ISSS+
NEGATIVE VSS FOR ISSS-

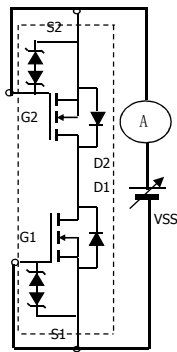

TEST CIRCUIT 2 $I_{GSS1,2}$


POSITIVE VGS FOR IGSS1+
NEGATIVE VGS FOR IGSS1-

When FET1 is measured
between GATE and SOURCE
of FET2 are shorted

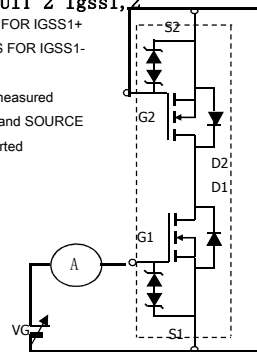


TEST CIRCUIT 3 $V_{GS(off)}$

When FET1 is measured
between GATE and SOURCE
of FET2 are shorted

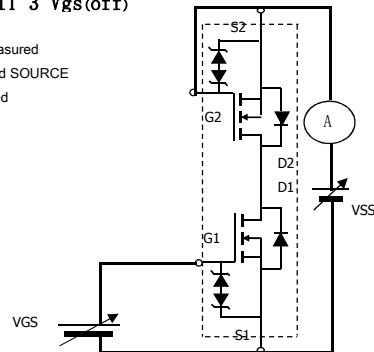


TEST CIRCUIT 4 $R_{SS(on)}$

VSS/Is

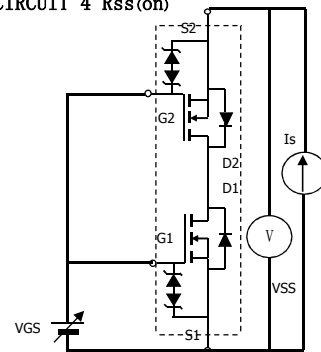


TEST CIRCUIT 5 $V_{F(SS)1,2}$

When FET1 measured
FET2 $V_{GS}=4.5V$

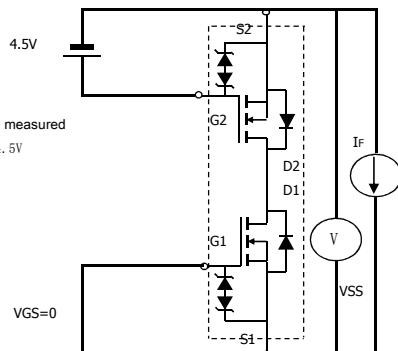

TEST CIRCUIT 6 BV_{DSS}


POSITIVE VSS FOR ISSS+
NEGATIVE VSS FOR ISSS-

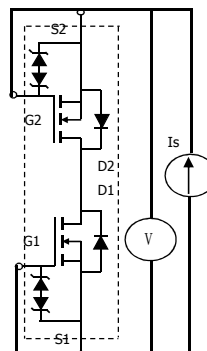

TEST CIRCUIT 7 $BV_{GS01,2}$

POSITIVE VSS FOR ISSS+
NEGATIVE VSS FOR ISSS-

When FET1 is measured
between GATE and SOURCE
of FET2 are shorted

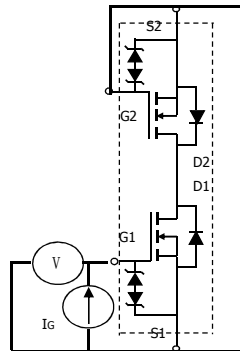

TEST CIRCUIT 8

Switching time

