

- Eight Line Receivers Meet or Exceed the Requirements of ANSI TIA/EIA-644 Standard
- Integrated 110- Ω Line Termination Resistors on LVDT Products
- Designed for Signaling Rates[†] Up To 630 Mbps
- SN65 Version's Bus-Terminal ESD Exceeds 15 kV
- Operates From a Single 3.3-V Supply
- Propagation Delay Time of 2.6 ns (Typ)
- Output Skew 100 ps (Typ)
Part-To-Part Skew Is Less Than 1 ns
- LVTTL Levels Are 5-V Tolerant
- Open-Circuit Fail Safe
- Flow-Through Pin Out
- Packaged in Thin Shrink Small-Outline Package With 20-mil Terminal Pitch

NOT RECOMMENDED FOR NEW DESIGNS For Replacement Use 'LVDx388A

'LVDS388, 'LVDT388
DBT PACKAGE
(TOP VIEW)


| | | | |
|-----|----|----|-----------------|
| A1A | 1 | 38 | GND |
| A1B | 2 | 37 | V _{CC} |
| A2A | 3 | 36 | ENA |
| A2B | 4 | 35 | A1Y |
| NC | 5 | 34 | A2Y |
| B1A | 6 | 33 | ENB |
| B1B | 7 | 32 | B1Y |
| B2A | 8 | 31 | B2Y |
| B2B | 9 | 30 | GND |
| NC | 10 | 29 | V _{CC} |
| C1A | 11 | 28 | GND |
| C1B | 12 | 27 | C1Y |
| C2A | 13 | 26 | C2Y |
| C2B | 14 | 25 | ENC |
| NC | 15 | 24 | D1Y |
| D1A | 16 | 23 | D2Y |
| D1B | 17 | 22 | END |
| D2A | 18 | 21 | V _{CC} |
| D2B | 19 | 20 | GND |

description

The 'LVDS388 and 'LVDT388 (*T* designates integrated termination) are eight differential line receivers that implement the electrical characteristics of low-voltage differential signaling (LVDS). This signaling technique lowers the output voltage levels of 5-V differential standard levels (such as EIA/TIA-422B) to reduce the power, increase the switching speeds, and allow operation with a 3-V supply rail. Any of the eight differential receivers will provide a valid logical output state with a ± 100 -mV differential input voltage within the input common-mode voltage range. The input common-mode voltage range allows 1 V of ground potential difference between two LVDS nodes. Additionally, the high-speed switching of LVDS signals always require the use of a line impedance matching resistor at the receiving end of the cable or transmission media. The LVDT product eliminates this external resistor by integrating it with the receiver.

logic diagram (positive logic)

'LVDx388

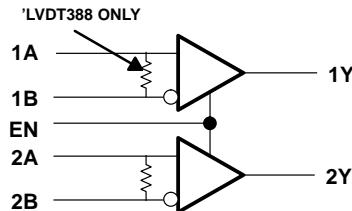

(1/4 of 'LVDx388 shown)



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

[†] Signaling rate, 1/t, where t is the minimum unit interval and is expressed in the units bits/s (bits per second)

SN65LVDS388, SN65LVDT388, SN75LVDS388, SN75LVDT388 HIGH-SPEED DIFFERENTIAL LINE RECEIVERS

SLLS448A – SEPTEMBER 2000 – REVISED MAY 2001

description (continued)

The intended application of this device and signaling technique is for point-to-point baseband data transmission over controlled impedance media of approximately $100\ \Omega$. The transmission media may be printed-circuit board traces, backplanes, or cables. The large number of drivers integrated into the same substrate along with the low pulse skew of balanced signaling, allows extremely precise timing alignment of clock and data for synchronous parallel data transfers. When used with its companion, 8-channel driver, the SN65LVDS389 over 150 million data transfers per second in single-edge clocked systems are possible with very little power. Note: The ultimate rate and distance of data transfer is dependent upon the attenuation characteristics of the media, the noise coupling to the environment, and other system characteristics.

The SN65LVDS388 and SN65LVDT388 is characterized for operation from -40°C to 85°C . The SN75LVDS388 and SN75LVDT388 is characterized for operation from 0°C to 70°C .

AVAILABLE OPTIONS

| PART NUMBER | TEMPERATURE RANGE | NUMBER OF RECEIVERS | BUS-PIN ESD |
|----------------|---|---------------------|-------------|
| SN65LVDS388DBT | -40°C to 85°C | 8 | 15 kV |
| SN65LVDT388DBT | -40°C to 85°C | 8 | 15 kV |
| SN75LVDS388DBT | 0°C to 70°C | 8 | 4 kV |
| SN75LVDT388DBT | 0°C to 70°C | 8 | 4 kV |


Function Table

SNx5LVD388 and SNx5LVDT388

| DIFFERENTIAL INPUT | ENABLES | OUTPUT |
|--|---------|--------|
| A-B | EN | Y |
| $V_{ID} \geq 100\ \text{mV}$ | H | H |
| $-100\ \text{mV} < V_{ID} \leq 100\ \text{mV}$ | H | ? |
| $V_{ID} \leq -100\ \text{mV}$ | H | L |
| X | L | Z |
| Open | H | H |

H = high level, L = low level, X = irrelevant,
Z = high impedance (off), ? = indeterminate

equivalent input and output schematic diagrams

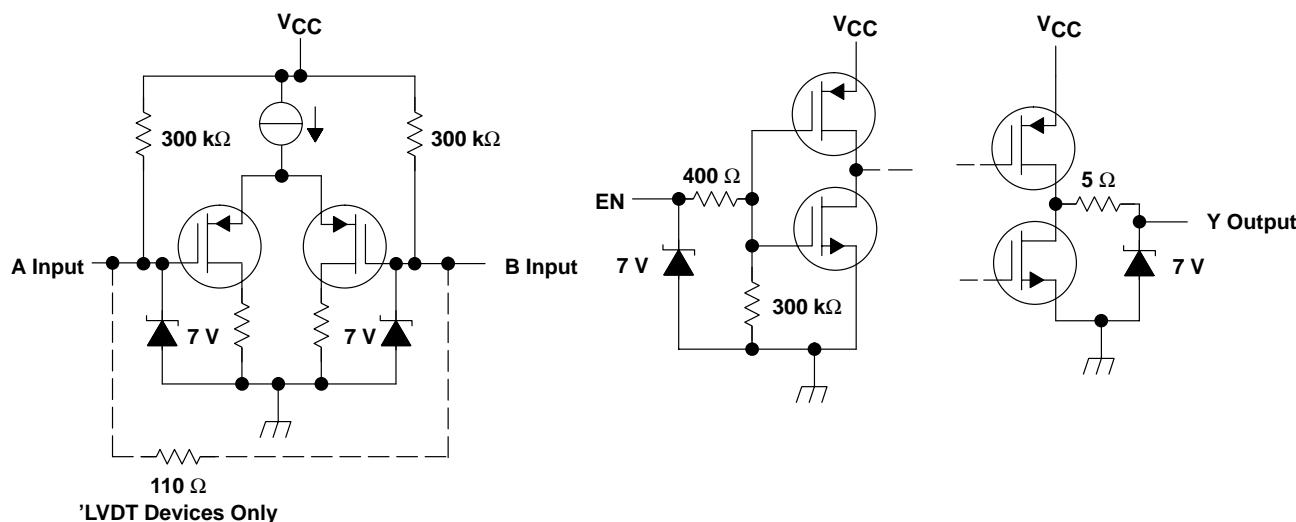

absolute maximum ratings over operating free-air temperature (unless otherwise noted)†

| | | |
|--|-------|------------------------------|
| Supply voltage range, V_{CC} (see Note 1) | | -0.5 V to 4 V |
| Voltage range: Enables or Y | | -0.5 V to 6 V |
| A or B | | -0.5 V to 4 V |
| Electrostatic discharge: (see Note 2) | | |
| SN65' (A, B, and GND) | | Class 3, A:15 kV, B: 700 V |
| SN75' (A, B, and GND) | | Class 2, A:4 kV, B: 400 V |
| Continuous power dissipation | | See Dissipation Rating Table |
| Storage temperature range | | -65°C to 150°C |
| Lead temperature 1,6 mm (1/16 in) from case for 10 seconds | | 260°C |

† Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. All voltage values, except differential I/O bus voltages, are with respect to network ground terminal.
 2. Tested in accordance with MIL-STD-883C Method 3015.7.

DISSIPATION RATING TABLE

| PACKAGE | $T_A \leq 25^\circ\text{C}$ | DERATING FACTOR‡ ABOVE $T_A = 25^\circ\text{C}$ | $T_A = 70^\circ\text{C}$ POWER RATING | $T_A = 85^\circ\text{C}$ POWER RATING |
|---------|-----------------------------|--|--|--|
| DBT | 1071 mW | 8.5 mW/°C | 688 mW | 556 mW |

‡ This is the inverse of the junction-to-ambient thermal resistance when board-mounted (low-k) and with no air flow.

recommended operating conditions

| | | MIN | NOM | MAX | UNIT |
|---|---------|----------------------|----------------------------|----------------|------|
| Supply voltage, V_{CC} | | 3 | 3.3 | 3.6 | V |
| High-level input voltage, V_{IH} | Enables | 2 | | | V |
| Low-level input voltage, V_{IL} | Enables | | | 0.8 | V |
| Magnitude of differential input voltage, $ V_{ID} $ | | 0.1 | 0.6 | | V |
| Common-mode input voltage, V_{IC} (see Figure 4) | | $\frac{ V_{ID} }{2}$ | $2.4 - \frac{ V_{ID} }{2}$ | $V_{CC} - 0.8$ | V |
| Operating free-air temperature, T_A | SN75' | 0 | 70 | | °C |
| | SN65' | -40 | 85 | | °C |

SN65LVDS388, SN65LVDT388, SN75LVDS388, SN75LVDT388 HIGH-SPEED DIFFERENTIAL LINE RECEIVERS

SLLS448A – SEPTEMBER 2000 – REVISED MAY 2001

electrical characteristics over recommended operating conditions (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP† | MAX | UNIT |
|---------------------|---|--|---|------|------|------|
| V _{IT+} | | See Figure 1 and Table 1 | | | 100 | mV |
| V _{IT-} | | | | | -100 | mV |
| V _{OH} | | I _{OH} = -8 mA | 2.4 | 3 | | V |
| V _{OL} | | I _{OL} = 8 mA | 0.2 | 0.4 | | V |
| I _{CC} | | Enabled, No load | 50 | 70 | | mA |
| | | Disabled | 3 | | | mA |
| I _I | 'LVDS | V _I = 0 V | -13 | -20 | | µA |
| | | V _I = 2.4 V | -1.2 | -3 | | |
| | 'LVDT | V _I = 0 V, other input open | | -40 | | |
| | | V _I = 2.4 V, other input open | | -2.4 | | |
| I _{ID} | Differential input current I _{IA} - I _{IB} | 'LVDS | V _{IA} = 0 V, V _{IB} = 0.1 V, V _{IA} = 2.4 V, V _{IB} = 2.3 V | | ±2 | µA |
| I _{ID} | Differential input current (I _{IA} - I _{IB}) | 'LVDT | V _{IA} = 0.2 V, V _{IB} = 0 V, V _{IA} = 2.4 V, V _{IB} = 2.2 V | 1.5 | 2.2 | mA |
| I _{I(OFF)} | Power-off input current (A or B inputs) | 'LVDS | V _{CC} = 0 V, V _I = 2.4 V | 12 | ±20 | µA |
| I _{I(OFF)} | Power-off input current (A or B inputs) | 'LVDT | V _{CC} = 0 V, V _I = 2.4 V | | ±40 | µA |
| I _{IH} | High-level input current (enables) | | V _{IH} = 2 V | | 10 | µA |
| I _{IL} | Low-level input current (enables) | | V _{IL} = 0.8 V | | 10 | µA |
| I _{OZ} | High-impedance output current | | V _O = 0 V | | ±1 | µA |
| | | | V _O = 3.6 V | | 10 | |
| C _{IN} | Input capacitance, A or B input to GND | | V _{ID} = 0.4 sin 2.5E09 t V | | 5 | pF |
| Z _(t) | Termination impedance | | V _{ID} = 0.4 sin 2.5E09 t V | 88 | 132 | Ω |

† All typical values are at 25°C and with a 3.3-V supply.

switching characteristics over recommended operating conditions (unless otherwise noted)

| PARAMETER | | TEST CONDITIONS | MIN | TYP† | MAX | UNIT | |
|---------------------|--|-----------------|-----|------|------|------|--|
| t _{PLH} | | See Figure 2 | 1 | 2.6 | 4 | ns | |
| t _{PHL} | | | 1 | 2.5 | 4 | ns | |
| t _r | | | 500 | 800 | 1200 | ps | |
| t _f | | | 500 | 800 | 1200 | ps | |
| t _{sk(p)} | | | | 150 | 600 | ps | |
| t _{sk(o)} | | | | 100 | 400 | ps | |
| t _{sk(pp)} | | | | | 1 | ns | |
| t _{PZH} | | See Figure 3 | 7 | 15 | | ns | |
| t _{PZL} | | | 7 | 15 | | ns | |
| t _{PHZ} | | | 7 | 15 | | ns | |
| t _{PLZ} | | | 7 | 15 | | ns | |

† All typical values are at 25°C and with a 3.3-V supply.

‡ t_{sk(o)} is the magnitude of the time difference between the t_{PLH} or t_{PHL} of all drivers of a single device with all of their inputs connected together.

§ t_{sk(pp)} is the magnitude of the difference in propagation delay times between any specified terminals of any two devices characterized in this data sheet when both devices operate with the same supply voltage, at the same temperature, and have the same test circuits.

PARAMETER MEASUREMENT INFORMATION

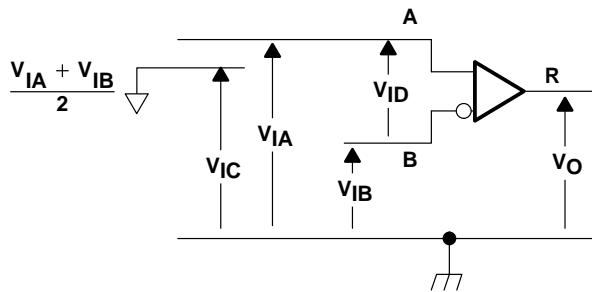


Figure 1. Voltage Definitions


Table 1. Receiver Minimum and Maximum Input Threshold Test Voltages

| APPLIED VOLTAGES | | RESULTING DIFFERENTIAL INPUT VOLTAGE | RESULTING COMMON-MODE INPUT VOLTAGE |
|------------------|----------|--------------------------------------|-------------------------------------|
| V_{IA} | V_{IB} | V_{ID} | V_{IC} |
| 1.25 V | 1.15 V | 100 mV | 1.2 V |
| 1.15 V | 1.25 V | -100 mV | 1.2 V |
| 2.4 V | 2.3 V | 100 mV | 2.35 V |
| 2.3 V | 2.4 V | -100 mV | 2.35 V |
| 0.1 V | 0 V | 100 mV | 0.05 V |
| 0 V | 0.1 V | -100 mV | 0.05 V |
| 1.5 V | 0.9 V | 600 mV | 1.2 V |
| 0.9 V | 1.5 V | -600 mV | 1.2 V |
| 2.4 V | 1.8 V | 600 mV | 2.1 V |
| 1.8 V | 2.4 V | -600 mV | 2.1 V |
| 0.6 V | 0 V | 600 mV | 0.3 V |
| 0 V | 0.6 V | -600 mV | 0.3 V |

SN65LVDS388, SN65LVDT388, SN75LVDS388, SN75LVDT388 HIGH-SPEED DIFFERENTIAL LINE RECEIVERS

SLLS448A – SEPTEMBER 2000 – REVISED MAY 2001


PARAMETER MEASUREMENT INFORMATION

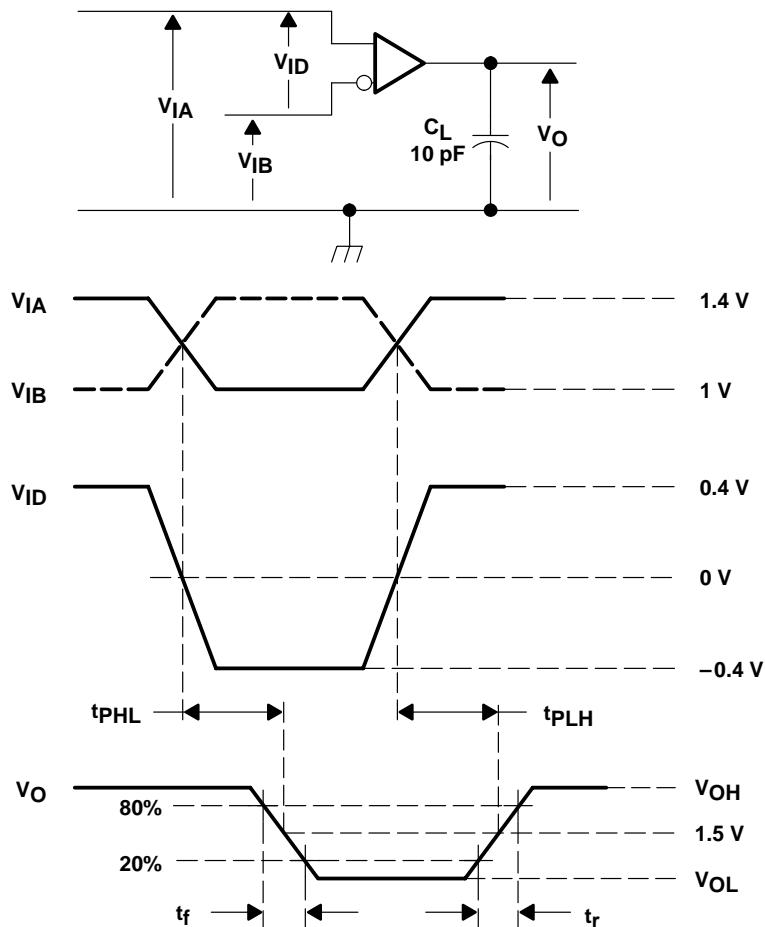

NOTE: All input pulses are supplied by a generator having the following characteristics: t_f or $t_f \leq 1 \text{ ns}$, pulse repetition rate (PRR) = 50 Mpps, pulse width = $10 \pm 0.2 \text{ ns}$. C_L includes instrumentation and fixture capacitance within 0.06 m of the D.U.T.

Figure 2. Timing Test Circuit and Wave Forms


PARAMETER MEASUREMENT INFORMATION

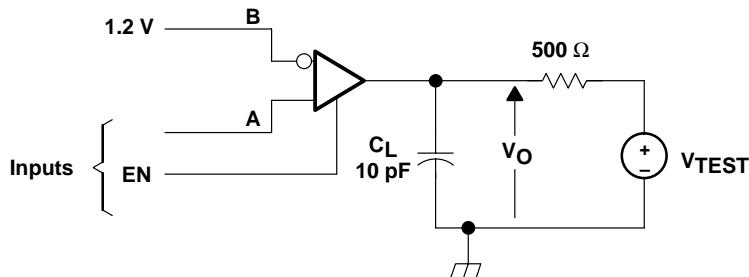

NOTE A: All input pulses are supplied by a generator having the following characteristics: t_r or $t_f \leq 1$ ns, pulse repetition rate (PRR) = 0.5 Mpps, pulse width = 500 ± 10 ns. C_L includes instrumentation and fixture capacitance within 0,06 m of the D.U.T.

V_{TEST} —————— 2.5 V

A —————— 1 V

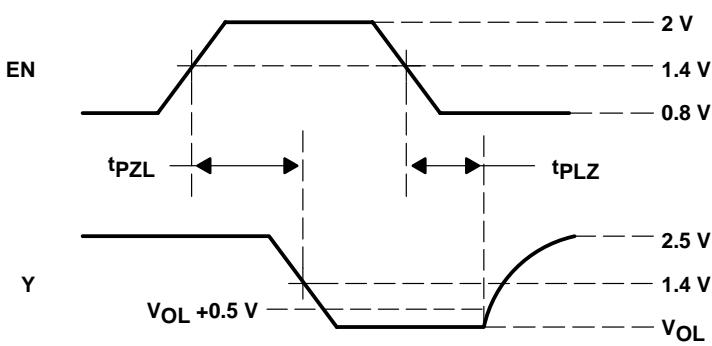

V_{TEST} —————— 0 V

A —————— 1.4 V

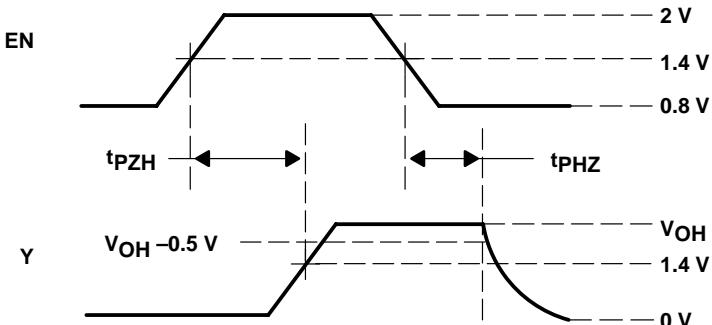


Figure 3. Enable/Disable Time Test Circuit and Wave Forms

SN65LVDS388, SN65LVDT388, SN75LVDS388, SN75LVDT388 HIGH-SPEED DIFFERENTIAL LINE RECEIVERS

SLLS448A – SEPTEMBER 2000 – REVISED MAY 2001

TYPICAL CHARACTERISTICS

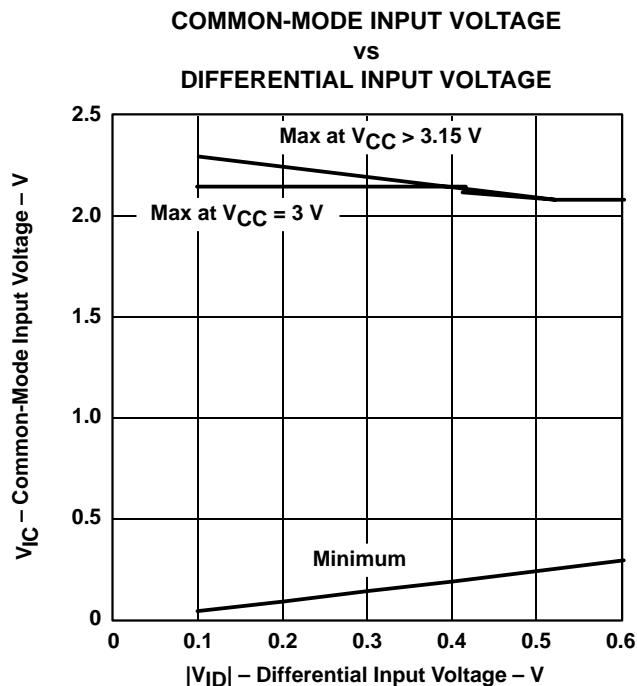


Figure 4

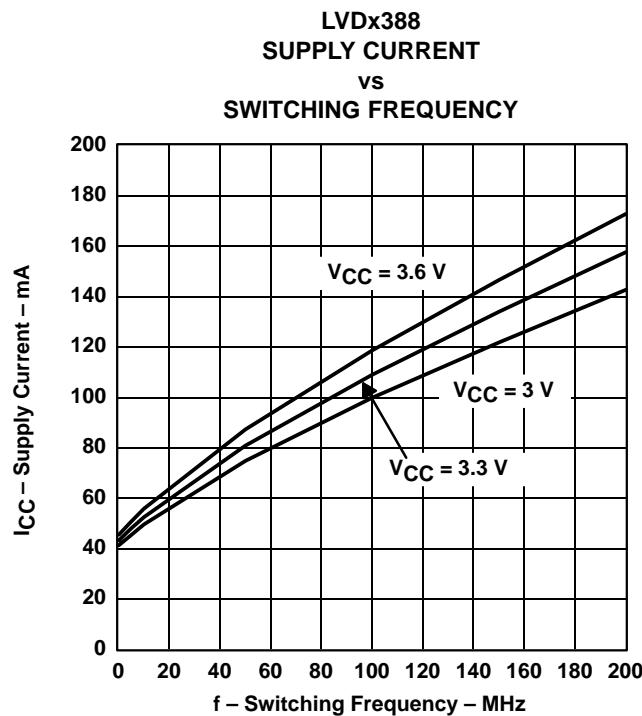


Figure 5

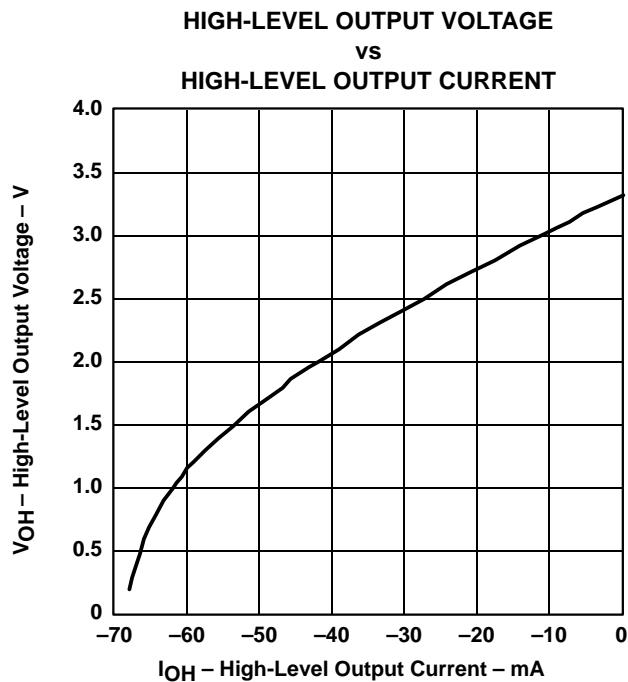


Figure 6

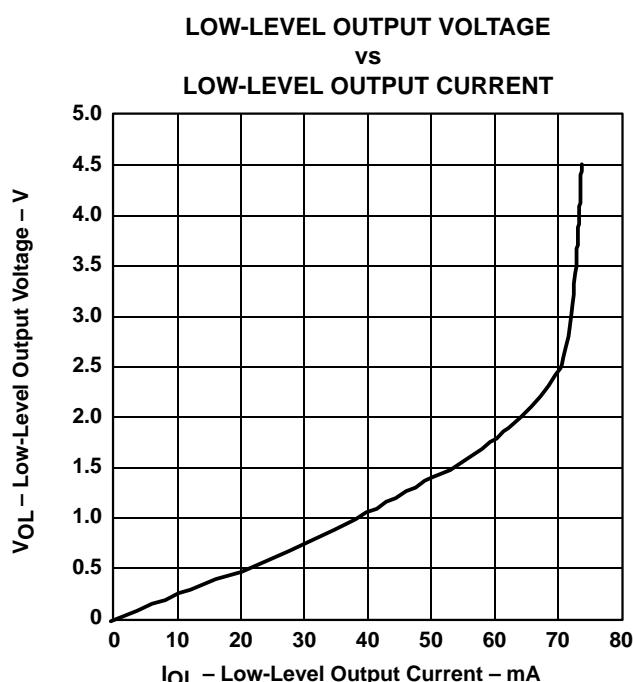


Figure 7

TYPICAL CHARACTERISTICS

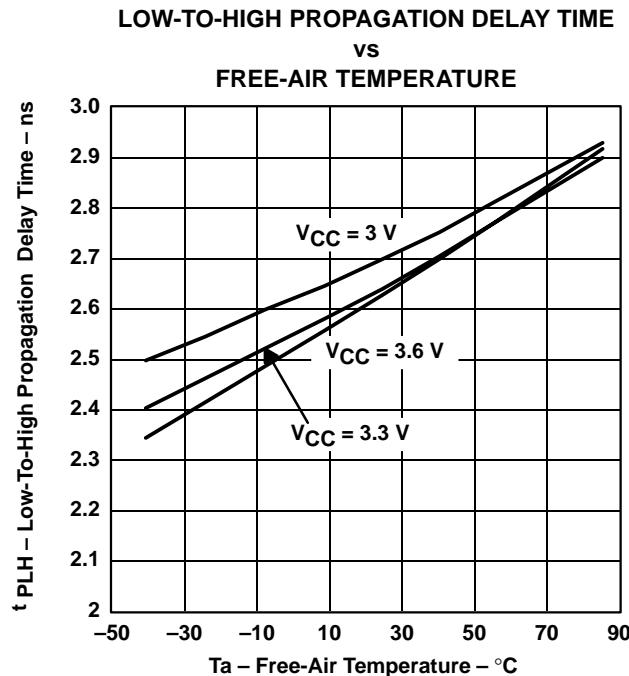


Figure 8

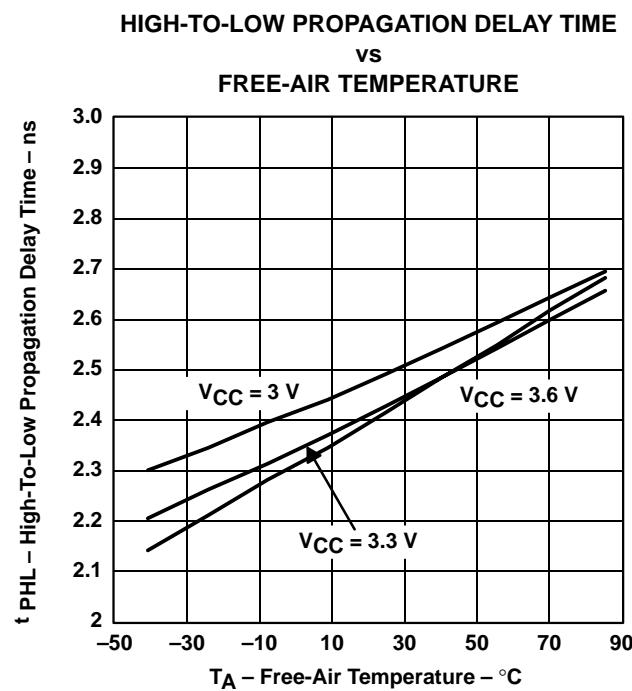


Figure 9

SN65LVDS388, SN65LVDT388, SN75LVDS388, SN75LVDT388 HIGH-SPEED DIFFERENTIAL LINE RECEIVERS

SLLS448A – SEPTEMBER 2000 – REVISED MAY 2001

APPLICATION INFORMATION

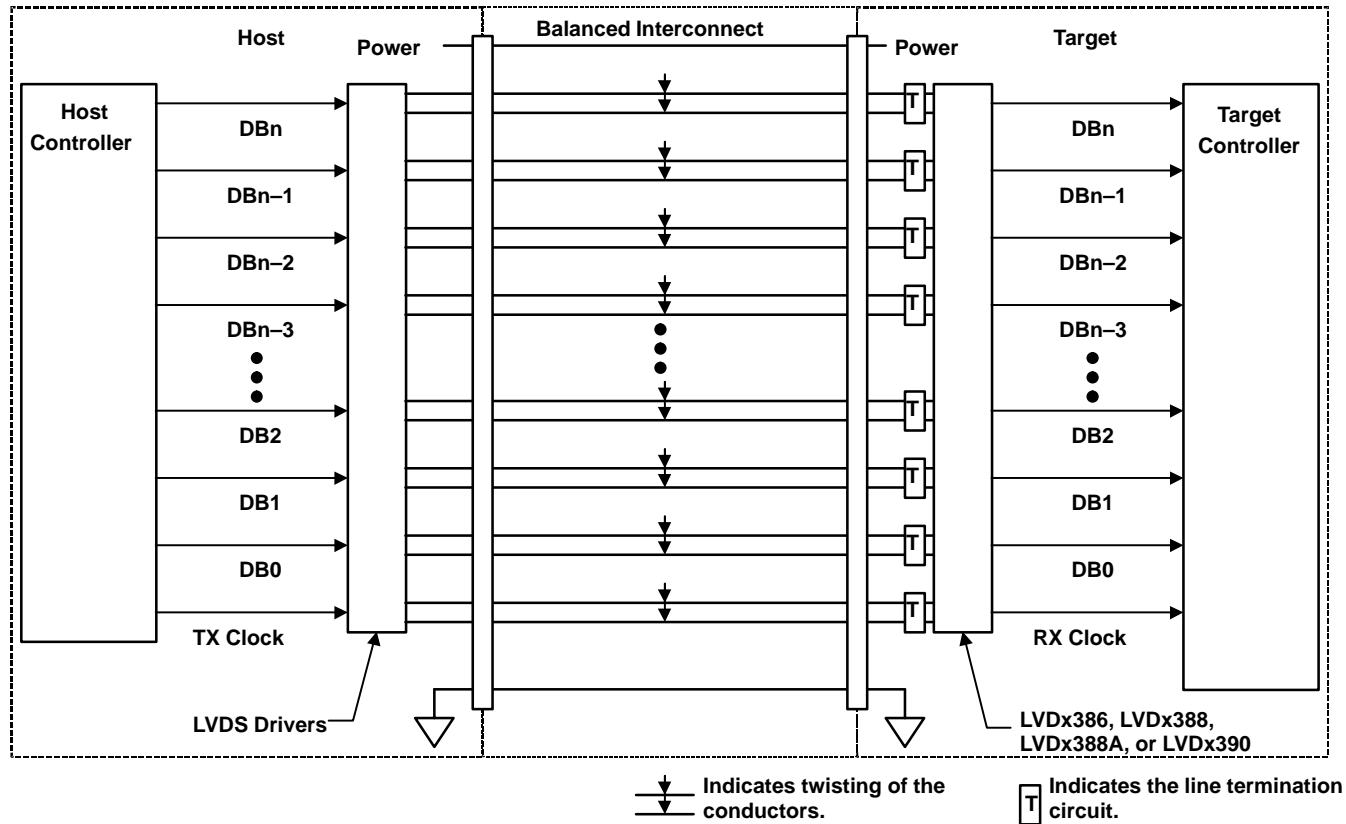


Figure 10. Typical Application Schematic

APPLICATION INFORMATION

fail safe

One of the most common problems with differential signaling applications is how the system responds when no differential voltage is present on the signal pair. The LVDS receiver is like most differential line receivers, in that its output logic state can be indeterminate when the differential input voltage is between -100 mV and 100 mV and within its recommended input common-mode voltage range. TI's LVDS receiver is different in how it handles the open-input circuit situation, however.

Open-circuit means that there is little or no input current to the receiver from the data line itself. This could be when the driver is in a high-impedance state or the cable is disconnected. When this occurs, the LVDS receiver will pull each line of the signal pair to near V_{CC} through $300\text{-k}\Omega$ resistors as shown in Figure 10. The fail-safe feature uses an AND gate with input voltage thresholds at about 2.3 V to detect this condition and force the output to a high-level regardless of the differential input voltage.

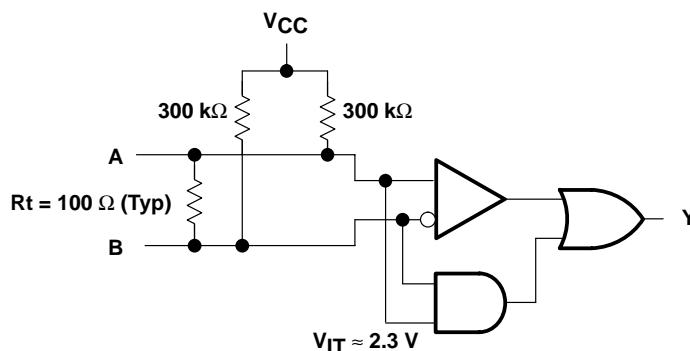


Figure 11. Open-Circuit Fail Safe of the LVDS Receiver

It is only under these conditions that the output of the receiver will be valid with less than a 100 -mV differential input voltage magnitude. The presence of the termination resistor, R_t , does not affect the fail-safe function as long as it is connected as shown in the figure. Other termination circuits may allow a dc current to ground that could defeat the pullup currents from the receiver and the fail-safe feature.

SN65LVDS388, SN65LVDT388, SN75LVDS388, SN75LVDT388 HIGH-SPEED DIFFERENTIAL LINE RECEIVERS


SLLS448A – SEPTEMBER 2000 – REVISED MAY 2001

MECHANICAL DATA

DBT (R-PDSO-G**)

30 PINS SHOWN

PLASTIC SMALL-OUTLINE PACKAGE

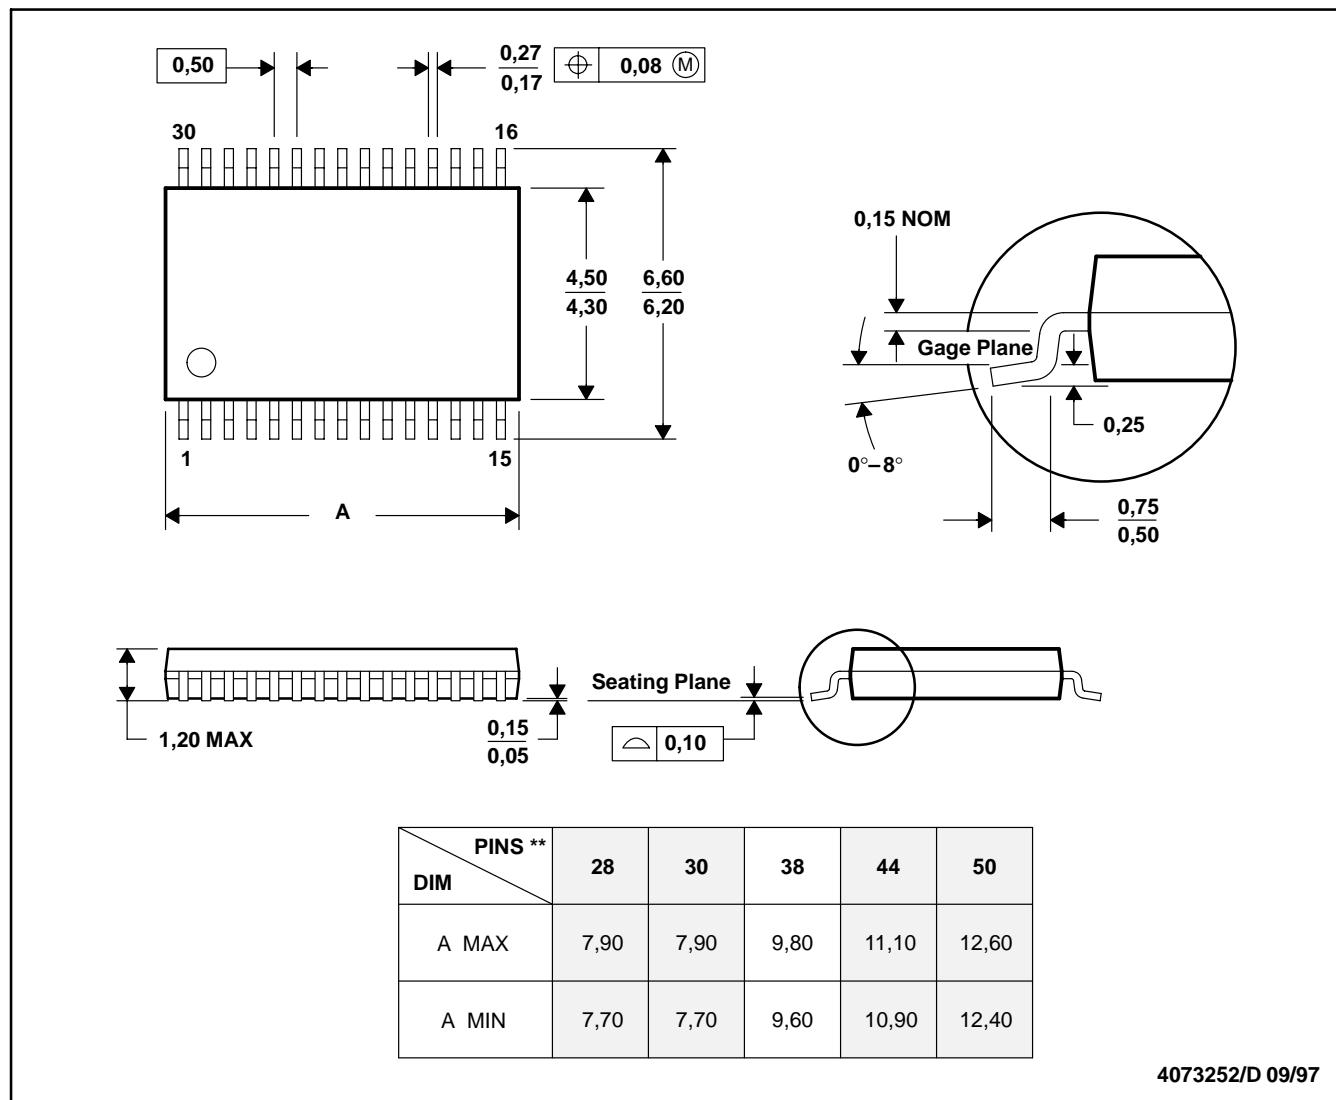

NOTES: A. All linear dimensions are in millimeters.
 B. This drawing is subject to change without notice.
 C. Body dimensions do not include mold flash or protrusion.
 D. Falls within JEDEC MO-153

PACKAGING INFORMATION

| Orderable Device | Status ⁽¹⁾ | Package Type | Package Drawing | Pins | Package Qty | Eco Plan ⁽²⁾ | Lead/Ball Finish | MSL Peak Temp ⁽³⁾ |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| SN65LVDS388DBT | NRND | SM8 | DBT | 38 | | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| SN65LVDS388DBTR | NRND | SM8 | DBT | 38 | | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| SN65LVDT388DBT | OBsolete | SM8 | DBT | 38 | | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| SN65LVDT388DBTG4 | ACTIVE | SM8 | DBT | 38 | 50 | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| SN65LVDT388DBTR | OBsolete | SM8 | DBT | 38 | | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| SN75LVDS388DBT | NRND | SM8 | DBT | 38 | | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| SN75LVDS388DBTR | NRND | SM8 | DBT | 38 | | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| SN75LVDT388DBT | OBsolete | SM8 | DBT | 38 | | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |
| SN75LVDT388DBTR | OBsolete | SM8 | DBT | 38 | | Green (RoHS & no Sb/Br) | CU NIPDAU | Level-2-260C-1 YEAR |

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBsolete: TI has discontinued the production of the device.

⁽²⁾ Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

⁽³⁾ MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

| Products | | Applications | |
|--------------------|--|---------------------|--|
| Amplifiers | amplifier.ti.com | Audio | www.ti.com/audio |
| Data Converters | dataconverter.ti.com | Automotive | www.ti.com/automotive |
| DSP | dsp.ti.com | Broadband | www.ti.com/broadband |
| Interface | interface.ti.com | Digital Control | www.ti.com/digitalcontrol |
| Logic | logic.ti.com | Military | www.ti.com/military |
| Power Mgmt | power.ti.com | Optical Networking | www.ti.com/opticalnetwork |
| Microcontrollers | microcontroller.ti.com | Security | www.ti.com/security |
| Low Power Wireless | www.ti.com/lpw | Telephony | www.ti.com/telephony |
| | | Video & Imaging | www.ti.com/video |
| | | Wireless | www.ti.com/wireless |

Mailing Address: Texas Instruments
Post Office Box 655303 Dallas, Texas 75265

Copyright © 2006, Texas Instruments Incorporated