

To our customers,

---

## Old Company Name in Catalogs and Other Documents

---

On April 1<sup>st</sup>, 2010, NEC Electronics Corporation merged with Renesas Technology Corporation, and Renesas Electronics Corporation took over all the business of both companies. Therefore, although the old company name remains in this document, it is a valid Renesas Electronics document. We appreciate your understanding.

Renesas Electronics website: <http://www.renesas.com>

April 1<sup>st</sup>, 2010  
Renesas Electronics Corporation

Issued by: Renesas Electronics Corporation (<http://www.renesas.com>)

Send any inquiries to <http://www.renesas.com/inquiry>.

## Notice

1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or others.
3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the use of these circuits, software, or information.
5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
7. Renesas Electronics products are classified according to the following three quality grades: "Standard", "High Quality", and "Specific". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as "Specific" without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as "Specific" or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is "Standard" unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc.

"Standard": Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools; personal electronic equipment; and industrial robots.

"High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.

"Specific": Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult, please evaluate the safety of the final products or system manufactured by you.
10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics.
12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.

(Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries.

(Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics.

# $\mu$ PD121WxxA Series

## HIGH CURRENT 1.5 A GENERAL-PURPOSE CMOS REGULATOR

### DESCRIPTION

The  $\mu$ PD121WxxA series is general-purpose CMOS regulators which have 1.5 A output current capacity. These products are suitable for power supply of large-scale ASICs etc. By ON/OFF function, the power consumption can be kept low level at the time of off-state. This series of regulator has 3 fixed output voltage type 1.8 V, 2.5 V, 3.3 V, and adjustable output voltage type (1.8 to 3.3 V).

### FEATURES


- Output Current: 1.5 A
- Output Voltage: 1.8 V, 2.5 V, 3.3 V (Fixed type) / 1.8 to 3.3 V (Adjustable type)
- Output Voltage Tolerance:  $V_o \pm 2.0\%$  ( $T_J = 25^\circ\text{C}$ )
- Dropout Voltage:  $V_{DIF} = 1.0\text{ V MAX.}$  ( $I_o = 1.5\text{ A}$ )
- Quiescent Current:  $150\text{ }\mu\text{A TYP.}$  ( $I_o = 0\text{ A}$ )
- Standby Current:  $1\text{ }\mu\text{A}$
- Available for laminated ceramic capacitor: (Electric capacity  $10\text{ }\mu\text{F}$  or higher)
- On-chip over-current protection circuit
- On-chip thermal shut down circuit

### APPLICATIONS

These regulators are suitable for large-scale ASICs which are used in digital appliances etc.

### PIN CONFIGURATION (Marking Side)



5-PIN TO-252 (5-PIN MP-3ZK)

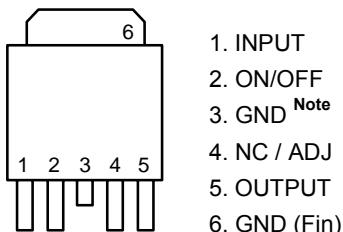

**Note** No.3 pin is cut and can not be connected to substrate. No.6 is Fin and common to GND pin.

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.  
Not all products and/or types are available in every country. Please check with an NEC Electronics sales representative for availability and additional information.

## BLOCK DIAGRAM

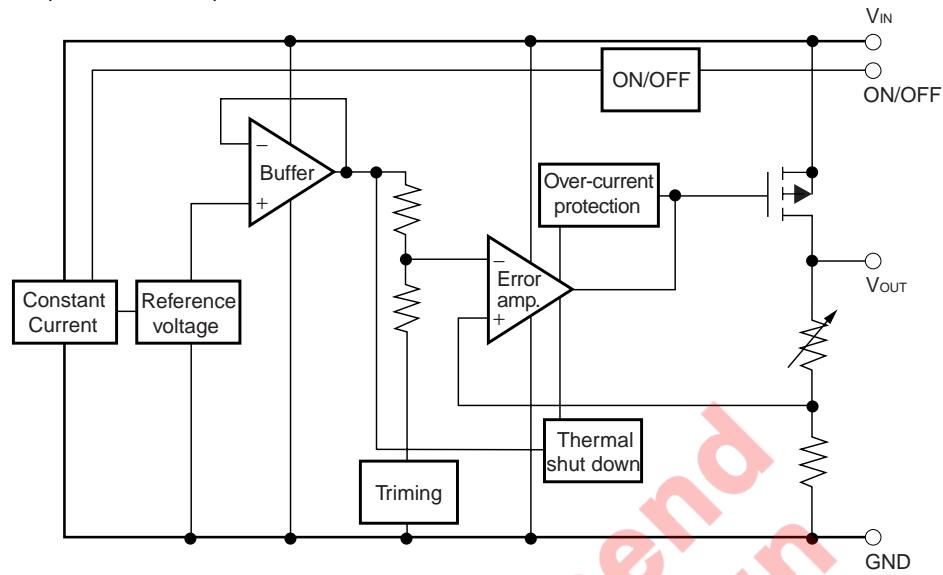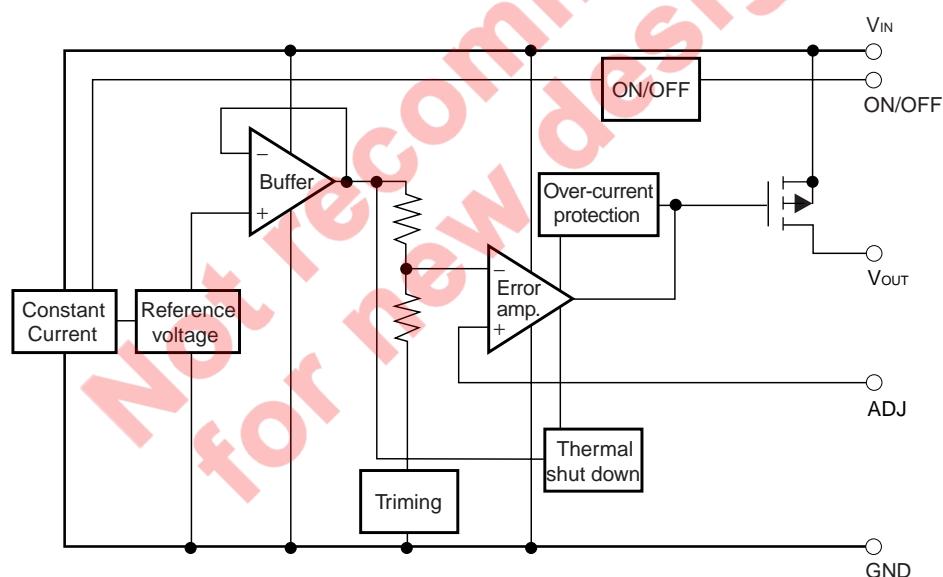 $\mu$ PD121W18A,  $\mu$ PD121W25A,  $\mu$ PD121W33A $\mu$ PD121W00A

## ORDERING INFORMATION

Part Number	Package	Output Voltage	Type	Marking
μPD121W18AT1F	5-PIN TO-252 (5-PIN MP-3ZK)	1.8 V	Fixed	121W18
μPD121W25AT1F	5-PIN TO-252 (5-PIN MP-3ZK)	2.5 V	Fixed	121W25
μPD121W33AT1F	5-PIN TO-252 (5-PIN MP-3ZK)	3.3 V	Fixed	121W33
μPD121W00AT1F	5-PIN TO-252 (5-PIN MP-3ZK)	1.8 to 3.3 V	Adjustable	121W00

**Remark** Since it is the tape-packaged product, “-E1” or “-E2” is added to the end of its product name.

Part Number	Package	Package Type
μPD121W18AT1F-E1-AT <sup>Note</sup>	5-PIN TO-252 (5-PIN MP-3ZK)	<ul style="list-style-type: none"> <li>• 16 mm wide embossed taping</li> <li>• Pin 1 on draw-out side</li> <li>• 2,500 pcs/reel</li> </ul>
μPD121W18AT1F-E2-AT <sup>Note</sup>	5-PIN TO-252 (5-PIN MP-3ZK)	<ul style="list-style-type: none"> <li>• 16 mm wide embossed taping</li> <li>• Pin 1 at take-up side</li> <li>• 2,500 pcs/reel</li> </ul>
μPD121W25AT1F-E1-AT <sup>Note</sup>	5-PIN TO-252 (5-PIN MP-3ZK)	<ul style="list-style-type: none"> <li>• 16 mm wide embossed taping</li> <li>• Pin 1 on draw-out side</li> <li>• 2,500 pcs/reel</li> </ul>
μPD121W25AT1F-E2-AT <sup>Note</sup>	5-PIN TO-252 (5-PIN MP-3ZK)	<ul style="list-style-type: none"> <li>• 16 mm wide embossed taping</li> <li>• Pin 1 at take-up side</li> <li>• 2,500 pcs/reel</li> </ul>
μPD121W33AT1F-E1-AT <sup>Note</sup>	5-PIN TO-252 (5-PIN MP-3ZK)	<ul style="list-style-type: none"> <li>• 16 mm wide embossed taping</li> <li>• Pin 1 on draw-out side</li> <li>• 2,500 pcs/reel</li> </ul>
μPD121W33AT1F-E2-AT <sup>Note</sup>	5-PIN TO-252 (5-PIN MP-3ZK)	<ul style="list-style-type: none"> <li>• 16 mm wide embossed taping</li> <li>• Pin 1 at take-up side</li> <li>• 2,500 pcs/reel</li> </ul>
μPD121W00AT1F-E1-AT <sup>Note</sup>	5-PIN TO-252 (5-PIN MP-3ZK)	<ul style="list-style-type: none"> <li>• 16 mm wide embossed taping</li> <li>• Pin 1 on draw-out side</li> <li>• 2,500 pcs/reel</li> </ul>
μPD121W00AT1F-E2-AT <sup>Note</sup>	5-PIN TO-252 (5-PIN MP-3ZK)	<ul style="list-style-type: none"> <li>• 16 mm wide embossed taping</li> <li>• Pin 1 at take-up side</li> <li>• 2,500 pcs/reel</li> </ul>

**Note** Pb-free (This product does not contain Pb in the external electrode and other parts.)

ABSOLUTE MAXIMUM RATINGS ( $T_A = 25^\circ\text{C}$ , unless otherwise specified)


Parameter	Symbol	Rating	Unit
Input Voltage	$V_{IN}$	-0.3 to +6.0	V
ON/OFF Pin Voltage	$V_{ON/OFF}$	-0.3 to $V_{IN}$	V
Internal Power Dissipation ( $T_c = 25^\circ\text{C}$ ) <small>Note</small>	$P_T$	10	W
Operating Ambient Temperature	$T_A$	-40 to +85	$^\circ\text{C}$
Operating Junction Temperature	$T_J$	-40 to +150	$^\circ\text{C}$
Storage Temperature	$T_{STG}$	-55 to +150	$^\circ\text{C}$
Thermal Resistance (junction to ambient)	$R_{th(J-A)}$	125	$^\circ\text{C}/\text{W}$
Thermal Resistance (junction to case)	$R_{th(J-C)}$	12.5	$^\circ\text{C}/\text{W}$

**Note** Internally limited. When the operating junction temperature rises above  $150^\circ\text{C}$ , the internal circuit shuts down the output voltage.


**Caution** Product quality may suffer if the absolute maximum rating is exceeded even momentarily for any parameter. That is, the absolute maximum ratings are rated values at which the product is on the verge of suffering physical damage, and therefore the product must be used under conditions that ensure that the absolute maximum ratings are not exceeded.

## TYPICAL CONNECTION

$\mu$ PD121W18A,  $\mu$ PD121W25A,  $\mu$ PD121W33A

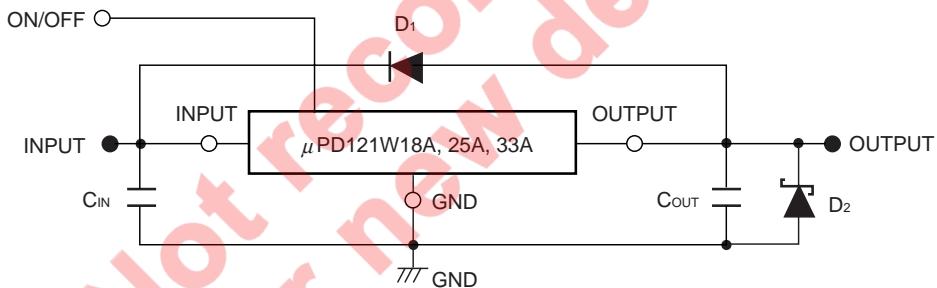

$\mu$ PD121W00A

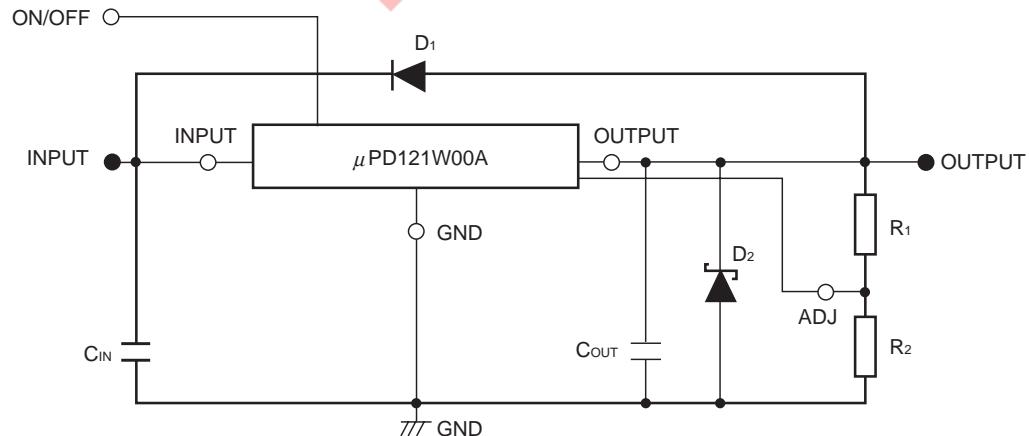

$C_{IN}$  : 0.1  $\mu$ F or higher. Be sure to connect  $C_{IN}$  to prevent parasitic oscillation. Set this value according to the length of the line between the regulator and the INPUT pin. Use of a film capacitor or other capacitor with first-rate voltage and temperature characteristics is recommended. If using a laminated ceramic capacitor, it is necessary to ensure that  $C_{IN}$  is 0.1  $\mu$ F or higher for the voltage and temperature range to be used.

$C_{OUT}$  : 10  $\mu$ F or higher. Be sure to connect  $C_{OUT}$  to prevent oscillation and improve excessive load regulation. Place  $C_{IN}$  and  $C_{OUT}$  as close as possible to the IC pins (within 1 to 2 cm). Also, in case of using a laminated ceramic capacitor, please note following items.

- It is necessary to ensure that  $C_{OUT}$  is 10  $\mu$ F or higher for the voltage and temperature range to be used.
- In case of using laminated ceramic capacitor, it is easy to become state of parasitic oscillation. Because ESR of laminated ceramic capacitor is very low. Therefore, the capacitor and load condition (output current) which fulfill the condition of the stable operation area of ESR shown below are recommended.
- Stable Operation Area as below is regulated under condition of which this product is not on a substrate. Therefore impedance on substrate is not considered.

$D_1$  : If the OUTPUT pin has a higher voltage than the INPUT pin, connect a diode.

$D_2$  : If the OUTPUT pin has a lower voltage than the GND pin, connect a Schottky barrier diode.


$R_1, R_2$ : The total amount of  $R_1$  and  $R_2$  is sure to below 500 k $\Omega$  (375 k $\Omega$  TYP.).  $R_2 = 100$  k $\Omega$  is recommended.

$$V_{OUT} = (1 + R_1/R_2) V_{ADJ}$$

**Note** When  $V_{OUT} = 3.0$  V:  $R_1 = 275$  k $\Omega$ ,  $R_2 = 100$  k $\Omega$

**Caution** Make sure that no external voltage is applied to the OUTPUT pin.

$\mu$ PD121WxxA Series  $C_{OUT}$  ESR Stable Operation Area

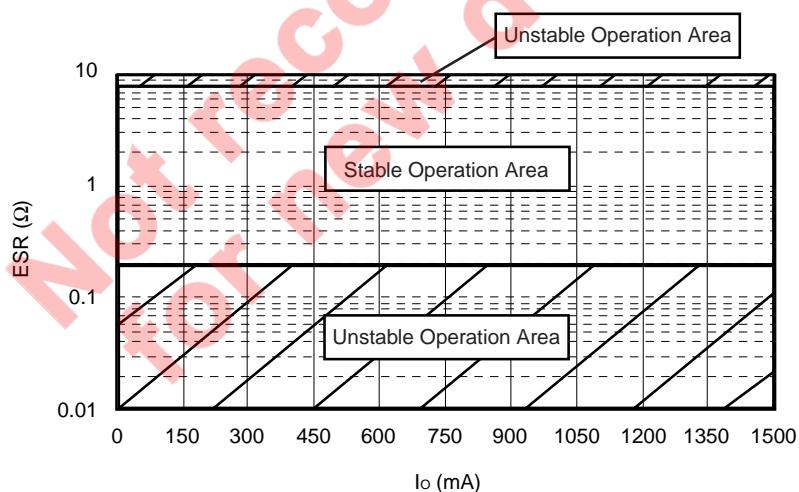

## RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Type Number	MIN.	TYP.	MAX.	Unit
Input Voltage	V <sub>IN</sub>	$\mu$ PD121W18A	2.8		5.5	V
		$\mu$ PD121W25A	3.5		5.5	V
		$\mu$ PD121W33A	4.3		5.5	V
		$\mu$ PD121W00A	V <sub>O</sub> + 1		5.5	V
Output Voltage	V <sub>O</sub>	$\mu$ PD121W00A	1.8		3.3	V
ON/OFF Pin Voltage	V <sub>ON/OFF</sub>	All	0		V <sub>IN</sub>	V
Output Current	I <sub>O</sub>	All	0		1.5	A
Operating Ambient Temperature	T <sub>A</sub>	All	-40		+85	°C
Operating Junction Temperature	T <sub>J</sub>	All	-40		+125	°C

**Caution1.** Turn on V<sub>IN</sub> and V<sub>ON/OFF</sub> at the same time, or turn on V<sub>IN</sub> first and then V<sub>ON/OFF</sub>.

Turn off V<sub>IN</sub> and V<sub>ON/OFF</sub> at the same time, or turn off V<sub>ON/OFF</sub> first and then V<sub>IN</sub>.

- If absolute maximum rating is not exceeded, you can used this product above the recommended operating range. However, since a margin with absolute maximum rating decreases, please use this product after sufficient evaluation.

## ELECTRICAL CHARACTERISTICS

 $\mu$ PD121W18A

(T<sub>J</sub> = 25°C, V<sub>IN</sub> = V<sub>ON/OFF</sub> = 2.8 V, I<sub>O</sub> = 1.0 A, C<sub>IN</sub> = 0.1  $\mu$ F, C<sub>OUT</sub> = 10  $\mu$ F, unless otherwise specified)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Output Voltage	V <sub>O1</sub>	—	1.764	1.8	1.836	V
	V <sub>O2</sub>	2.8 V $\leq$ V <sub>IN</sub> $\leq$ 5.5 V, 0 A $\leq$ I <sub>O</sub> $\leq$ 1.5 A	(1.746)	—	(1.854)	V
Line Regulation	REG <sub>IN</sub>	2.8 V $\leq$ V <sub>IN</sub> $\leq$ 5.5 V	—	1	18	mV
Load Regulation	REG <sub>L</sub>	0 A $\leq$ I <sub>O</sub> $\leq$ 1.5 A	—	1	18	mV
Quiescent Current	I <sub>BIAS1</sub>	I <sub>O</sub> = 0 A	—	150	300	$\mu$ A
	I <sub>BIAS2</sub>	I <sub>O</sub> = 1.5 A	—	(2500)	(5000)	$\mu$ A
Quiescent Current Change	$\Delta$ I <sub>BIAS1</sub>	2.8 V $\leq$ V <sub>IN</sub> $\leq$ 5.5 V	—	(100)	(300)	$\mu$ A
	$\Delta$ I <sub>BIAS2</sub>	0 A $\leq$ I <sub>O</sub> $\leq$ 1.5 A	—	(2350)	(5000)	$\mu$ A
Output Noise Voltage	V <sub>n</sub>	10 Hz $\leq$ f $\leq$ 100 kHz	—	160	—	$\mu$ V <sub>r.m.s.</sub>
Ripple Rejection	R • R	f = 1 kHz, 2.8 V $\leq$ V <sub>IN</sub> $\leq$ 3.8 V	—	65	—	dB
Dropout Voltage	V <sub>DIF</sub>	I <sub>O</sub> = 1.5 A	—	0.6	1.0	V
Short Circuit Current	I <sub>Oshort</sub>	—	—	1.0	—	A
Peak Output Current	I <sub>Opeak</sub>	—	1.5	—	—	A
Temperature Coefficient of Output Voltage	$\Delta$ V <sub>O/<math>\Delta</math>T</sub>	I <sub>O</sub> = 5 mA, 0°C $\leq$ T <sub>J</sub> $\leq$ 125°C	—	0.01	—	mV/°C
ON-state Voltage	V <sub>ON</sub>	I <sub>O</sub> = 0 A	1.5	—	V <sub>IN</sub>	V
OFF-state Voltage	V <sub>OFF</sub>	I <sub>O</sub> = 0 A	—	—	0.5	V
ON-state ON/OFF Pin Current	I <sub>ON</sub>	I <sub>O</sub> = 0 A	—	—	2	$\mu$ A
Standby Current	I <sub>BIAS(OFF)</sub>	V <sub>ON/OFF</sub> = 0 V	—	—	1	$\mu$ A

**Remark** Values in parentheses are product design values, and are thus provided as reference values.

$\mu$ PD121W25A(T<sub>J</sub> = 25°C, V<sub>IN</sub> = V<sub>ON/OFF</sub> = 3.5 V, I<sub>O</sub> = 1.0 A, C<sub>IN</sub> = 0.1  $\mu$ F, C<sub>OUT</sub> = 10  $\mu$ F, unless otherwise specified)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Output Voltage	V <sub>O1</sub>	—	2.45	2.5	2.55	V
	V <sub>O2</sub>	3.5 V $\leq$ V <sub>IN</sub> $\leq$ 5.5 V, 0 A $\leq$ I <sub>O</sub> $\leq$ 1.5 A	(2.425)	—	(2.575)	V
Line Regulation	REG <sub>IN</sub>	3.5 V $\leq$ V <sub>IN</sub> $\leq$ 5.5 V	—	1	25	mV
Load Regulation	REG <sub>L</sub>	0 A $\leq$ I <sub>O</sub> $\leq$ 1.5 A	—	1	25	mV
Quiescent Current	I <sub>BIAS1</sub>	I <sub>O</sub> = 0 A	—	150	300	$\mu$ A
	I <sub>BIAS2</sub>	I <sub>O</sub> = 1.5 A	—	(2500)	(5000)	$\mu$ A
Quiescent Current Change	$\Delta$ I <sub>BIAS1</sub>	3.5 V $\leq$ V <sub>IN</sub> $\leq$ 5.5 V	—	(100)	(300)	$\mu$ A
	$\Delta$ I <sub>BIAS2</sub>	0 A $\leq$ I <sub>O</sub> $\leq$ 1.5 A	—	(2350)	(5000)	$\mu$ A
Output Noise Voltage	V <sub>N</sub>	10 Hz $\leq$ f $\leq$ 100 kHz	—	230	—	$\mu$ V <sub>r.m.s.</sub>
Ripple Rejection	R • R	f = 1 kHz, 3.5 V $\leq$ V <sub>IN</sub> $\leq$ 4.5 V	—	60	—	dB
Dropout Voltage	V <sub>DIF</sub>	I <sub>O</sub> = 1.5 A	—	0.7	1.0	V
Short Circuit Current	I <sub>Oshort</sub>	—	—	1.0	—	A
Peak Output Current	I <sub>Opeak</sub>	—	1.5	—	—	A
Temperature Coefficient of Output Voltage	$\Delta$ V <sub>O/<math>\Delta</math>T</sub>	I <sub>O</sub> = 5 mA, 0°C $\leq$ T <sub>J</sub> $\leq$ 125°C	—	-0.07	—	mV/°C
ON-state Voltage	V <sub>ON</sub>	I <sub>O</sub> = 0 A	1.5	—	V <sub>IN</sub>	V
OFF-state Voltage	V <sub>OFF</sub>	I <sub>O</sub> = 0 A	—	—	0.5	V
ON-state ON/OFF Pin Current	I <sub>ON</sub>	I <sub>O</sub> = 0 A	—	—	2	$\mu$ A
Standby Current	I <sub>BIAS(OFF)</sub>	V <sub>ON/OFF</sub> = 0 V	—	—	1	$\mu$ A

**Remark** Values in parentheses are product design values, and are thus provided as reference values.

$\mu$ PD121W33A(T<sub>J</sub> = 25°C, V<sub>IN</sub> = V<sub>ON/OFF</sub> = 5.0 V, I<sub>O</sub> = 1.0 A, C<sub>IN</sub> = 0.1  $\mu$ F, C<sub>OUT</sub> = 10  $\mu$ F, unless otherwise specified)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Output Voltage	V <sub>O1</sub>	—	3.234	3.3	3.366	V
	V <sub>O2</sub>	4.3 V $\leq$ V <sub>IN</sub> $\leq$ 5.5 V, 0 A $\leq$ I <sub>O</sub> $\leq$ 1.5 A	(3.201)	—	(3.399)	V
Line Regulation	REG <sub>IN</sub>	4.3 V $\leq$ V <sub>IN</sub> $\leq$ 5.5 V	—	1	33	mV
Load Regulation	REG <sub>L</sub>	0 A $\leq$ I <sub>O</sub> $\leq$ 1.5 A	—	1	33	mV
Quiescent Current	I <sub>BIAS1</sub>	I <sub>O</sub> = 0 A	—	150	300	$\mu$ A
	I <sub>BIAS2</sub>	I <sub>O</sub> = 1.5 A	—	(2500)	(5000)	$\mu$ A
Quiescent Current Change	$\Delta$ I <sub>BIAS1</sub>	4.3 V $\leq$ V <sub>IN</sub> $\leq$ 5.5 V	—	(100)	(300)	$\mu$ A
	$\Delta$ I <sub>BIAS2</sub>	0 A $\leq$ I <sub>O</sub> $\leq$ 1.5 A	—	(2350)	(5000)	$\mu$ A
Output Noise Voltage	V <sub>n</sub>	10 Hz $\leq$ f $\leq$ 100 kHz	—	340	—	$\mu$ V <sub>r.m.s.</sub>
Ripple Rejection	R • R	f = 1 kHz, 4.3 V $\leq$ V <sub>IN</sub> $\leq$ 5.3 V	—	60	—	dB
Dropout Voltage	V <sub>DIF</sub>	I <sub>O</sub> = 1.5 A	—	0.6	1.0	V
Short Circuit Current	I <sub>Oshort</sub>	—	—	1.0	—	A
Peak Output Current	I <sub>Opeak</sub>	—	1.5	—	—	A
Temperature Coefficient of Output Voltage	$\Delta$ V <sub>O/<math>\Delta</math>T</sub>	I <sub>O</sub> = 5 mA, 0°C $\leq$ T <sub>J</sub> $\leq$ 125°C	—	-0.1	—	mV/°C
ON-state Voltage	V <sub>ON</sub>	I <sub>O</sub> = 0 A	1.5	—	V <sub>IN</sub>	V
OFF-state Voltage	V <sub>OFF</sub>	I <sub>O</sub> = 0 A	—	—	0.5	V
ON-state ON/OFF Pin Current	I <sub>ON</sub>	I <sub>O</sub> = 0 A	—	—	2	$\mu$ A
Standby Current	I <sub>BIAS(OFF)</sub>	V <sub>ON/OFF</sub> = 0 V	—	—	1	$\mu$ A







**Remark** Values in parentheses are product design values, and are thus provided as reference values.







$\mu$ PD121W00A(T<sub>J</sub> = 25°C, V<sub>IN</sub> = V<sub>ON/OFF</sub> = 5.0 V, I<sub>O</sub> = 1.0 A, V<sub>O</sub> = 3.0 V, C<sub>IN</sub> = 0.1  $\mu$ F, C<sub>OUT</sub> = 10  $\mu$ F, unless otherwise specified)




Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Reference Voltage	V <sub>ADJ1</sub>	—	-2% <small>Note</small>	0.8	+2% <small>Note</small>	V
	V <sub>ADJ2</sub>	2.8 V $\leq$ V <sub>IN</sub> $\leq$ 5.5 V, 0 A $\leq$ I <sub>O</sub> $\leq$ 1.5 A	(-3%) <small>Note</small>	—	(+3%) <small>Note</small>	V
Line Regulation	REG <sub>IN</sub>	V <sub>O</sub> + 1 V $\leq$ V <sub>IN</sub> $\leq$ 5.5 V	—	1	1% <small>Note</small>	mV
Load Regulation	REG <sub>L</sub>	0 A $\leq$ I <sub>O</sub> $\leq$ 1.5 A	—	1	1% <small>Note</small>	mV
Quiescent Current	I <sub>BIAS1</sub>	I <sub>O</sub> = 0 A	—	150	300	$\mu$ A
	I <sub>BIAS2</sub>	I <sub>O</sub> = 1.5 A	—	(2500)	(5000)	$\mu$ A
Quiescent Current Change	$\Delta$ I <sub>BIAS1</sub>	V <sub>O</sub> + 1 V $\leq$ V <sub>IN</sub> $\leq$ 5.5 V	—	(100)	(300)	$\mu$ A
	$\Delta$ I <sub>BIAS2</sub>	0 A $\leq$ I <sub>O</sub> $\leq$ 1.5 A	—	(2350)	(5000)	$\mu$ A
Output Noise Voltage	V <sub>N</sub>	10 Hz $\leq$ f $\leq$ 100 kHz	—	220	—	$\mu$ V <sub>r.m.s.</sub>
Ripple Rejection	R • R	f = 1 kHz, V <sub>O</sub> + 1 V $\leq$ V <sub>IN</sub> $\leq$ V <sub>O</sub> + 2 V	—	70	—	dB
Dropout Voltage	V <sub>DIF</sub>	I <sub>O</sub> = 1.5 A	—	0.6	1.0	V
Short Circuit Current	I <sub>Oshort</sub>	—	—	1.0	—	A
Peak Output Current	I <sub>Opeak</sub>	—	1.5	—	—	A
Temperature Coefficient of Output Voltage	$\Delta$ V <sub>O/<math>\Delta</math>T</sub>	I <sub>O</sub> = 5 mA, 0°C $\leq$ T <sub>J</sub> $\leq$ 125°C	—	-0.12	—	mV/°C
ON-state Voltage	V <sub>ON</sub>	I <sub>O</sub> = 0 A	1.5	—	V <sub>IN</sub>	V
OFF-state Voltage	V <sub>OFF</sub>	I <sub>O</sub> = 0 A	—	—	0.5	V
ON-state ON/OFF Pin Current	I <sub>ON</sub>	I <sub>O</sub> = 0 A	—	—	2	$\mu$ A
Standby Current	I <sub>BIAS(OFF)</sub>	V <sub>ON/OFF</sub> = 0 V	—	—	1	$\mu$ A

**Note** This is the percentage to the output voltage (V<sub>O</sub>: the unit is V).**Remark** Values in parentheses are product design values, and are thus provided as reference values.

## TYPICAL CHARACTERISTICS

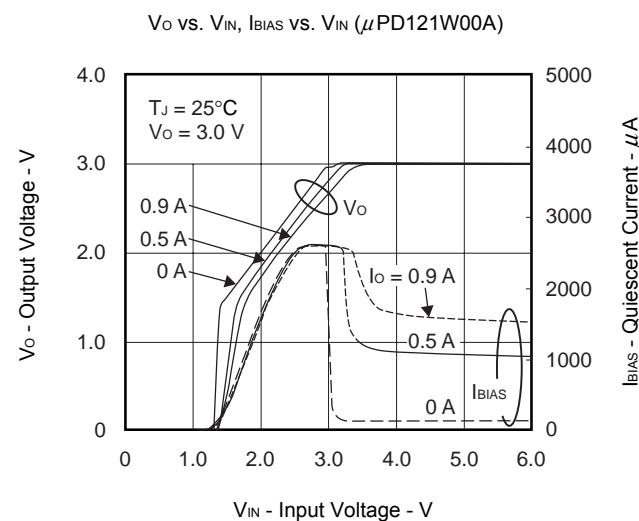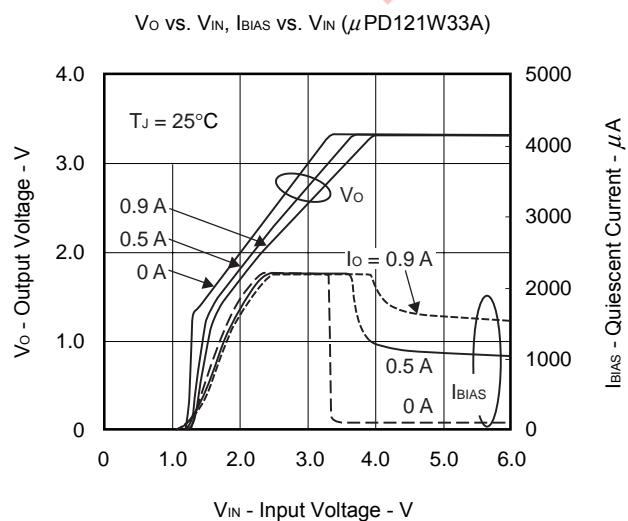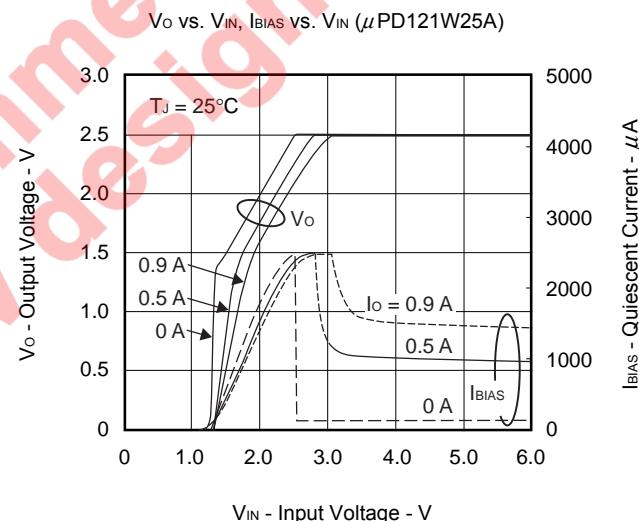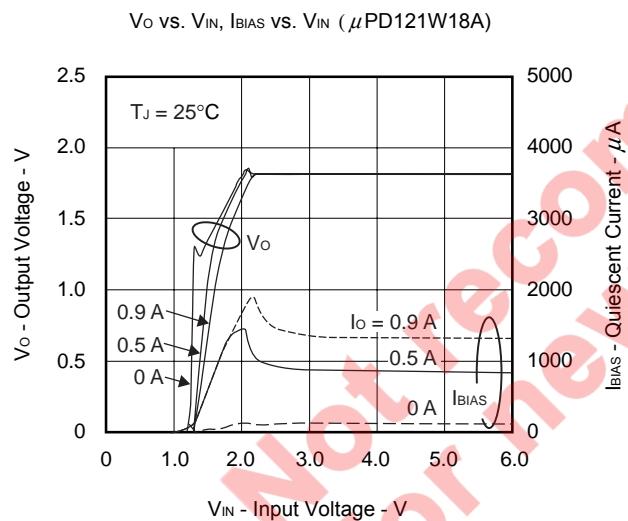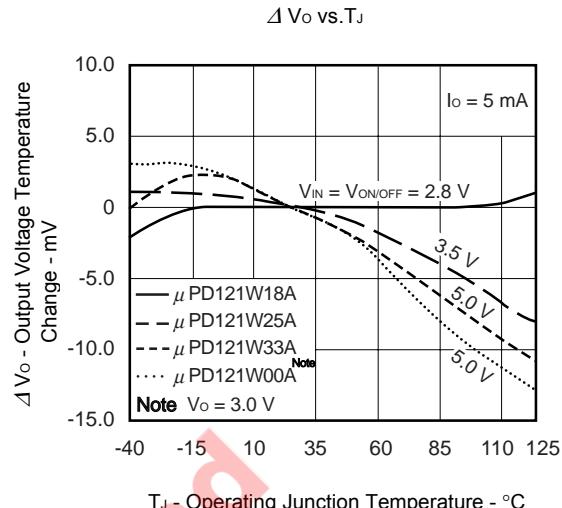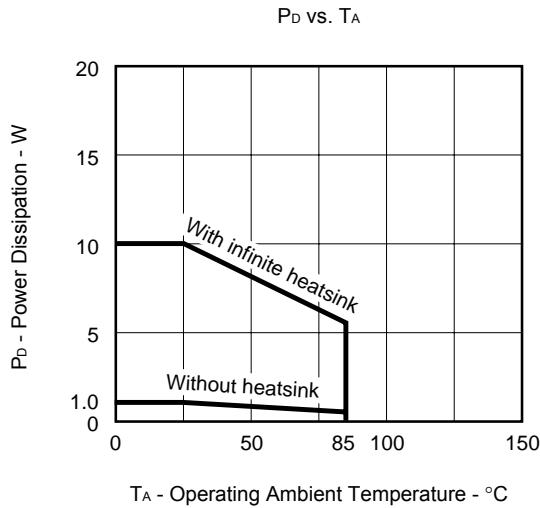


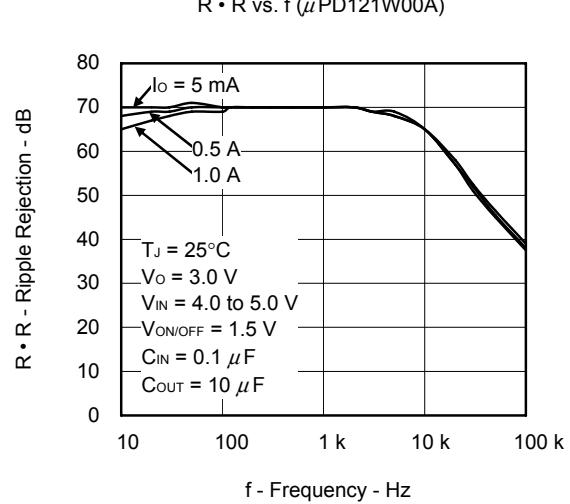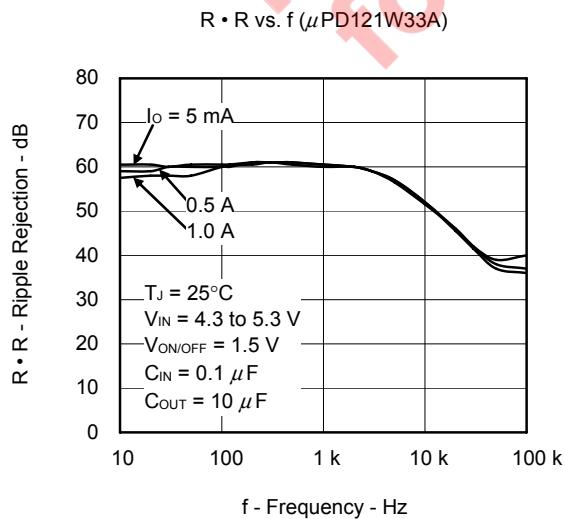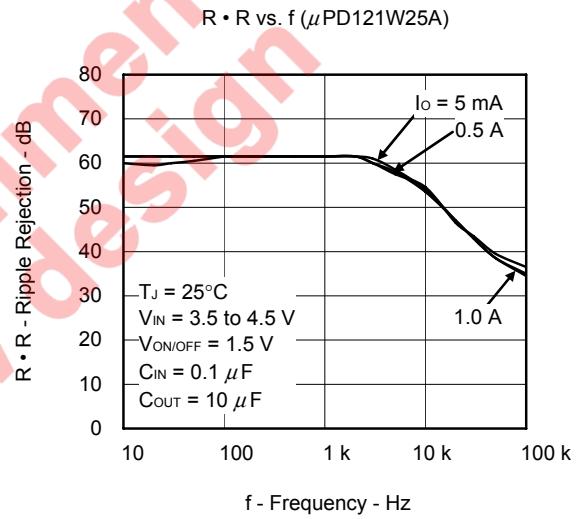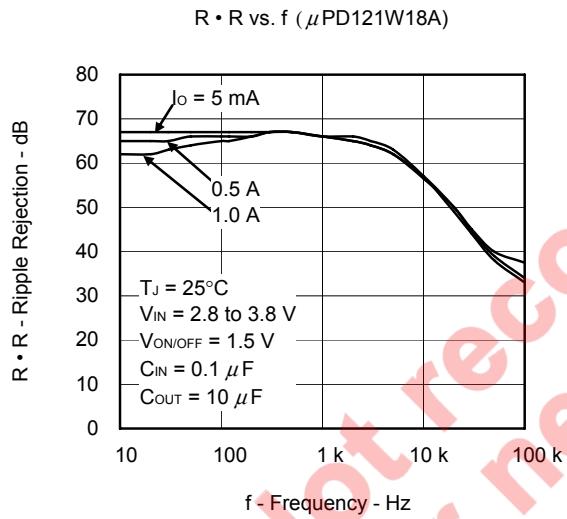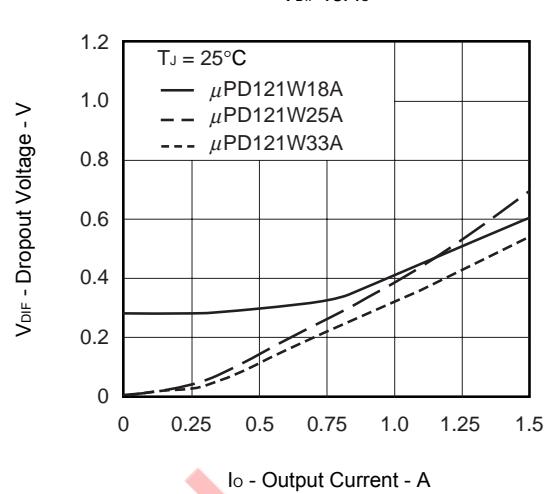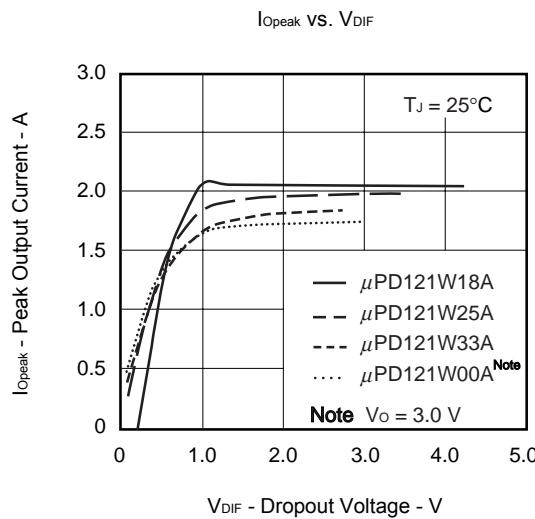

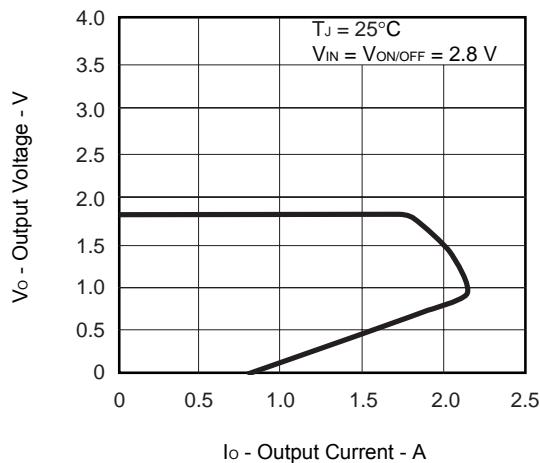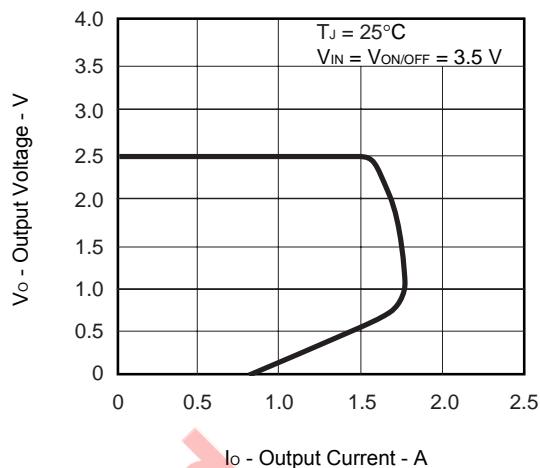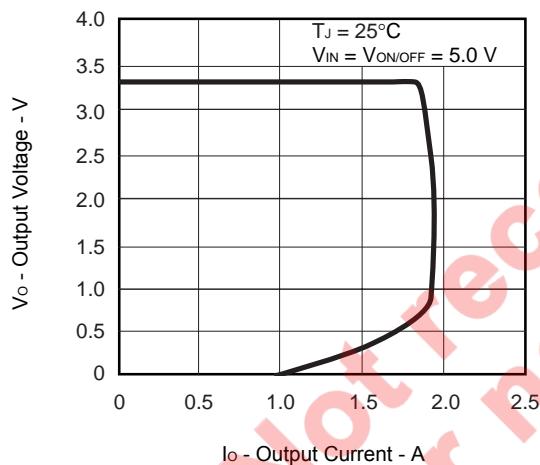Vo vs. Io ( $\mu$ PD121W18A)Vo vs. Io ( $\mu$ PD121W25A)Vo vs. Io ( $\mu$ PD121W33A)

## PACKAGE DRAWING (Unit: mm)

## 5-PIN TO-252 (MP-3ZK)

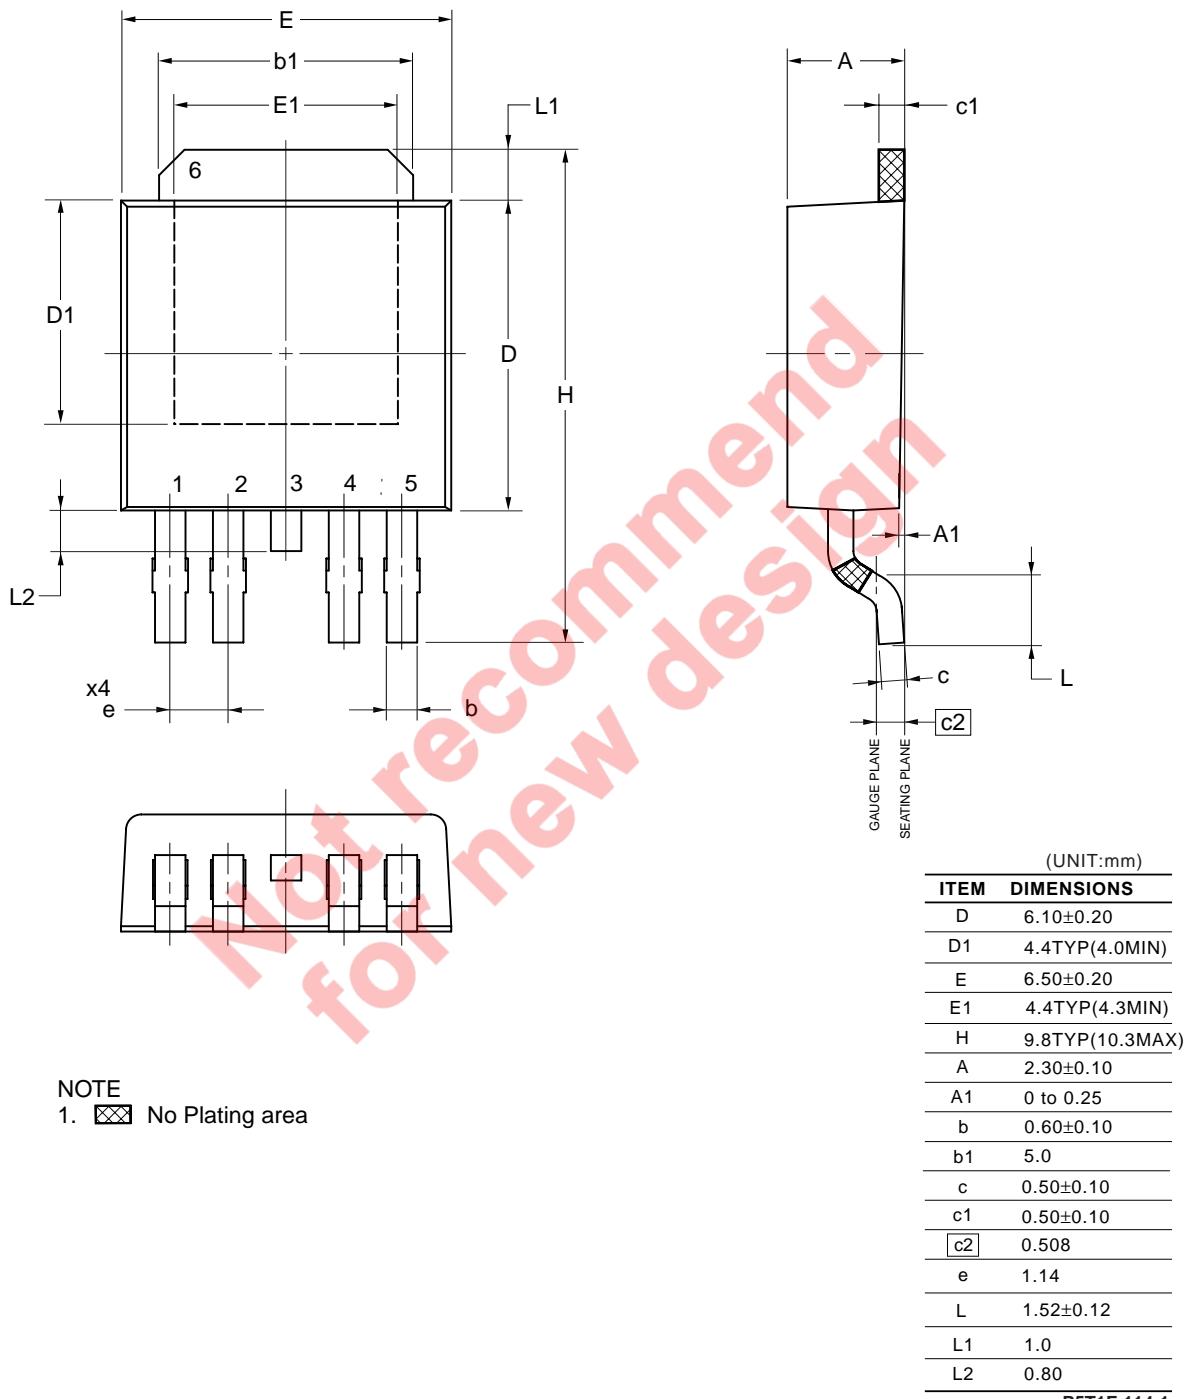

P5T1F-114-1

© NEC Electronics Corporation 2006

## RECOMMENDED MOUNTING CONDITIONS

The μPD121WxxA Series should be soldered and mounted under the following recommended conditions.

For soldering methods and conditions other than those recommended below, contact an NEC Electronics sales representative.

For technical information, see the following website.

**Semiconductor Device Mount Manual (<http://www.necel.com/pkg/en/mount/index.html>)**

μPD121W18AT1F-AT<sup>Note</sup>, μPD121W25AT1F-AT<sup>Note</sup>,  
μPD121W33AT1F-AT<sup>Note</sup>, μPD121W00AT1F-AT<sup>Note</sup>: 5-PIN TO-252 (5-PIN MP-3ZK)

Process	Conditions	Symbol
Infrared reflow	Package peak temperature: 260°C, Time: 60 seconds MAX. (at 220°C or higher), Count: Three times, Flux: Rosin flux with low chlorine (0.2 Wt% or below) recommended.	IR60-00-3
Partial Heating Method	Pin temperature: 350°C or below, Heat time: 3 seconds or less (per each side of the device).	P350

**Note** Pb-free (This product does not contain Pb in the external electrode and other parts.)

**Caution** Apply only one kind of soldering condition to a device, except for "partial heating method", or the device will be damaged by heat stress.

## REFERENCE DOCUMENTS

USER'S MANUAL	USAGE OF THREE TERMINAL REGULATORS	Document No.G12702E
INFORMATION	VOLTAGE REGULATOR OF SMD	Document No.G11872E
SEMICONDUCTOR	DEVICE MOUNT MANUAL	<a href="http://www.necel.com/pkg/en/mount/index.html">http://www.necel.com/pkg/en/mount/index.html</a>

**NOTES FOR CMOS DEVICES****① VOLTAGE APPLICATION WAVEFORM AT INPUT PIN**

Waveform distortion due to input noise or a reflected wave may cause malfunction. If the input of the CMOS device stays in the area between  $V_{IL}$  (MAX) and  $V_{IH}$  (MIN) due to noise, etc., the device may malfunction. Take care to prevent chattering noise from entering the device when the input level is fixed, and also in the transition period when the input level passes through the area between  $V_{IL}$  (MAX) and  $V_{IH}$  (MIN).

**② HANDLING OF UNUSED INPUT PINS**

Unconnected CMOS device inputs can be cause of malfunction. If an input pin is unconnected, it is possible that an internal input level may be generated due to noise, etc., causing malfunction. CMOS devices behave differently than Bipolar or NMOS devices. Input levels of CMOS devices must be fixed high or low by using pull-up or pull-down circuitry. Each unused pin should be connected to  $V_{DD}$  or GND via a resistor if there is a possibility that it will be an output pin. All handling related to unused pins must be judged separately for each device and according to related specifications governing the device.

**③ PRECAUTION AGAINST ESD**

A strong electric field, when exposed to a MOS device, can cause destruction of the gate oxide and ultimately degrade the device operation. Steps must be taken to stop generation of static electricity as much as possible, and quickly dissipate it when it has occurred. Environmental control must be adequate. When it is dry, a humidifier should be used. It is recommended to avoid using insulators that easily build up static electricity. Semiconductor devices must be stored and transported in an anti-static container, static shielding bag or conductive material. All test and measurement tools including work benches and floors should be grounded. The operator should be grounded using a wrist strap. Semiconductor devices must not be touched with bare hands. Similar precautions need to be taken for PW boards with mounted semiconductor devices.

**④ STATUS BEFORE INITIALIZATION**

Power-on does not necessarily define the initial status of a MOS device. Immediately after the power source is turned ON, devices with reset functions have not yet been initialized. Hence, power-on does not guarantee output pin levels, I/O settings or contents of registers. A device is not initialized until the reset signal is received. A reset operation must be executed immediately after power-on for devices with reset functions.

**⑤ POWER ON/OFF SEQUENCE**

In the case of a device that uses different power supplies for the internal operation and external interface, as a rule, switch on the external power supply after switching on the internal power supply. When switching the power supply off, as a rule, switch off the external power supply and then the internal power supply. Use of the reverse power on/off sequences may result in the application of an overvoltage to the internal elements of the device, causing malfunction and degradation of internal elements due to the passage of an abnormal current.

The correct power on/off sequence must be judged separately for each device and according to related specifications governing the device.

**⑥ INPUT OF SIGNAL DURING POWER OFF STATE**

Do not input signals or an I/O pull-up power supply while the device is not powered. The current injection that results from input of such a signal or I/O pull-up power supply may cause malfunction and the abnormal current that passes in the device at this time may cause degradation of internal elements. Input of signals during the power off state must be judged separately for each device and according to related specifications governing the device.

- The information in this document is current as of July, 2007. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC Electronics data sheets or data books, etc., for the most up-to-date specifications of NEC Electronics products. Not all products and/or types are available in every country. Please check with an NEC Electronics sales representative for availability and additional information.
- No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Electronics. NEC Electronics assumes no responsibility for any errors that may appear in this document.
- NEC Electronics does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC Electronics products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Electronics or others.
- Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of a customer's equipment shall be done under the full responsibility of the customer. NEC Electronics assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
- While NEC Electronics endeavors to enhance the quality, reliability and safety of NEC Electronics products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize risks of damage to property or injury (including death) to persons arising from defects in NEC Electronics products, customers must incorporate sufficient safety measures in their design, such as redundancy, fire-containment and anti-failure features.
- NEC Electronics products are classified into the following three quality grades: "Standard", "Special" and "Specific".

The "Specific" quality grade applies only to NEC Electronics products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of an NEC Electronics product depend on its quality grade, as indicated below. Customers must check the quality grade of each NEC Electronics product before using it in a particular application.

"Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots.

"Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support).

"Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.

The quality grade of NEC Electronics products is "Standard" unless otherwise expressly specified in NEC Electronics data sheets or data books, etc. If customers wish to use NEC Electronics products in applications not intended by NEC Electronics, they must contact an NEC Electronics sales representative in advance to determine NEC Electronics' willingness to support a given application.

(Note)

- (1) "NEC Electronics" as used in this statement means NEC Electronics Corporation and also includes its majority-owned subsidiaries.
- (2) "NEC Electronics products" means any product developed or manufactured by or for NEC Electronics (as defined above).