

A3G26D055N

Airfast RF Power GaN Transistor

Rev. 2 — March 2021

Data Sheet: Technical Data

This 8 W symmetrical Doherty RF power GaN transistor is designed for cellular base station applications requiring very wide instantaneous bandwidth capability covering the frequency range of 100 to 2690 MHz.

This part is characterized and performance is guaranteed for applications operating in the 100 to 2690 MHz band. There is no guarantee of performance when this part is used in applications designed outside of these frequencies.

2600 MHz

- Typical Doherty Single-Carrier W-CDMA Reference Circuit Performance: $V_{DD} = 48$ Vdc, $I_{DQA} = 40$ mA, $V_{GSB} = -4.9$ Vdc, $P_{out} = 8$ W Avg., Input Signal PAR = 9.9 dB @ 0.01% Probability on CCDF.⁽¹⁾

Frequency	G_{ps} (dB)	η_D (%)	Output PAR (dB)	ACPR (dBc)
2515 MHz	18.0	52.1	8.3	-27.4
2595 MHz	18.2	53.5	8.2	-28.2
2675 MHz	18.0	54.1	8.1	-30.1

1. All data measured in reference circuit with device soldered to printed circuit board.

700 MHz

- Typical Class AB Side A (top side) W-CDMA Reference Circuit Performance: $V_{DD} = 48$ Vdc, $I_{DQA} = 40$ mA, $P_{out} = 5.6$ W Avg., Input Signal PAR = 9.9 dB @ 0.01% Probability on CCDF.⁽¹⁾

Frequency	G_{ps} (dB)	η_D (%)	Output PAR (dB)	P_{3dB} (dBm)	ACPR (dBc)
750 MHz	20.0	41.7	7.0	44.5	-34.4
780 MHz	19.7	41.1	7.0	44.5	-34.3
810 MHz	19.2	40.6	7.0	44.5	-36.6

1. All data measured in reference circuit with device soldered to printed circuit board.

Features


- High terminal impedances for optimal broadband performance
- Improved linearized error vector magnitude with next generation signal
- Able to withstand extremely high output VSWR and broadband operating conditions
- Designed for low complexity analog or digital linearization systems
- Optimized for massive MIMO active antenna systems for 5G base stations

A3G26D055N

100–2690 MHz, 8 W Avg., 48 V
AIRFAST RF POWER GaN
TRANSISTOR



DFN 7 × 6.5
PLASTIC



Note: Exposed backside of the package is the source terminal for the transistor.

Figure 1. Pin Connections

Table 1. Maximum Ratings

Rating	Symbol	Value	Unit
Drain-Source Voltage	V_{DSS}	125	Vdc
Gate-Source Voltage	V_{GS}	-8, 0	Vdc
Operating Voltage	V_{DD}	55	Vdc
Maximum Forward Gate Current, I_G (A+B), @ $T_C = 25^\circ\text{C}$	I_{GMAX}	10	mA
Storage Temperature Range	T_{stg}	-65 to +150	°C
Case Operating Temperature Range	T_C	-55 to +150	°C
Maximum Channel Temperature	T_{CH}	225	°C

Table 2. Recommended Operating Conditions

Rating	Symbol	Value	Unit
Operating Voltage	V_{DD}	48	Vdc

Table 3. Thermal Characteristics

Characteristic	Symbol	Value	Unit
Thermal Resistance by Infrared Measurement, Active Die Surface-to-Case Case Temperature 123°C, $P_D = 8.3$ W	$R_{\theta JC}$ (IR)	3.7 (1)	°C/W
Thermal Resistance by Finite Element Analysis, Channel-to-Case Case Temperature 95°C, $P_D = 8.3$ W	$R_{\theta CHC}$ (FEA)	8.5 (2)	°C/W

Table 4. ESD Protection Characteristics

Test Methodology	Class
Human Body Model (per JS-001-2017)	1B
Charge Device Model (per JS-002-2014)	C3

Table 5. Moisture Sensitivity Level

Test Methodology	Rating	Package Peak Temperature	Unit
Per JESD22-A113, IPC/JEDEC J-STD-020	3	260	°C

Table 6. Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
Off Characteristics (3)					
Off-State Drain Leakage ($V_{DS} = 150$ Vdc, $V_{GS} = -8$ Vdc) ($V_{DS} = 150$ Vdc, $V_{GS} = -8$ Vdc)	$I_{D(BR)}$ Carrier Peaking	— —	— —	3.0 3.0	mAdc mAdc
On Characteristics — Side A, Carrier					
Gate Threshold Voltage ($V_{DS} = 10$ Vdc, $I_D = 3$ mAdc)	$V_{GS(th)}$	-3.5	-2.7	-2.3	Vdc
Gate Quiescent Voltage ($V_{DD} = 48$ Vdc, $I_{DA} = 40$ mAdc, Measured in Functional Test)	$V_{GSA(Q)}$	-2.8	-2.5	-2.3	Vdc
Gate-Source Leakage Current ($V_{DS} = 150$ Vdc, $V_{GS} = -12$ Vdc)	I_{GSS}	-3.0	—	—	mAdc
On Characteristics — Side B, Peaking					
Gate Threshold Voltage ($V_{DS} = 10$ Vdc, $I_D = 3$ mAdc)	$V_{GS(th)}$	-3.5	-2.7	-2.3	Vdc
Gate-Source Leakage Current ($V_{DS} = 150$ Vdc, $V_{GS} = -12$ Vdc)	I_{GSS}	-3.0	—	—	mAdc

1. Refer to AN1955, *Thermal Measurement Methodology of RF Power Amplifiers*. Go to <http://www.nxp.com/RF> and search for AN1955.
2. $R_{\theta CHC}$ (FEA) must be used for purposes related to reliability and limitations on maximum channel temperature. MTTF may be estimated by the expression MTTF (hours) = $10^{[A + B/(T + 273)]}$, where T is the channel temperature in degrees Celsius, $A = -11.1$ and $B = 8366$.
3. Each side of device measured separately.

(continued)

Table 6. Electrical Characteristics (T_A = 25°C unless otherwise noted) (continued)

Characteristic	Symbol	Min	Typ	Max	Unit
Functional Tests (1) (In NXP Doherty Production Test Fixture, 50 ohm system) V _{DD} = 48 Vdc, I _{DQA} = 40 mA, V _{GSA} = -5 Vdc, P _{out} = 5 W Avg., f = 2500 MHz, 1-tone CW. [See note on correct biasing sequence.]					
Power Gain	G _{ps}	11.5	13.9	17.0	dB
Drain Efficiency	η _D	32.0	36.2	—	%
P _{out} @ 6 dB Compression Point, CW	P _{6dB}	37.5	40.0	—	dBm
Wideband Ruggedness (In NXP Doherty Reference Circuit, 50 ohm system) I _{DQA} = 40 mA, V _{GSA} = -5 Vdc, f = 2595 MHz, Additive White Gaussian Noise (AWGN) with 10 dB PAR					
ISBW of 400 MHz at 55 Vdc, 17.4 W Avg. Modulated Output Power (3 dB Input Overdrive from 7.6 W Avg. Modulated Output Power)	No Device Degradation				
Typical Performance (2) (In NXP Doherty Reference Circuit, 50 ohm system) V _{DD} = 48 Vdc, I _{DQA} = 40 mA, V _{GSA} = -5 Vdc, 2515–2675 MHz Bandwidth					
VBW Resonance Point (IMD Third Order Intermodulation Inflection Point)	V _{BW_{res}}	—	200	—	MHz
Gain Flatness in 160 MHz Bandwidth @ P _{out} = 8 W Avg.	G _F	—	0.8	—	dB
Fast CW, 27 ms Sweep					
P _{out} @ 3 dB Compression Point	P _{3dB}	—	55	—	W
AM/PM (Maximum value measured at the P _{3dB} compression point across the 2515–2675 MHz bandwidth)	Φ	—	-2.5	—	°
Gain Variation over Temperature (-40°C to +85°C)	ΔG	—	0.013	—	dB/°C
Output Power Variation over Temperature (-40°C to +85°C)	ΔP _{3dB}	—	0.010	—	dB/°C

Table 7. Ordering Information

Device	Tape and Reel Information	Package
A3G26D055NT4	T4 Suffix = 2,500 Units, 16 mm Tape Width, 13-inch Reel	DFN 7 × 6.5

1. Part internally input matched.
2. All data measured in reference circuit with device soldered to printed circuit board.

NOTE: Correct Biasing Sequence for GaN Depletion Mode Transistors in a Doherty Configuration


Bias ON the device

1. Set gate voltage V_{GSA} and V_{GSB} to -5 V.
2. Set drain voltage V_{DSA} and V_{DSB} to nominal supply voltage (+48 V).
3. Increase V_{GSA} (carrier side) until I_{DQA} current is attained.
4. Increase V_{GSB} (peaking side) to target bias voltage.
5. Apply RF input power to desired level.

Bias OFF the device


1. Disable RF input power.
2. Adjust gate voltage V_{GSA} and V_{GSB} to -5 V.
3. Adjust drain voltage V_{DSA} and V_{DSB} to 0 V. Allow adequate time for drain voltage to reduce to 0 V from external drain capacitors.
4. Disable V_{GSA} and V_{GSB}.

Package Information

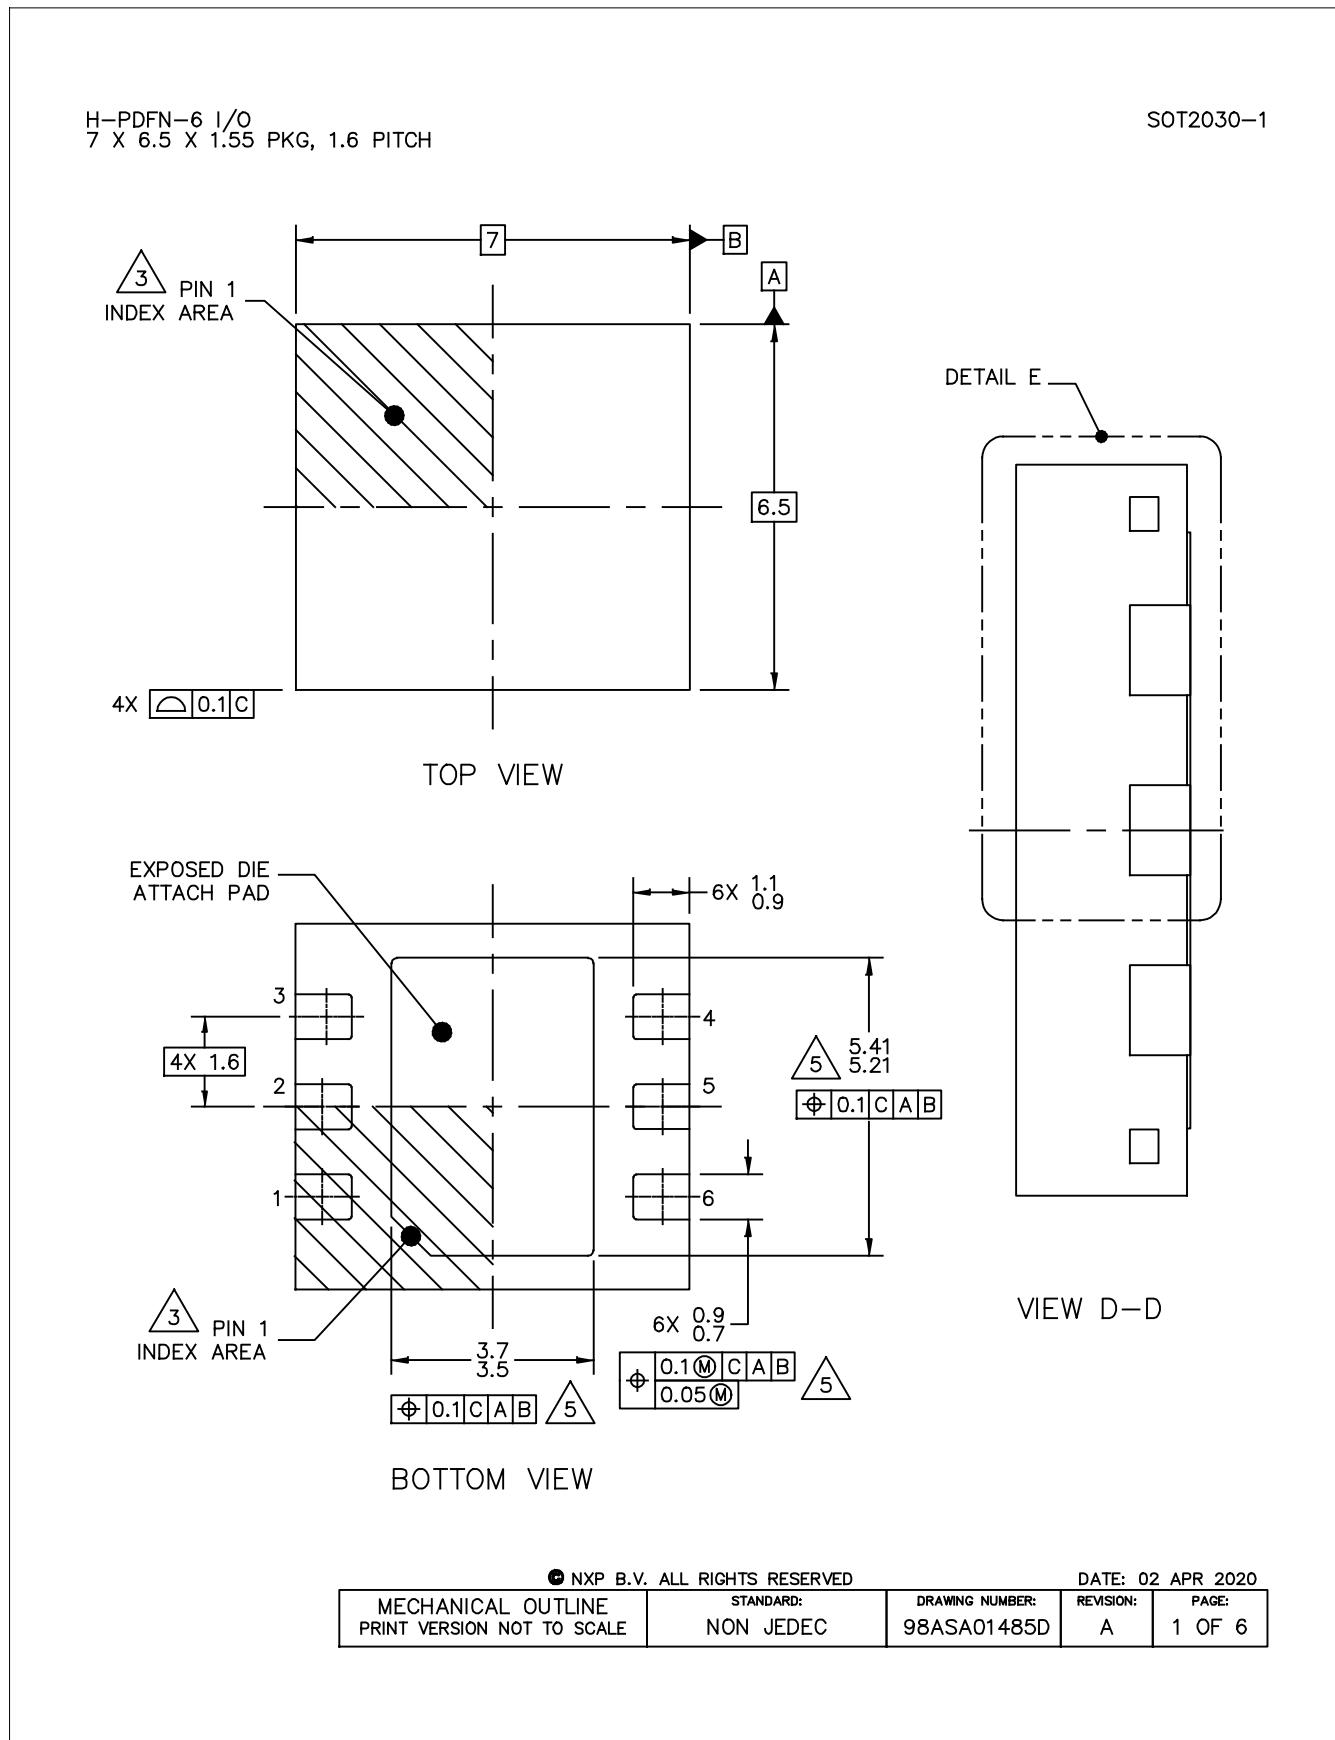

H-PDFN-6 I/O
7 X 6.5 X 1.55 PKG, 1.6 PITCH

SOT2030-1

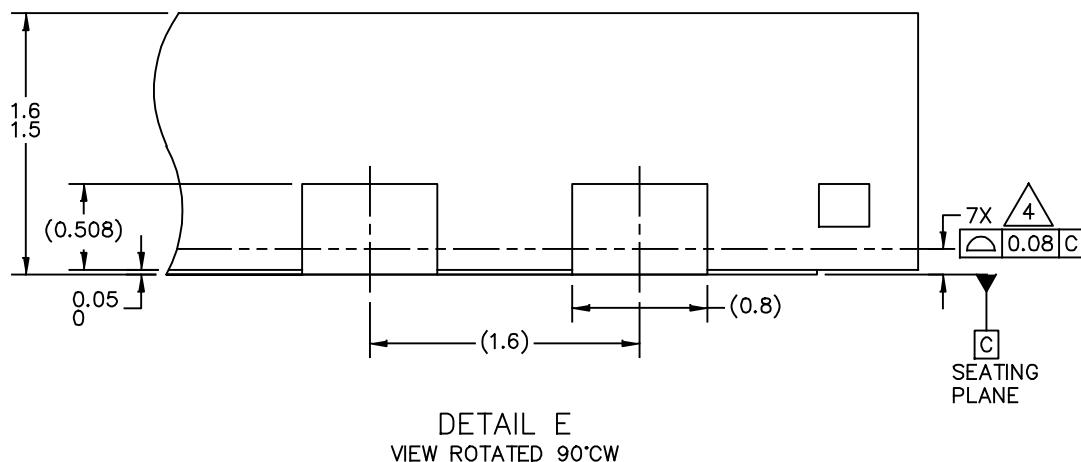


© NXP B.V. ALL RIGHTS RESERVED

DATE: 02 APR 2020

MECHANICAL OUTLINE PRINT VERSION NOT TO SCALE	STANDARD: NON JEDEC	DRAWING NUMBER: 98ASA01485D	REVISION: A	PAGE: 2
--	------------------------	--------------------------------	----------------	------------

H-PDFN-6 I/O
7 X 6.5 X 1.55 PKG, 1.6 PITCH

SOT2030-1

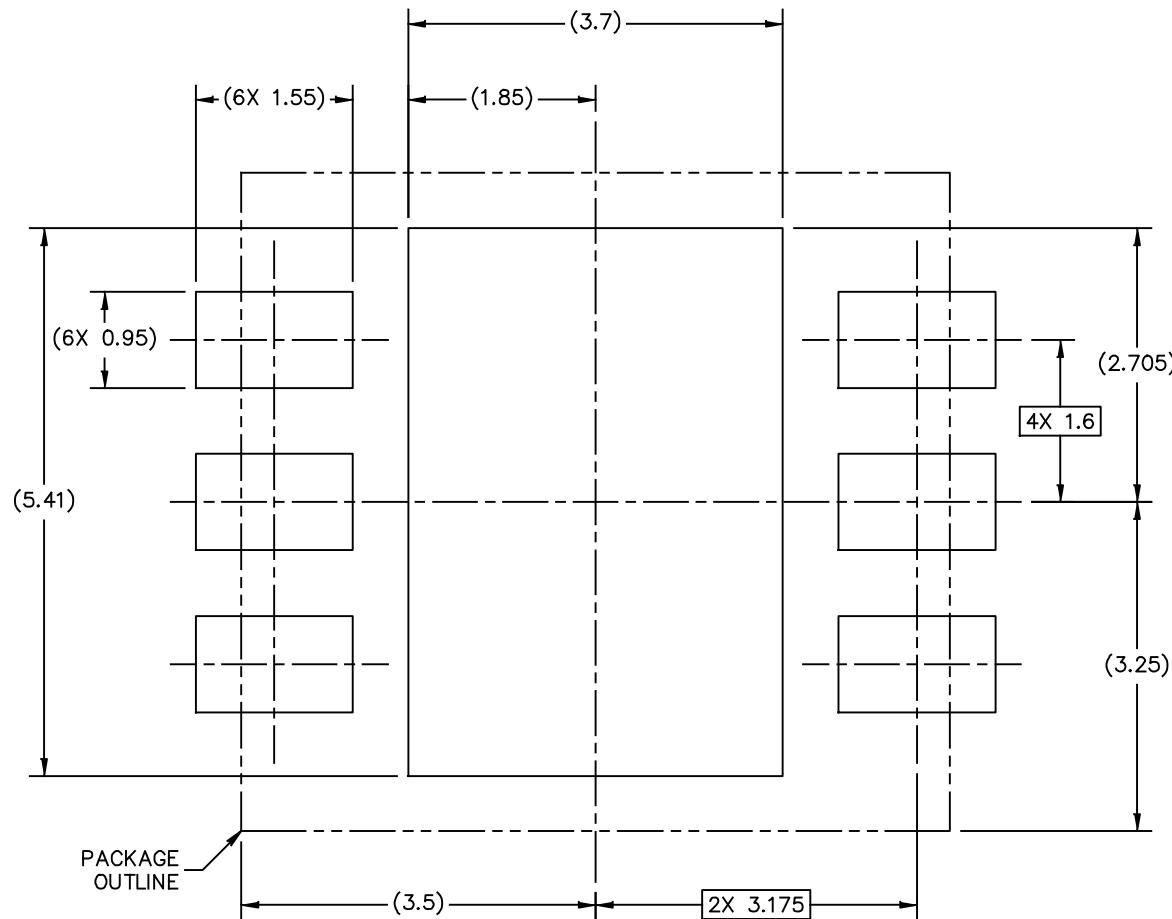

PCB DESIGN GUIDELINES – SOLDER MASK OPENING PATTERN

THIS SHEET SERVES ONLY AS A GUIDELINE TO HELP DEVELOP A USER SPECIFIC SOLUTION. DEVELOPMENT EFFORT WILL STILL BE REQUIRED BY END USERS TO OPTIMIZE PCB MOUNTING PROCESSES AND BOARD DESIGN IN ORDER TO MEET INDIVIDUAL/SPECIFIC REQUIREMENTS.


© NXP B.V. ALL RIGHTS RESERVED

DATE: 02 APR 2020

© NAF B.V. ALL RIGHTS RESERVED DATE: 02 APR 2020
 MECHANICAL OUTLINE STANDARD: DRAWING NUMBER: REVISION: PAGE:
 PRINT VERSION NOT TO SCALE NON JEDEC 98ASA01485D A 3

H-PDFN-6 I/O
7 X 6.5 X 1.55 PKG, 1.6 PITCH

SOT2030-1

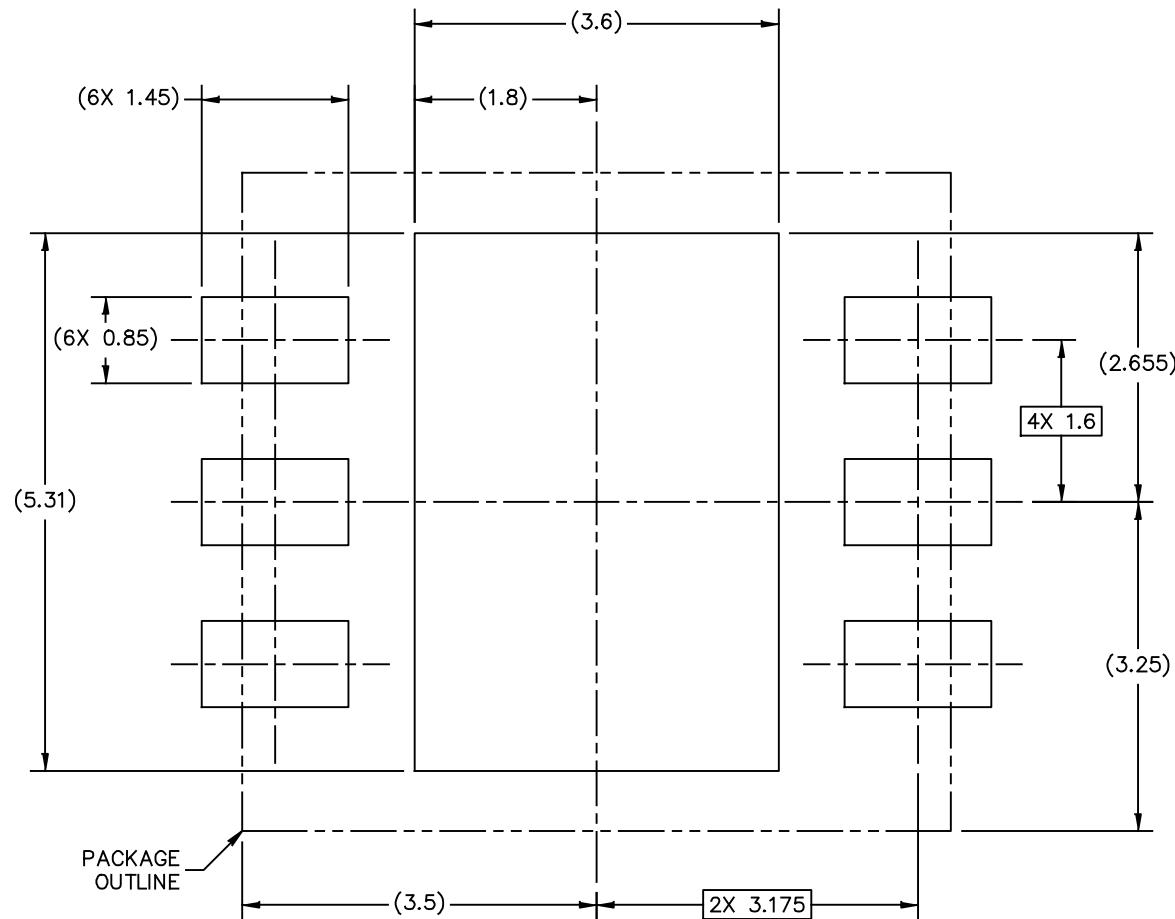

PCB DESIGN GUIDELINES – I/O PADS AND SOLDERABLE AREA

THIS SHEET SERVES ONLY AS A GUIDELINE TO HELP DEVELOP A USER SPECIFIC SOLUTION.
 DEVELOPMENT EFFORT WILL STILL BE REQUIRED BY END USERS TO OPTIMIZE PCB MOUNTING
 PROCESSES AND BOARD DESIGN IN ORDER TO MEET INDIVIDUAL/SPECIFIC REQUIREMENTS.


© NXP B.V. ALL RIGHTS RESERVED

DATE: 02 APR 2020

MECHANICAL OUTLINE PRINT VERSION NOT TO SCALE	STANDARD: NON JEDEC	DRAWING NUMBER: 98ASA01485D	REVISION: A	PAGE: 4
--	------------------------	--------------------------------	----------------	------------

H-PDFN-6 I/O
7 X 6.5 X 1.55 PKG, 1.6 PITCH

SOT2030-1

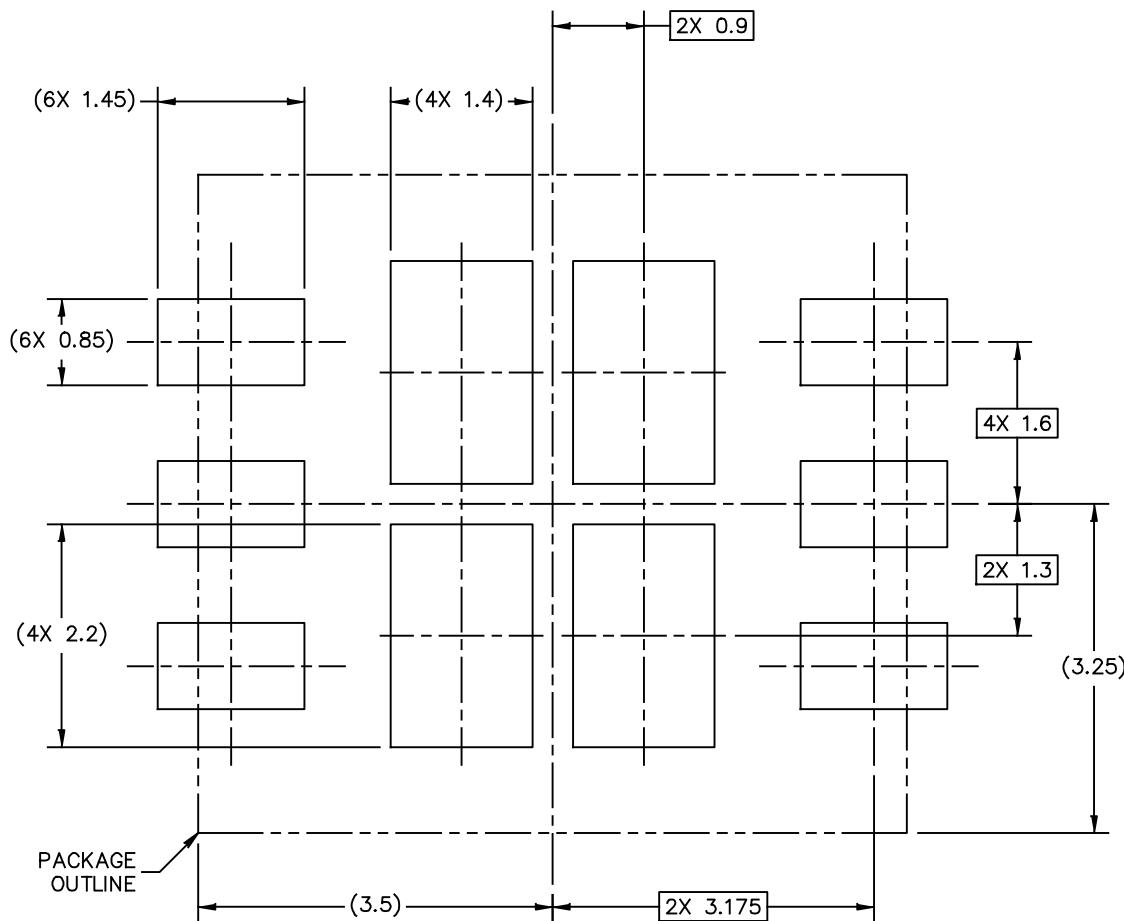

STENCIL THICKNESS 0.125 OR 0.15

PCB DESIGN GUIDELINES – SOLDER PASTE STENCILS

THIS SHEET SERVES ONLY AS A GUIDELINE TO HELP DEVELOP A USER SPECIFIC SOLUTION. DEVELOPMENT EFFORT WILL STILL BE REQUIRED BY END USERS TO OPTIMIZE PCB MOUNTING PROCESSES AND BOARD DESIGN IN ORDER TO MEET INDIVIDUAL/SPECIFIC REQUIREMENTS.

© NXP B.V. ALL RIGHTS RESERVED

DATE: 02 APR 2020

© NXP B.V. ALL RIGHTS RESERVED DATE: 02 APR 2020
 MECHANICAL OUTLINE STANDARD: DRAWING NUMBER: REVISION: PAGE:
 PRINT VERSION NOT TO SCALE NON JEDEC 98ASA01485D A 5

H-PDFN-6 I/O
7 X 6.5 X 1.55 PKG, 1.6 PITCH

SOT2030-1

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-1994.
3. PIN 1 FEATURE SHAPE, SIZE AND LOCATION MAY VARY.
4. COPLANARITY APPLIES TO LEADS AND DIE ATTACH FLAG.
5. RADIUS ON LEAD AND DIE ATTACH FLAG IS OPTIONAL.

© NXP B.V. ALL RIGHTS RESERVED

DATE: 02 APR 2020

MECHANICAL OUTLINE PRINT VERSION NOT TO SCALE	STANDARD: NON JEDEC	DRAWING NUMBER: 98ASA01485D	REVISION: A	PAGE: 6
--	------------------------	--------------------------------	----------------	------------

Product Documentation and Software

Refer to the following resources to aid your design process.

Application Notes

- AN1907: Solder Reflow Attach Method for High Power RF Devices in Plastic Packages
- AN1955: Thermal Measurement Methodology of RF Power Amplifiers

Software

- .s2p File

Revision History

The following table summarizes revisions to this document.

Revision	Date	Description
0	Dec. 2020	<ul style="list-style-type: none">• Initial release of data sheet
1	Jan. 2021	<ul style="list-style-type: none">• Table 1, Maximum Ratings: updated operating voltage for complete data sheet standardization, p. 2• Table 2, Recommended Operating Conditions: added to data sheet, p. 2
2	Mar. 2021	<ul style="list-style-type: none">• Updated frequency band of operation for this device to 100–2690 MHz, p. 1

How to Reach Us

Home Page
nxp.com

Web Support:
nxp.com/support

Information in this document is provided solely to enable system and software implementers to use NXP products. There are no express or implied copyright licenses granted hereunder to design or fabricate any integrated circuits based on the information in this document. NXP reserves the right to make changes without further notice to any products herein.

NXP makes no warranty, representation, or guarantee regarding the suitability of its products for any particular purpose, nor does NXP assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters that may be provided in NXP data sheets and/or specifications can and do vary in different applications, and actual performance may vary over time. All operating parameters, including "typicals," must be validated for each customer application by customer's technical experts. NXP does not convey any license under its patent rights nor the rights of others. NXP sells products pursuant to standard terms and conditions of sale, which can be found at the following address: nxp.com/SalesTermsandConditions.

NXP, the NXP logo and Airfast are trademarks of NXP B.V. All other product or service names are the property of their respective owners.