

3-terminal filters  
For Signal line  
ACF series



# ACF451832 type



## FEATURES

- It is a product with excellent attenuation characteristics in which the T-type filter circuit is magnetically shielded with ferrite.
- Achieve excellent attenuation characteristics by using it for circuits with stable grounds.
- Does not require mounting space due to vertical mounting design, making it perfect for high-density circuits.
- Use this product under reflow soldering conditions.

## APPLICATION

- HE devices (TVs, VTRs, CD players, electronic musical instruments, PCs, etc.)
- OA equipment (Computers, terminals, facsimiles, etc.)
- FA equipment (Robots, NC machine tools, process controllers, etc.)

## PART NUMBER CONSTRUCTION


ACF	451832	-	223	-	T	D01
Series name	LxWxT dimensions (mm)		Capacitance (pF)		Packaging style	Internal code

## CHARACTERISTICS SPECIFICATION TABLE

Insertion loss 25dB frequency range (MHz)	Rated voltage (V)max.	Rated current (mA)max.	DC resistance [Terminal No.1 to 3] (Ω)max.	Insulation resistance [Terminal No.1 to 2/No.2 to 3] (MΩ)min.	Part No.
7 to 60	50	300	0.15	1000	<a href="#">ACF451832-333-TD01</a>
9 to 65	50	300	0.15	1000	<a href="#">ACF451832-223-TD01</a>
11 to 70	50	300	0.15	1000	<a href="#">ACF451832-153-TD01</a>
15 to 75	50	300	0.15	1000	<a href="#">ACF451832-103-TD01</a>
20 to 85	50	300	0.15	1000	<a href="#">ACF451832-682-TD01</a>
25 to 90	50	300	0.15	1000	<a href="#">ACF451832-472-TD01</a>
35 to 100	50	300	0.15	1000	<a href="#">ACF451832-332-TD01</a>
40 to 110	50	300	0.15	1000	<a href="#">ACF451832-222-TD01</a>
50 to 130	50	300	0.15	1000	<a href="#">ACF451832-152-TD01</a>
65 to 150	50	300	0.15	1000	<a href="#">ACF451832-102-TD01</a>
75 to 160	50	300	0.15	1000	<a href="#">ACF451832-681-TD01</a>
95 to 180	50	300	0.15	1000	<a href="#">ACF451832-471-TD01</a>
115 to 205	50	300	0.15	1000	<a href="#">ACF451832-331-TD01</a>
150 to 250	50	300	0.15	1000	<a href="#">ACF451832-221-TD01</a>
190 to 290	50	300	0.15	1000	<a href="#">ACF451832-151-TD01</a>
235 to 335	50	300	0.15	1000	<a href="#">ACF451832-101-TD01</a>
295 to 395	50	300	0.15	1000	<a href="#">ACF451832-680-TD01</a>
360 to 460	50	300	0.15	1000	<a href="#">ACF451832-470-TD01</a>
450 to 550	50	300	0.15	1000	<a href="#">ACF451832-330-TD01</a>
550 to 650	50	300	0.15	1000	<a href="#">ACF451832-220-TD01</a>


# ACF451832 type

## SHAPE & DIMENSIONS

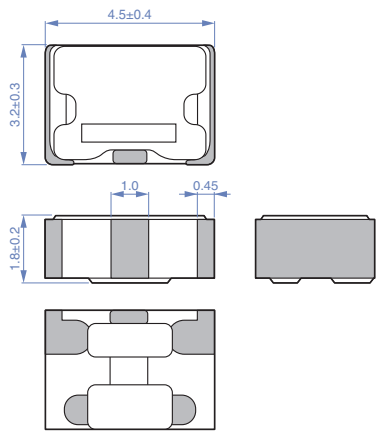


Dimensions in mm

## RECOMMENDED LAND PATTERN




Dimensions in mm

## CIRCUIT DIAGRAM




• No polarity

## RECOMMENDED REFLOW PROFILE

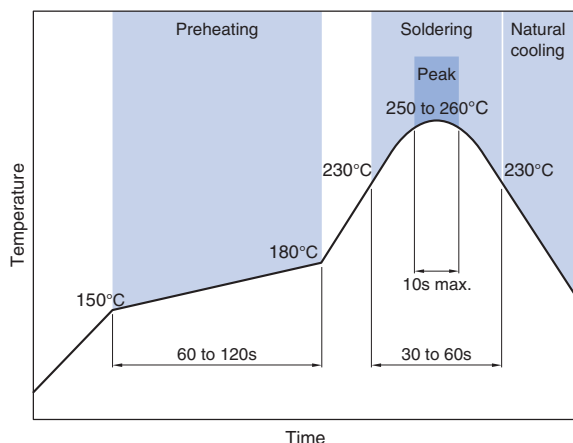


## PACKAGING STYLE

### REEL DIMENSIONS

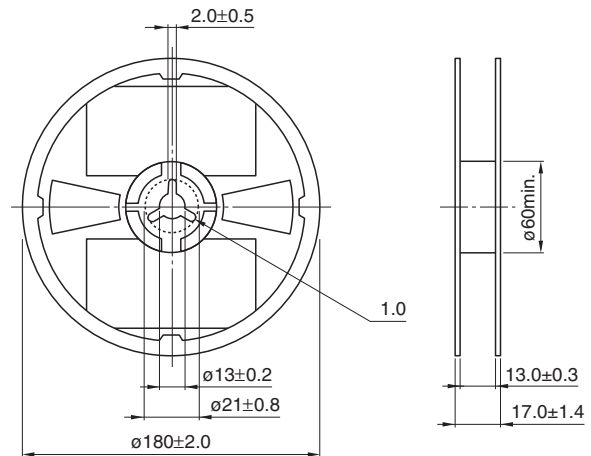


Dimensions in mm

### TAPE DIMENSIONS

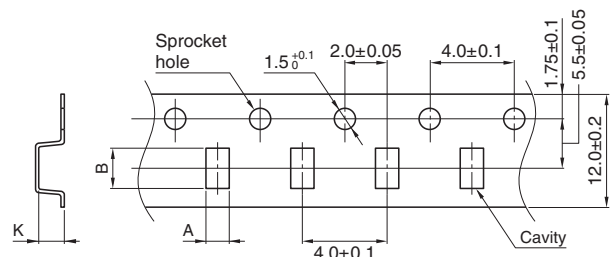

Dimensions in mm

Type	A	B	K
ACF451832	2.2±0.1	5.2±0.2	3.5±0.2

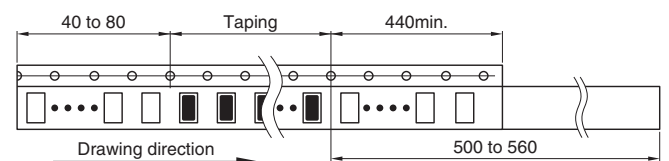

Dimensions in mm

### Package quantity

Package quantity	1,000 pcs/reel
------------------	----------------

## TEMPERATURE RANGE, INDIVIDUAL WEIGHT

Operating temperature range	Storage temperature range*	Individual weight
-20 to +85 °C	-20 to +85 °C	130 mg

\* The storage temperature range is for after the assembly.

## REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

### SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using this products.

#### ⚠ REMINDERS

- The storage period is less than 12 months. Be sure to follow the storage conditions (temperature: 5 to 40°C, humidity: 10 to 75% RH or less).  
If the storage period elapses, the soldering of the terminal electrodes may deteriorate.
- Do not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.).
- Before soldering, be sure to preheat components.  
The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications.  
If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions.
- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Carefully lay out the coil for the circuit board design of the non-magnetic shield type.  
A malfunction may occur due to magnetic interference.
- Use a wrist band to discharge static electricity in your body through the grounding wire.
- Do not expose the products to magnets or magnetic fields.
- Do not use for a purpose outside of the contents regulated in the delivery specifications.
- The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.  
The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.  
If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions set forth in the each catalog, please contact us.

- (1) Aerospace/aviation equipment
- (2) Transportation equipment (cars, electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.