

ADM709

FEATURES

- Precision Supply Voltage Monitor
- +5 V, +3.3 V, +3 V Power Supply Monitor
- 35 μ A Quiescent Current
- 140 ms (min) Power-On Reset Pulse
- Low Cost
- 8-Pin DIP/SO Packages
- Upgrade for MAX709

APPLICATIONS

- Microprocessor Systems
- Computers
- Controllers
- Intelligent Instruments
- Critical μ P Monitoring
- Automotive Systems
- Critical μ P Power Monitoring

GENERAL DESCRIPTION

The ADM709 contains a power supply monitor which generates a system reset during power-up, power-down and brownout conditions. When V_{CC} falls below the reset threshold, RESET goes low and holds the μ P in reset. On power-up the RESET output is held low for 140 ms after V_{CC} rises above the threshold. The RESET output remains operational with V_{CC} as low as 1 V.



Three supply-voltage threshold levels are available suitable for +5 V, +3.3 V and for +3 V supply monitoring. The actual reset voltage threshold is given below.

The ADM709 is available in 8-pin DIP and SOIC packages.

Table I. Reset Threshold

Suffix	Voltage (V)
L	4.65
M	4.40
T	3.08
S	2.93
R	2.63

FUNCTIONAL BLOCK DIAGRAM

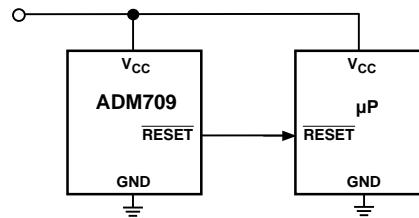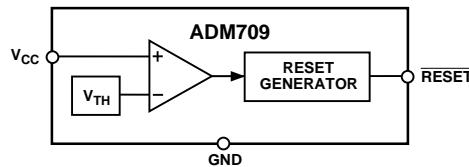

Typical Operating Circuit

ORDERING GUIDE

Model	Reset Threshold	Temperature Range	Package Option*
ADM709LAN	4.65 V	-40°C to +85°C	N-8
ADM709LAR	4.65 V	-40°C to +85°C	SO-8
ADM709MAN	4.40 V	-40°C to +85°C	N-8
ADM709MAR	4.40 V	-40°C to +85°C	SO-8
ADM709TAN	3.08 V	-40°C to +85°C	N-8
ADM709TAR	3.08 V	-40°C to +85°C	SO-8
ADM709SAN	2.93 V	-40°C to +85°C	N-8
ADM709SAR	2.93 V	-40°C to +85°C	SO-8
ADM709RAN	2.63 V	-40°C to +85°C	N-8
ADM709RAR	2.63 V	-40°C to +85°C	SO-8

*N = Plastic DIP; SO = SOIC.

REV. 0

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices.

© Analog Devices, Inc., 1995

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.
Tel: 617/329-4700 Fax: 617/326-8703

ADM709—SPECIFICATIONS (V_{CC} = Full Operating Range, T_A = T_{MIN} to T_{MAX} unless otherwise noted)

Parameter	Min	Typ	Max	Units	Test Conditions/Comments
V _{CC} Operating Voltage Range	1.0	5.5	V	T _A = 0°C to +70°C	
	1.2	5.5	V	T _A = -40°C to +85°C	
Supply Current	35	85	µA	V _{CC} < 3.6 V, T _A = 0°C to +70°C	
	35	110	µA	V _{CC} < 3.6 V, T _A = -40°C to +85°C	
	65	150	µA	V _{CC} < 5.5 V, T _A = 0°C to +70°C	
	65	200	µA	V _{CC} < 5.5 V, T _A = -40°C to +85°C	
Reset Threshold	4.5	4.65	4.75	V	ADM709L
	4.25	4.40	4.50	V	ADM709M
	3.00	3.08	3.15	V	ADM709T
	2.85	2.93	3.00	V	ADM709S
	2.55	2.63	2.70	V	ADM709R
V _{CC} to <u>RESET</u> Delay	20			µs	V _{CC} = Reset Threshold max-min
<u>RESET</u> Active Time-Out Period	140	280	380	ms	V _{CC} = Reset Threshold max, V _{CC} Rising
<u>RESET</u> Output Voltage				V	ADM709R/S/T, I _{SINK} = 1.2 mA. V _{CC} = Reset Threshold min
			0.3	V	ADM709L/M, I _{SINK} = 3.2 mA. V _{CC} = Reset Threshold min
			0.4	V	I _{SINK} = 50 µA. V _{CC} ≥ 1.0 V
			0.3	V	I _{SINK} = 100 µA. V _{CC} ≥ 1.2 V
		0.8 × V _{CC}	0.4	V	ADM709R/S/T, I _{SOURCE} = 500 µA, V _{CC} ≥ Reset Threshold max
		V _{CC} - 1.5 V		V	ADM709L/M, I _{SOURCE} = 800 µA, V _{CC} ≥ Reset Threshold max

Specifications subject to change without notice.

ABSOLUTE MAXIMUM RATINGS*

(T_A = +25°C unless otherwise noted)


V _{CC}	-0.3 V to +6 V
RESET Output	-0.3 V to V _{CC} + 0.3 V
V _{CC} Input Current	20 mA
RESET Output Current	20 mA
Power Dissipation, N-8 DIP	727 mW
θ _{JA} Thermal Impedance	135°C/W
Power Dissipation, SO-8 SOIC	470 mW
θ _{JA} Thermal Impedance	110°C/W
Operating Temperature Range	
Industrial (A Version)	-40°C to +85°C
Lead Temperature (Soldering, 10 secs)	+300°C
Vapor Phase (60 secs)	+215°C
Infrared (15 secs)	+220°C
Storage Temperature Range	-65°C to +150°C
ESD Rating	>5 kV

*Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those listed in the operational sections of this specification is not implied. Exposure to absolute maximum ratings for extended periods of time may affect device reliability.

PIN FUNCTION DESCRIPTION

Mnemonic	Pin No.	Function
NC	1, 4, 5, 6, 8	No Connect Pins.
V _{CC}	2	+5 V, +3.3 V, +3 V Power Supply Input.
RESET	7	Logic Output. It remains low while V _{CC} is below the reset threshold voltage and for 280 ms (typ) after V _{CC} rises above the threshold.
GND	3	Ground, 0 V.

PIN CONFIGURATION

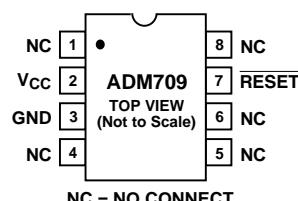

NC = NO CONNECT

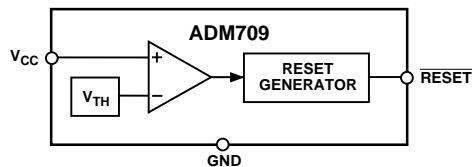


Figure 1. Functional Block Diagram

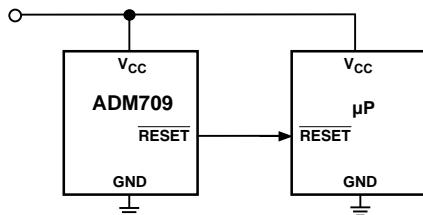


Figure 2. Typical Operating Circuit

CIRCUIT INFORMATION

RESET Output

RESET is an active low output which provides a reset signal to the microprocessor whenever the V_{CC} supply voltage is below the reset threshold. An internal timer holds RESET low for 140 ms after the voltage on V_{CC} rises above the threshold. This is intended as a power-on reset signal for the processor. It allows time for the power supply and microprocessor to stabilize after power up. Similarly a power supply brownout will initiate a processor reset. On power-down, the RESET output remains low with V_{CC} as low as 1 V. This ensures that the microprocessor is held in a stable shutdown condition as the power supply drops.

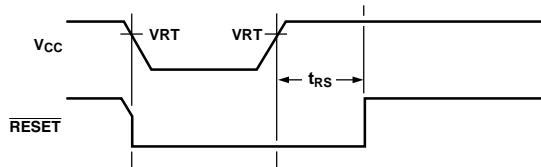
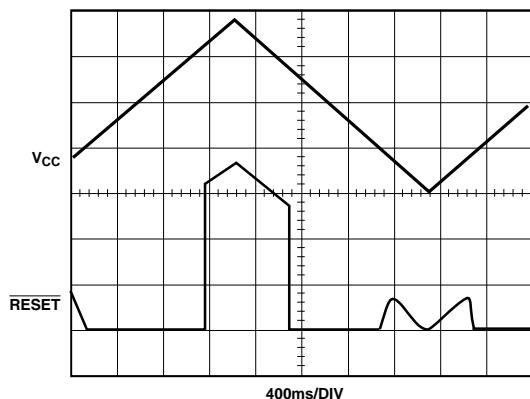
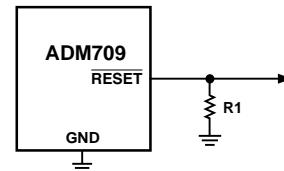


Figure 3. Power Off/On RESET Timing

Figure 4. RESET Output vs. V_{CC}

RESET at Voltages < 1 V

The ADM709 RESET output is guaranteed to operate with supply voltages as low as 1 V. If it is desired that the RESET output remains low below 1 V, then a pull-down resistor should be connected between the RESET output and GND. A resistor of 100 kΩ is suitable. This is illustrated in Figure 5.

Figure 5. RESET Valid @ V_{CC} < 1 V

Glitch Immunity

The ADM709 is immune to short transients which may occur on the V_{CC} line. This is important so that spurious resets are not generated as a result of minor glitches on the power supply.

Additional glitch immunity may be obtained by connecting a capacitor (0.1 μF or greater) as close as possible to the V_{CC} pin on the device.

Microprocessors with Bidirectional I-O

Some microprocessors or microcontrollers such as the MC68HC11 have bidirectional reset lines. In order to avoid signal contention, a resistor of 4.7 kΩ should be connected between the ADM709 RESET output and the microcontroller RESET line. This arrangement is shown in Figure 6.

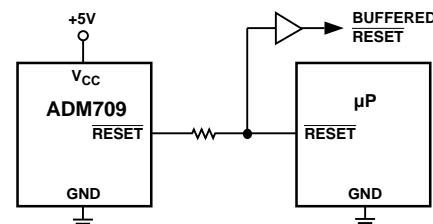



Figure 6. Interfacing to Microprocessors with Bidirectional RESET

ADM709

OUTLINE DIMENSIONS

Dimensions shown in inches and (mm).

8-Lead Plastic DIP (N-8)

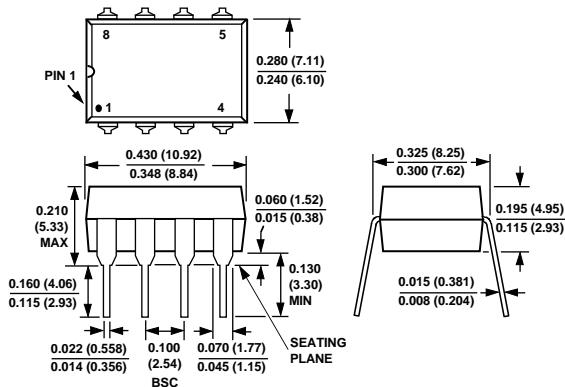

8-Lead SOIC (SO-8)

