

## MM74C73 • MM74C76

### Dual J-K Flip-Flops with Clear and Preset

#### General Description

The MM74C73 and MM74C76 dual J-K flip-flops are monolithic complementary MOS (CMOS) integrated circuits constructed with N- and P-channel enhancement transistors. Each flip-flop has independent J, K, clock and clear inputs and Q and Q outputs. The MM74C76 flip flops also include preset inputs and are supplied in 16 pin packages. This flip-flop is edge sensitive to the clock input and change state on the negative going transition of the clock pulse. Clear or preset is independent of the clock and is accomplished by a low level on the respective input.

#### Features

- Supply voltage range: 3V to 15V
- Tenth power TTL compatible: Drive 2 LPTTL loads
- High noise immunity: 0.45  $V_{CC}$  (typ.)
- Low power: 50 nW (typ.)
- Medium speed operation: 10 MHz (typ.)

#### Applications


- Automotive
- Data terminals
- Instrumentation
- Medical electronics
- Alarm systems
- Industrial electronics
- Remote metering
- Computers

#### Ordering Code:

| Order Number | Package Number | Package Description                                                          |
|--------------|----------------|------------------------------------------------------------------------------|
| MM74C73N     | N14A           | 14-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide       |
| MM74C76M     | M16A           | 16-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150" Narrow |
| MM74C76N     | N16E           | 16-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide       |


Devices also available in Tape and Reel. Specify by appending suffix letter "X" to the ordering code.

#### Connection Diagrams

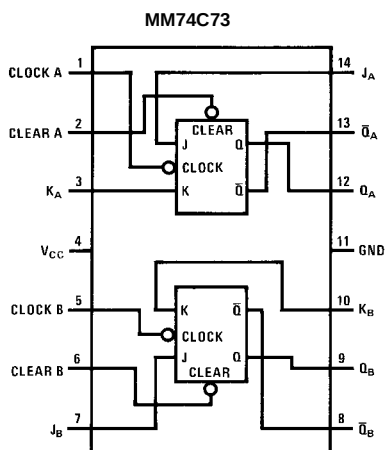

**Note:** A logic "0" on clear sets Q to logic "0".

**Top View**

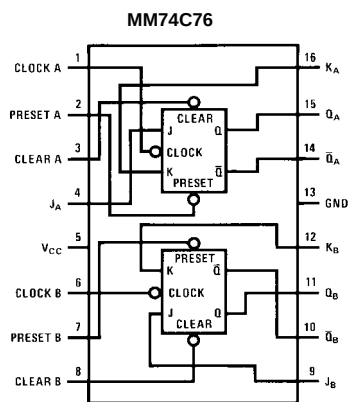

**Note:** A logic "0" on clear sets Q to a logic "0".

**Note:** A logic "0" on preset sets Q to a logic "1".

**Top View**

## Truth Table

| $t_n$ |   | $t_{n+1}$   |
|-------|---|-------------|
| J     | K | Q           |
| 0     | 0 | $Q_n$       |
| 0     | 1 | 0           |
| 1     | 0 | 1           |
| 1     | 1 | $\bar{Q}_n$ |

 $t_n$  = bit time before clock pulse $t_{n+1}$  = bit time after clock pulse





| Preset | Clear | $Q_n$ | $\bar{Q}_n$ |
|--------|-------|-------|-------------|
| 0      | 0     | 0     | 0           |
| 0      | 1     | 1     | 0           |
| 1      | 0     | 0     | 1           |
| 1      | 1     | $Q_n$ | $\bar{Q}_n$ |

(Note 1)

(Note 1)

Note 1: No change in output from previous state

## Logic Diagrams

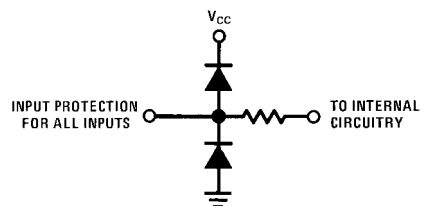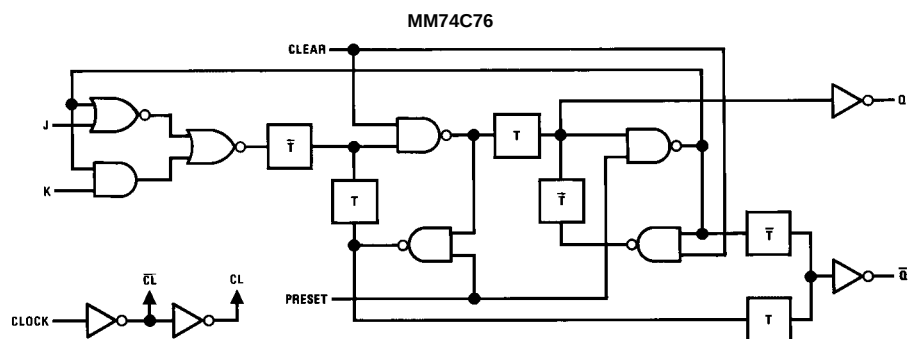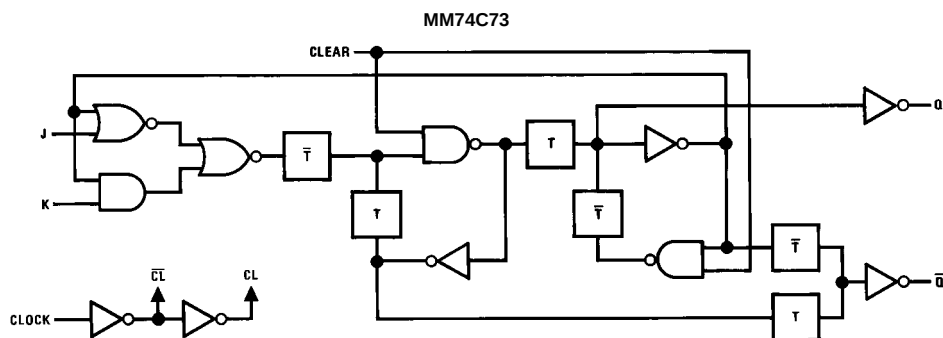

## Absolute Maximum Ratings<sup>(Note 2)</sup>

|                             |                          |
|-----------------------------|--------------------------|
| Voltage at Any Pin          | −0.3V to $V_{CC} + 0.3V$ |
| Operating Temperature Range | −55°C to +125°C          |
| Storage Temperature         | −65°C to +150°C          |
| Power Dissipation           |                          |
| Dual-In-Line                | 700 mW                   |
| Small Outline               | 500 mW                   |
| Lead Temperature            |                          |
| (Soldering, 10 seconds)     | 260°C                    |
| Operating $V_{CC}$ Range    | +3V to 15V               |
| $V_{CC}$ (Max)              | 18V                      |

**Note 2:** "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. Except for "Operating Temperature Range" they are not meant to imply that the devices should be operated at these limits. The table of Electrical Characteristics provides conditions for actual device operation.

## DC Electrical Characteristics

Min/Max limits apply across temperature range unless otherwise noted


| Symbol                                                                              | Parameter                  | Conditions                                                              | Min            | Typ   | Max | Units |
|-------------------------------------------------------------------------------------|----------------------------|-------------------------------------------------------------------------|----------------|-------|-----|-------|
| <b>CMOS TO CMOS</b>                                                                 |                            |                                                                         |                |       |     |       |
| $V_{IN(1)}$                                                                         | Logical "1" Input Voltage  | $V_{CC} = 5V$                                                           | 3.5            |       |     | V     |
|                                                                                     |                            | $V_{CC} = 10V$                                                          | 8              |       |     |       |
| $V_{IN(0)}$                                                                         | Logical "0" Input Voltage  | $V_{CC} = 5V$                                                           |                |       | 1.5 | V     |
|                                                                                     |                            | $V_{CC} = 10V$                                                          |                |       | 2   |       |
| $V_{OUT(1)}$                                                                        | Logical "1" Output Voltage | $V_{CC} = 5V$                                                           | 4.5            |       |     | V     |
|                                                                                     |                            | $V_{CC} = 10V$                                                          | 9              |       |     |       |
| $V_{OUT(0)}$                                                                        | Logical "0" Output Voltage | $V_{CC} = 5V$                                                           |                |       | 0.5 | V     |
|                                                                                     |                            | $V_{CC} = 10V$                                                          |                |       | 1   |       |
| $I_{IN(1)}$                                                                         | Logical "1" Input Current  | $V_{CC} = 15V$                                                          |                |       | 1   | μA    |
| $I_{IN(0)}$                                                                         | Logical "0" Input Current  | $V_{CC} = 15V$                                                          | −1             |       |     | μA    |
| $I_{CC}$                                                                            | Supply Current             | $V_{CC} = 15V$                                                          |                | 0.050 | 60  | μA    |
| <b>LOW POWER TTL TO CMOS INTERFACE</b>                                              |                            |                                                                         |                |       |     |       |
| $V_{IN(1)}$                                                                         | Logical "1" Input Voltage  | $V_{CC} = 4.75V$                                                        | $V_{CC} - 1.5$ |       |     | V     |
| $V_{IN(0)}$                                                                         | Logical "0" Input Voltage  | $V_{CC} = 4.75V$                                                        |                |       | 0.8 | V     |
| $V_{OUT(1)}$                                                                        | Logical "1" Output Voltage | $V_{CC} = 4.75V, I_O = -360 \mu A$                                      | 2.4            |       |     | V     |
| $V_{OUT(0)}$                                                                        | Logical "0" Output Voltage | $V_{CC} = 4.75V, I_O = 360 \mu A$                                       |                |       | 0.4 | V     |
| <b>OUTPUT DRIVE (See Family Characteristics Data Sheet) (Short Circuit Current)</b> |                            |                                                                         |                |       |     |       |
| $I_{SOURCE}$                                                                        | Output Source Current      | $V_{CC} = 5V, V_{IN(0)} = 0V$<br>$T_A = 25^\circ C, V_{OUT} = 0V$       | −1.75          |       |     | mA    |
| $I_{SOURCE}$                                                                        | Output Source Current      | $V_{CC} = 10V, V_{IN(0)} = 0V$<br>$T_A = 25^\circ C, V_{OUT} = 0V$      | −8             |       |     | mA    |
| $I_{SINK}$                                                                          | Output Sink Current        | $V_{CC} = 5V, V_{IN(1)} = 5V$<br>$T_A = 25^\circ C, V_{OUT} = V_{CC}$   | 1.75           |       |     | mA    |
| $I_{SINK}$                                                                          | Output Sink Current        | $V_{CC} = 10V, V_{IN(1)} = 10V$<br>$T_A = 25^\circ C, V_{OUT} = V_{CC}$ | 8              |       |     | mA    |

**AC Electrical Characteristics** (Note 3) $T_A = 25^\circ\text{C}$ ,  $C_L = 50\text{ pF}$ , unless otherwise noted


| Symbol                | Parameter                                                                           | Conditions                      | Min      | Typ        | Max        | Units         |
|-----------------------|-------------------------------------------------------------------------------------|---------------------------------|----------|------------|------------|---------------|
| $C_{IN}$              | Input Capacitance                                                                   | Any Input                       |          | 5          |            | pF            |
| $t_{pd0}$ , $t_{pd1}$ | Propagation Delay Time to a Logical "0" or Logical "1" from Clock to Q or $\bar{Q}$ | $V_{CC} = 5V$<br>$V_{CC} = 10V$ |          | 180<br>70  | 300<br>110 | ns            |
| $t_{pd0}$             | Propagation Delay Time to a Logical "0" from Preset or Clear                        | $V_{CC} = 5V$<br>$V_{CC} = 10V$ |          | 200<br>80  | 300<br>130 | ns            |
| $t_{pd}$              | Propagation Delay Time to a Logical "1" from Preset or Clear                        | $V_{CC} = 5V$<br>$V_{CC} = 10V$ |          | 200<br>80  | 300<br>130 | ns            |
| $t_S$                 | Time Prior to Clock Pulse that Data must be Present                                 | $V_{CC} = 5V$<br>$V_{CC} = 10V$ |          | 110<br>45  | 175<br>70  | ns            |
| $t_H$                 | Time after Clock Pulse that J and K must be Held                                    | $V_{CC} = 5V$<br>$V_{CC} = 10V$ |          | -40<br>-20 | 0<br>0     | ns            |
| $t_{PW}$              | Minimum Clock Pulse Width<br>$t_{WL} = t_{WH}$                                      | $V_{CC} = 5V$<br>$V_{CC} = 10V$ |          | 120<br>50  | 190<br>80  | ns            |
| $t_{PW}$              | Minimum Preset and Clear Pulse Width                                                | $V_{CC} = 5V$<br>$V_{CC} = 10V$ |          | 90<br>40   | 130<br>60  | ns            |
| $t_{MAX}$             | Maximum Toggle Frequency                                                            | $V_{CC} = 5V$<br>$V_{CC} = 10V$ | 2.5<br>7 | 4<br>11    |            | MHz           |
| $t_r$ , $t_f$         | Clock Pulse Rise and Fall Time                                                      | $V_{CC} = 5V$<br>$V_{CC} = 10V$ |          |            | 15<br>5    | $\mu\text{s}$ |

**Note 3:** AC Parameters are guaranteed by DC correlated testing.

## AC Test Circuit




## Switching Time Waveforms

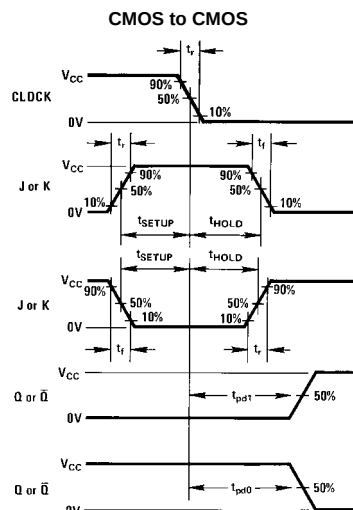


$t_r = t_f = 20 \text{ ns}$

## Typical Applications


### Ripple Binary Counters

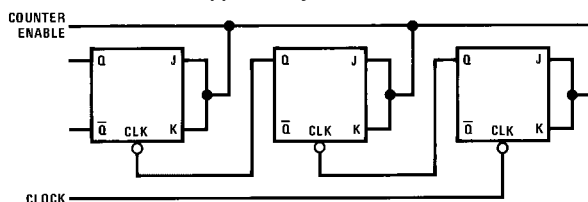


### Shift Registers

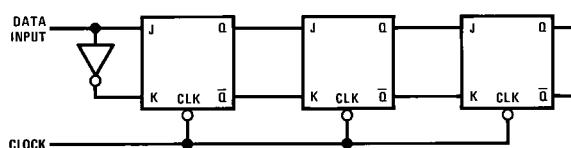


### 74C Compatibility




### Guaranteed Noise Margin as a Function of $V_{CC}$



# Physical Dimensions inches (millimeters) unless otherwise noted

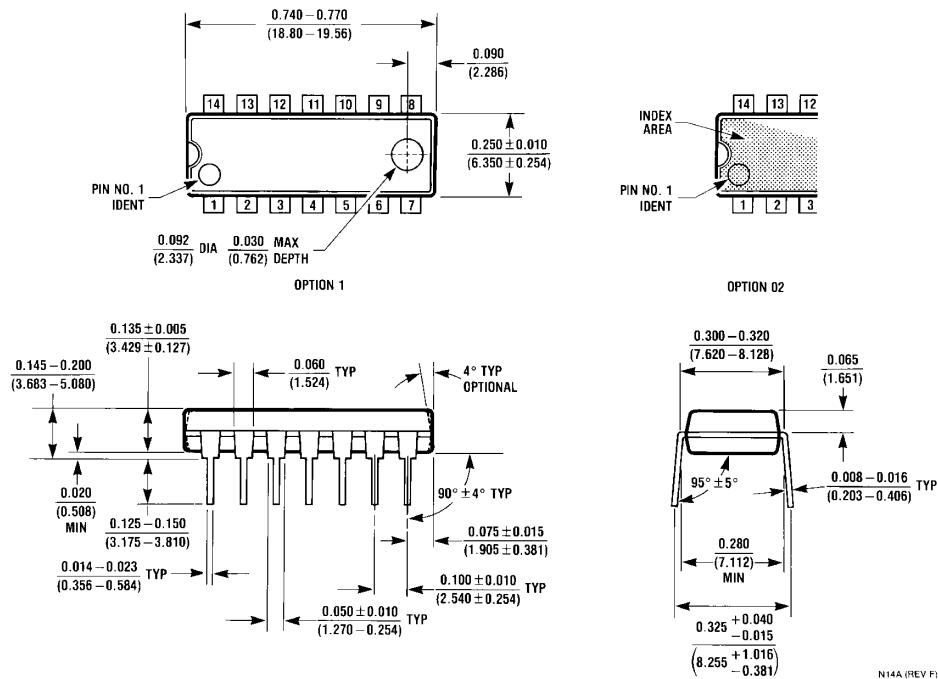


14-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide Package Number N14A

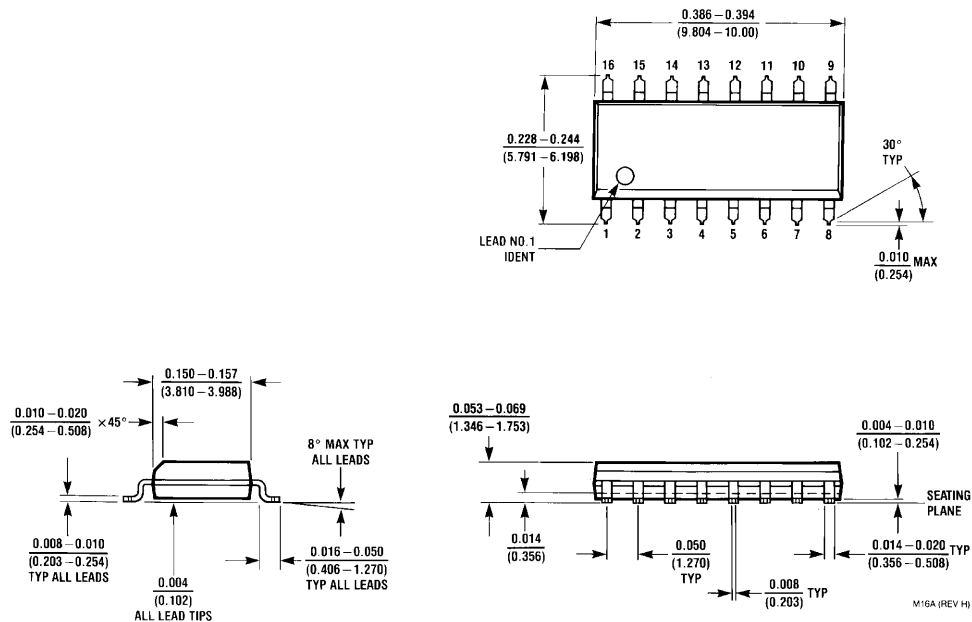

16-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-012, 0.150" Narrow Package Number M16A

# Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

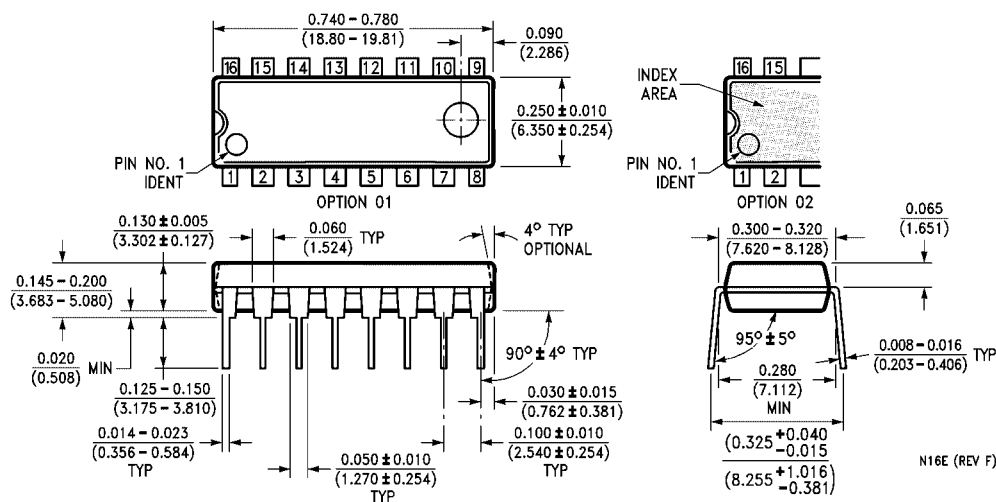

16-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300" Wide  
Package Number N16E

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

[www.fairchildsemi.com](http://www.fairchildsemi.com)