

FEATURES

Pin-compatible with MAX1232 and Dallas DS1232
 Adjustable precision voltage monitor with 4.5 V and 4.75 V options
 Adjustable strobe monitor with 150 ms, 600 ms, or 1.2 sec options
 No external components
 Specified from -40°C to $+85^{\circ}\text{C}$

APPLICATIONS

Microprocessor systems
 Portable equipment
 Computers
 Controllers
 Intelligent instruments
 Automotive systems

GENERAL DESCRIPTION

The ADM1232 is pin-compatible with the MAX1232, DS1232LP, and DS1232. The Analog Devices, Inc., ADM1232 is a microprocessor monitoring circuit that can monitor the following:

- Microprocessor supply voltage
- Whether a microprocessor has locked up
- External interrupts

The ADM1232 is available in four packages: an 8-lead MSOP (RM-8), an 8-lead PDIP (N-8), a 16-lead wide SOIC (RW-16), and an 8-lead narrow SOIC (R-8).

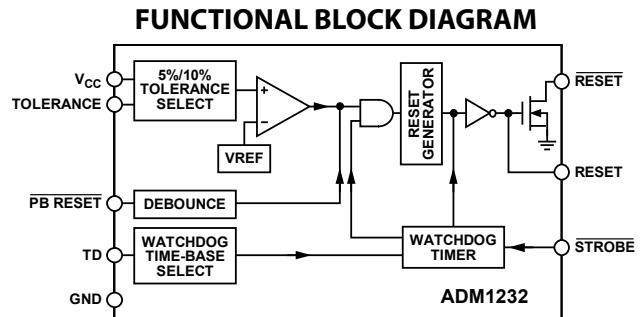


Figure 1.

07522-001

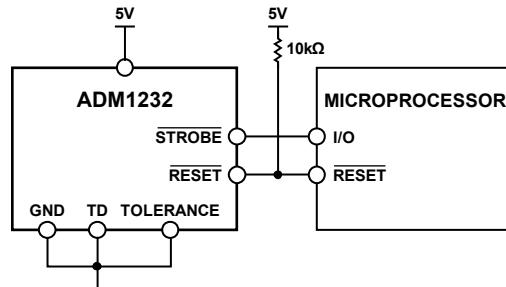


Figure 2. Typical Supply Monitoring Application

07522-002

Rev. C

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.
 Tel: 781.329.4700 www.analog.com
 Fax: 781.461.3113 ©1997-2008 Analog Devices, Inc. All rights reserved.

TABLE OF CONTENTS

| | | | |
|--------------------------------|---|--|---|
| Features | 1 | Pin Configurations and Function Descriptions | 5 |
| Applications | 1 | Circuit Information | 6 |
| Functional Block Diagram | 1 | <u>PB RESET</u> | 6 |
| General Description | 1 | <u>STROBE</u> Timeout Selection | 6 |
| Revision History | 2 | Tolerance | 6 |
| Specifications | 3 | RESET and <u>RESET</u> Outputs | 6 |
| Absolute Maximum Ratings | 4 | Outline Dimensions | 7 |
| Thermal Resistance | 4 | Ordering Guide | 9 |
| ESD Caution | 4 | | |

REVISION HISTORY

12/08—Rev. B to Rev. C

| | |
|--|-----------|
| Updated Format | Universal |
| Changes to Table 2 | 4 |
| Added Thermal Resistance Section | 4 |
| Updated Outline Dimensions | 7 |
| Changes to Ordering Guide | 9 |

12/97—Rev. A to Rev. B

| | |
|---|---|
| Changes to Specifications Section | 2 |
|---|---|

x/97—Rev. 0 to Rev. A

| | |
|---|---|
| Changes to Specifications Section | 2 |
|---|---|

7/97—Revision 0: Initial Version

SPECIFICATIONS

V_{CC} = full operating range, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted.

Table 1.

| Parameter | Min | Typ | Max | Unit | Test Conditions/Comments |
|--|----------------|----------------|----------------|------|---|
| TEMPERATURE | -40 | | +85 | °C | $T_A = T_{MIN}$ to T_{MAX} . |
| POWER SUPPLY | | | | | |
| Voltage | 4.5 | 5.0 | 5.5 | V | |
| Current | | 20 | 50 | µA | V_{IL}, V_{IH} = CMOS levels. |
| | | 200 | 500 | µA | V_{IL}, V_{IH} = TTL levels. |
| STROBE AND PB RESET INPUTS | | | | | |
| Input High Level | 2.0 | | $V_{CC} + 0.3$ | V | |
| Input Low Level | -0.3 | | +0.8 | V | |
| INPUT LEAKAGE CURRENT (STROBE, TOLERANCE) | -1.0 | | +1.0 | µA | |
| TD | | 1.6 | | µA | |
| OUTPUT CURRENT | | | | | |
| RESET | 8 | 10 | | mA | V_{CC} is at 4.5 V to 5.5 V. |
| RESET/RESET | -8 | -12 | | mA | V_{CC} is at 4.5 V to 5.5 V. |
| OUTPUT VOLTAGE | | | | | |
| RESET/RESET | $V_{CC} - 0.5$ | $V_{CC} - 0.1$ | | V | When sourcing less than 500 µA, RESET remains within 0.5 V of V_{CC} on power-down until V_{CC} drops below 2.0 V. When sinking less than 500 µA, RESET remains within 0.5 V of GND on power-down until V_{CC} drops below 2.0 V. |
| RESET/RESET High Level | | 0.4 | | V | |
| RESET/RESET Low Level | 2.4 | | | V | |
| 1 V OPERATION | | | | | |
| RESET Output Voltage | | $V_{CC} - 0.1$ | | V | When sourcing less than 50 µA. |
| RESET Output Voltage | | 0.1 | | V | When sinking less than 50 µA. |
| V_{CC} TRIP POINT | | | | | |
| 5% | 4.5 | 4.62 | 4.74 | V | TOLERANCE = GND. |
| 10% | 4.25 | 4.37 | 4.49 | V | TOLERANCE = V_{CC} . |
| CAPACITANCE | | | | | |
| Input (STROBE, TOLERANCE) | | 5 | | pF | $T_A = 25^\circ C$. |
| Output (RESET, RESET) | | 7 | | pF | $T_A = 25^\circ C$. |
| PB RESET | | | | | |
| Time | 20 | | | ms | PB RESET must be held low for a minimum of 20 ms to guarantee a reset. |
| Delay | 1 | 4 | 20 | ms | |
| RESET ACTIVE TIME | 250 | 610 | 1000 | ms | |
| STROBE | | | | | |
| Pulse Width | 70 | | | ns | |
| Timeout Period | 62.5 | 150 | 250 | ms | TD = 0 V. |
| | 250 | 600 | 1000 | ms | TD = floating. |
| | 500 | 1200 | 2000 | ms | TD = V_{CC} . |
| V_{CC} | | | | | |
| Fall Time | 10 | | | µs | Guaranteed by design. |
| Rise Time | 0 | | | µs | Guaranteed by design. |
| V_{CC} FAIL DETECT TO RESET OUTPUT DELAY | | | | | |
| | | 50 | | µs | RESET and RESET are logically correct. |
| | 250 | 610 | 1000 | ms | After V_{CC} falls below the set tolerance voltage (see Figure 9). |
| | | | | | After V_{CC} rises above the set tolerance voltage. |

ABSOLUTE MAXIMUM RATINGS

$T_A = 25^\circ\text{C}$ unless otherwise noted.

Table 2.

| Parameter | Rating |
|--------------------------------------|----------------------------|
| V_{CC} | 5.5 V |
| Logic Inputs | -0.3 V to $V_{CC} + 0.3$ V |
| Storage Temperature Range | -65°C to +150°C |
| Lead Temperature (Soldering, 10 sec) | 300°C |
| Vapor Phase (60 sec) | 215°C |
| Infrared (15 sec) | 220°C |
| Power Dissipation | |
| N-8 ¹ | 1000 mW |
| RW-16, RM-8 ² | 900 mW |
| R-8 ² | 900 μW |

¹ Derate by 13.5 mW/°C above 25°C.

² Derate by 12 mW/°C above 25°C.

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

THERMAL RESISTANCE

θ_{JA} is specified for the worst-case conditions, that is, a device soldered in a circuit board for surface-mount packages.

Table 3. Thermal Resistance

| Package Type | θ_{JA} | Unit |
|------------------------|---------------|------|
| 8-Lead PDIP (N-8) | 100 | °C/W |
| 16-Lead SOIC_W (RW-16) | 73 | °C/W |
| 8-Lead MSOP (RM-8) | 206 | °C/W |
| 8-Lead SOIC_N (R-8) | 153 | °C/W |

ESD CAUTION



ESD (electrostatic discharge) sensitive device.

Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

PIN CONFIGURATIONS AND FUNCTION DESCRIPTIONS

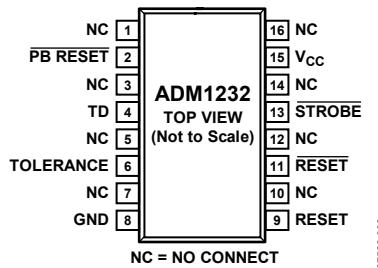


Figure 3. RW-16 Pin Configuration

07522-003

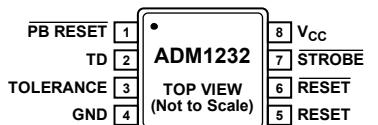


Figure 4. RM-8 Pin Configuration

07522-004

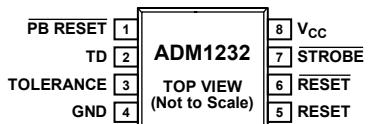


Figure 5. N-8 and R-8 Pin Configuration

07522-005

Table 4. Pin Function Descriptions

| Pin No. | | Mnemonic | Description |
|----------------------------------|----------------|-----------------|---|
| RW-16 | N-8, R-8, RM-8 | | |
| 1, 3, 5, 7, 10, 12, 14, 16 | | NC | No Connection. |
| 2 | 1 | PB RESET | Push-Button Reset Input. This debounced input ignores pulses of less than 1 ms and is guaranteed to respond to pulses greater than 20 ms. |
| 4 | 2 | TD | Time Delay Set. This input allows the user to select the maximum amount of time that the ADM1232 allows the STROBE input to remain inactive—that is, STROBE is not receiving any high-to-low transitions—without forcing the ADM1232 to generate a RESET pulse. See the Specifications section, Figure 8, and the STROBE Timeout Selection section. |
| 6 | 3 | TOLERANCE | Tolerance Input. This input determines how much the supply voltage is allowed to decrease (as a percentage) before a RESET is asserted. Connect this pin to V _{cc} for 10% and to GND for 5%. |
| 8 | 4 | GND | 0 V Ground Reference for All Signals. |
| 9 | 5 | RESET | Active High Logic Output. This pin is asserted when any of the following events occurs: V _{cc} decreases below the amount specified by the TOLERANCE input; when PB RESET is forced low; if there are no high-to-low transitions within the limits set by TD at STROBE; and during power-up. |
| 11 | 6 | RESET | Inverse of RESET. This pin has an open-drain output. |
| 13 | 7 | STROBE | The STROBE input is used to monitor the activity of a microprocessor. If there are no high-to-low transitions within the time specified by TD, a reset is asserted. |
| 15 | 8 | V _{cc} | Power Supply Input, 5 V. |

CIRCUIT INFORMATION

PB RESET

The PB RESET input makes it possible to manually reset a system using either a standard push-button switch or a logic low input. An internal debounce circuit provides glitch immunity when used with a switch, reducing the effects of glitches on the line. The debounce circuit is guaranteed to cause the ADM1232 to assert a reset if PB RESET is brought low for more than 20 ms and is guaranteed to ignore low inputs of less than 1 ms.

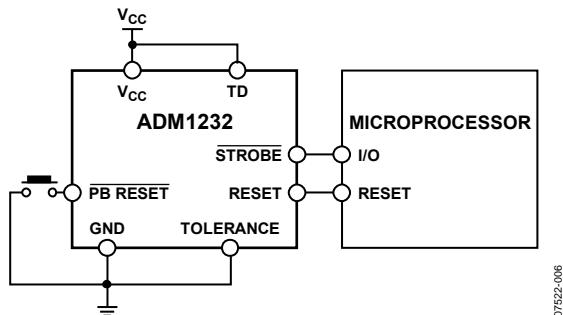


Figure 6. Typical Push-Button Reset Application

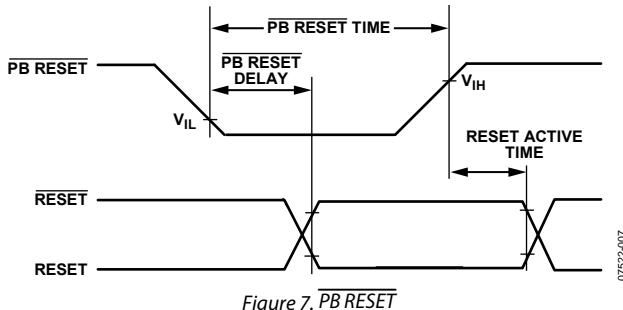


Figure 7. PB RESET

STROBE TIMEOUT SELECTION

TD (time delay) set is used to set the strobe timeout period. The strobe timeout period is the maximum time between high-to-low transitions that STROBE accepts before a reset is asserted (see Figure 8). The strobe timeout settings are listed in Table 5.

Table 5. Strobe Timeout Settings

| Condition | Min | Typ | Max | Unit |
|----------------------|------|------|------|------|
| TD = 0 V | 62.5 | 150 | 250 | ms |
| TD = Floating | 250 | 600 | 1000 | ms |
| TD = V _{cc} | 500 | 1200 | 2000 | ms |

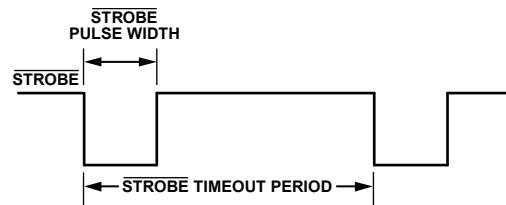


Figure 8. STROBE Parameters

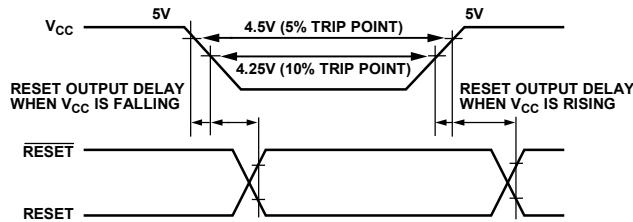


Figure 9. Reset Output Delay


TOLERANCE

The TOLERANCE input is used to determine the level at which V_{cc} can vary below 5 V without the ADM1232 asserting a reset. Connecting TOLERANCE to GND selects a -5% tolerance level and causes the ADM1232 to generate a reset if V_{cc} falls below 4.75 V. If TOLERANCE is connected to V_{cc}, a -10% tolerance level is selected, which causes the ADM1232 to generate a reset if V_{cc} falls below 4.5 V. See the parameters for the V_{cc} trip point in the Specifications section for more information.

RESET AND RESET OUTPUTS

RESET is capable of sourcing and sinking current, whereas RESET is an open-drain MOSFET that sinks current only. Therefore, it is necessary to pull this output high.

OUTLINE DIMENSIONS

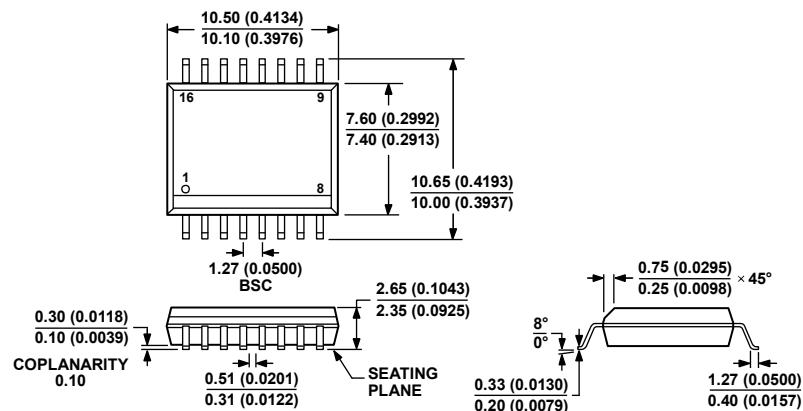

COMPLIANT TO JEDEC STANDARDS MS-013-AA
CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS
(IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR
REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.


032707-B

Figure 10. 16-Lead Standard Small Outline Package [SOIC_W]

Wide Body

(RW-16)

Dimensions shown in millimeters and (inches)

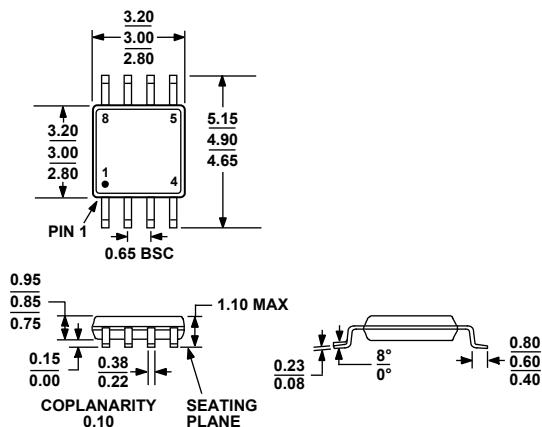


COMPLIANT TO JEDEC STANDARDS MO-187-AA

Figure 11. 8-Lead Mini Small Outline Package [MSOP]

(RM-8)


Dimensions shown in millimeters

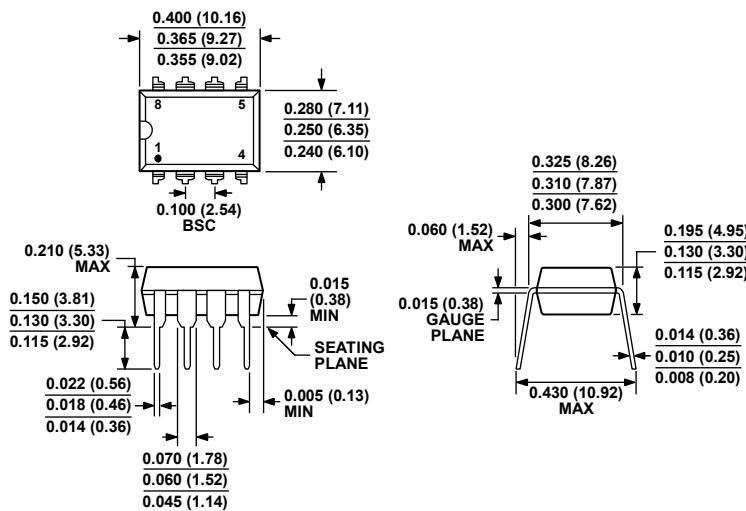

COMPLIANT TO JEDEC STANDARDS MS-001
 CONTROLLING DIMENSIONS ARE IN INCHES; MILLIMETER DIMENSIONS
 (IN PARENTHESES) ARE ROUNDED-OFF INCH EQUIVALENTS FOR
 REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.
 CORNER LEADS MAY BE CONFIGURED AS WHOLE OR HALF LEADS.

070606-A

Figure 12. 8-Lead Plastic Dual In-Line Package [PDIP]
 Narrow Body
 (N-8)
 Dimensions shown in inches and (millimeters)

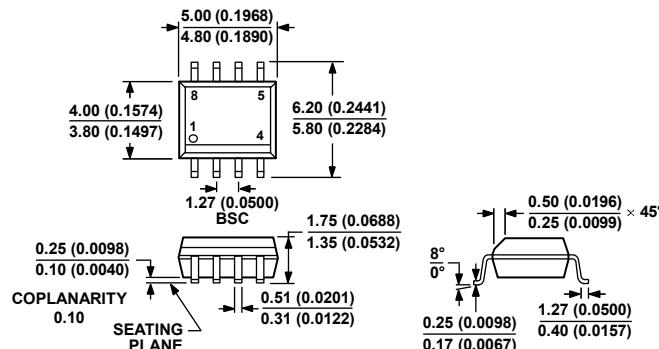

COMPLIANT TO JEDEC STANDARDS MS-012-AA
 CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS
 (IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR
 REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.

012407-A

Figure 13. 8-Lead Standard Small Outline Package [SOIC_N]
 Narrow Body
 (R-8)
 Dimensions shown in millimeters and (inches)

ORDERING GUIDE

| Model | Temperature Range | Package Description | Package Options | Branding |
|--------------------------------|-------------------|--|-----------------|----------|
| ADM1232ARM | –40°C to +85°C | 8-Lead Mini Small Outline Package [MSOP] | RM-8 | M2A |
| ADM1232ARM-REEL | –40°C to +85°C | 8-Lead Mini Small Outline Package [MSOP] | RM-8 | M2A |
| ADM1232ARM-REEL7 | –40°C to +85°C | 8-Lead Mini Small Outline Package [MSOP] | RM-8 | M2A |
| ADM1232ARMZ ¹ | –40°C to +85°C | 8-Lead Mini Small Outline Package [MSOP] | RM-8 | M4W |
| ADM1232ARMZ-REEL ¹ | –40°C to +85°C | 8-Lead Mini Small Outline Package [MSOP] | RM-8 | M4W |
| ADM1232ARMZ-REEL7 ¹ | –40°C to +85°C | 8-Lead Mini Small Outline Package [MSOP] | RM-8 | M4W |
| ADM1232AN | –40°C to +85°C | 8-Lead Plastic Dual In-Line Package [PDIP] | N-8 | |
| ADM1232ANZ ¹ | –40°C to +85°C | 8-Lead Plastic Dual In-Line Package [PDIP] | N-8 | |
| ADM1232ARW | –40°C to +85°C | 16-Lead Standard Small Outline Package [SOIC_W], Wide Body | RW-16 | |
| ADM1232ARW-REEL | –40°C to +85°C | 16-Lead Standard Small Outline Package [SOIC_W], Wide Body | RW-16 | |
| ADM1232ARW-REEL7 | –40°C to +85°C | 16-Lead Standard Small Outline Package [SOIC_W], Wide Body | RW-16 | |
| ADM1232ARWZ ¹ | –40°C to +85°C | 16-Lead Standard Small Outline Package [SOIC_W], Wide Body | RW-16 | |
| ADM1232ARWZ-REEL ¹ | –40°C to +85°C | 16-Lead Standard Small Outline Package [SOIC_W], Wide Body | RW-16 | |
| ADM1232ARWZ-REEL7 ¹ | –40°C to +85°C | 16-Lead Standard Small Outline Package [SOIC_W], Wide Body | RW-16 | |
| ADM1232ARN | –40°C to +85°C | 8-Lead Standard Small Outline Package [SOIC_N] | R-8 | |
| ADM1232ARN-REEL | –40°C to +85°C | 8-Lead Standard Small Outline Package [SOIC_N] | R-8 | |
| ADM1232ARN-REEL7 | –40°C to +85°C | 8-Lead Standard Small Outline Package [SOIC_N] | R-8 | |
| ADM1232ARNZ ¹ | –40°C to +85°C | 8-Lead Standard Small Outline Package [SOIC_N] | R-8 | |
| ADM1232ARNZ-REEL ¹ | –40°C to +85°C | 8-Lead Standard Small Outline Package [SOIC_N] | R-8 | |
| ADM1232ARNZ-REEL7 ¹ | –40°C to +85°C | 8-Lead Standard Small Outline Package [SOIC_N] | R-8 | |

¹ Z = RoHS Compliant Part.

ADM1232

NOTES

ADM1232

NOTES

ADM1232

NOTES

©1997–2008 Analog Devices, Inc. All rights reserved. Trademarks and registered trademarks are the property of their respective owners.
D07522-0-12/08(C)



www.analog.com