

# NVMFS6B14N

## Power MOSFET

100 V, 15 mΩ, 55 A, Single N-Channel

### Features

- Small Footprint (5x6 mm) for Compact Design
- Low  $R_{DS(on)}$  to Minimize Conduction Losses
- Low  $Q_G$  and Capacitance to Minimize Driver Losses
- NVMFS6B14NWF – Wettable Flank Option for Enhanced Optical Inspection
- AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb-Free and are RoHS Compliant

### MAXIMUM RATINGS ( $T_J = 25^\circ\text{C}$ unless otherwise noted)

| Parameter                                                                                                                                                                           |                                               |                        | Symbol                            | Value        | Unit |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------|------------------------|-----------------------------------|--------------|------|
| Drain-to-Source Voltage                                                                                                                                                             |                                               |                        | V <sub>DSS</sub>                  | 100          | V    |
| Gate-to-Source Voltage                                                                                                                                                              |                                               |                        | V <sub>GS</sub>                   | ±16          | V    |
| Continuous Drain Current R <sub>θJC</sub> (Notes 1, 2, 3)                                                                                                                           | Steady State                                  | T <sub>C</sub> = 25°C  | I <sub>D</sub>                    | 55           | A    |
|                                                                                                                                                                                     |                                               | T <sub>C</sub> = 100°C |                                   | 39           |      |
| Power Dissipation R <sub>θJC</sub> (Notes 1, 2)                                                                                                                                     |                                               | T <sub>C</sub> = 25°C  | P <sub>D</sub>                    | 94           | W    |
|                                                                                                                                                                                     |                                               | T <sub>C</sub> = 100°C |                                   | 47           |      |
| Continuous Drain Current R <sub>θJA</sub> (Notes 1, 2, 3)                                                                                                                           | Steady State                                  | T <sub>A</sub> = 25°C  | I <sub>D</sub>                    | 11           | A    |
|                                                                                                                                                                                     |                                               | T <sub>A</sub> = 100°C |                                   | 8.0          |      |
| Power Dissipation R <sub>θJA</sub> (Notes 1 & 2)                                                                                                                                    |                                               | T <sub>A</sub> = 25°C  | P <sub>D</sub>                    | 3.8          | W    |
|                                                                                                                                                                                     |                                               | T <sub>A</sub> = 100°C |                                   | 1.9          |      |
| Pulsed Drain Current                                                                                                                                                                | T <sub>A</sub> = 25°C, t <sub>p</sub> = 10 μs |                        | I <sub>DM</sub>                   | 140          | A    |
| Operating Junction and Storage Temperature                                                                                                                                          |                                               |                        | T <sub>J</sub> , T <sub>stg</sub> | -55 to + 175 | °C   |
| Source Current (Body Diode)                                                                                                                                                         |                                               |                        | I <sub>S</sub>                    | 60           | A    |
| Single Pulse Drain-to-Source Avalanche Energy (T <sub>J</sub> = 25°C, V <sub>DD</sub> = 50 V, V <sub>GS</sub> = 10 V, I <sub>L(pk)</sub> = 24 A, L = 0.1 mH, R <sub>G</sub> = 25 Ω) |                                               |                        | E <sub>AS</sub>                   | 29           | mJ   |
| Lead Temperature for Soldering Purposes (1/8" from case for 10 s)                                                                                                                   |                                               |                        | T <sub>L</sub>                    | 260          | °C   |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

### THERMAL RESISTANCE MAXIMUM RATINGS

| Parameter                                   | Symbol          | Value | Unit               |
|---------------------------------------------|-----------------|-------|--------------------|
| Junction-to-Case – Steady State             | $R_{\theta JC}$ | 1.6   | $^\circ\text{C/W}$ |
| Junction-to-Ambient – Steady State (Note 2) | $R_{\theta JA}$ | 40    |                    |

1. The entire application environment impacts the thermal resistance values shown, they are not constants and are only valid for the particular conditions noted.
2. Surface-mounted on FR4 board using a 650 mm<sup>2</sup>, 2 oz. Cu pad.
3. Maximum current for pulses as long as 1 second is higher but is dependent on pulse duration and duty cycle.




ON Semiconductor®

[www.onsemi.com](http://www.onsemi.com)

| $V_{(BR)DSS}$ | $R_{DS(ON)} \text{ MAX}$ | $I_D \text{ MAX}$ |
|---------------|--------------------------|-------------------|
| 100 V         | 15 mΩ @ 10 V             | 55 A              |




N-CHANNEL MOSFET



DFN5  
(SO-8FL)  
CASE 488AA  
STYLE 1

### MARKING DIAGRAM



A = Assembly Location  
Y = Year  
W = Work Week  
ZZ = Lot Traceability

### ORDERING INFORMATION

See detailed ordering, marking and shipping information on page 5 of this data sheet.

# NVMFS6B14N

## ELECTRICAL CHARACTERISTICS ( $T_J = 25^\circ\text{C}$ unless otherwise specified)

| Parameter | Symbol | Test Condition | Min | Typ | Max | Unit |
|-----------|--------|----------------|-----|-----|-----|------|
|-----------|--------|----------------|-----|-----|-----|------|

### OFF CHARACTERISTICS

|                                                           |                   |                                                     |                           |    |     |                      |
|-----------------------------------------------------------|-------------------|-----------------------------------------------------|---------------------------|----|-----|----------------------|
| Drain-to-Source Breakdown Voltage                         | $V_{(BR)DSS}$     | $V_{GS} = 0\text{ V}, I_D = 250\text{ }\mu\text{A}$ | 100                       |    |     | V                    |
| Drain-to-Source Breakdown Voltage Temperature Coefficient | $V_{(BR)DSS}/T_J$ |                                                     |                           | 80 |     | mV/ $^\circ\text{C}$ |
| Zero Gate Voltage Drain Current                           | $I_{DSS}$         | $V_{GS} = 0\text{ V}, V_{DS} = 80\text{ V}$         | $T_J = 25^\circ\text{C}$  |    | 10  | $\mu\text{A}$        |
|                                                           |                   |                                                     | $T_J = 125^\circ\text{C}$ |    | 100 |                      |
| Gate-to-Source Leakage Current                            | $I_{GSS}$         | $V_{DS} = 0\text{ V}, V_{GS} = 16\text{ V}$         |                           |    | 100 | nA                   |

### ON CHARACTERISTICS (Note 4)

|                                            |                  |                                                 |     |      |     |                      |
|--------------------------------------------|------------------|-------------------------------------------------|-----|------|-----|----------------------|
| Gate Threshold Voltage                     | $V_{GS(TH)}$     | $V_{GS} = V_{DS}, I_D = 250\text{ }\mu\text{A}$ | 2.0 |      | 4.0 | V                    |
| Negative Threshold Temperature Coefficient | $V_{GS(TH)}/T_J$ |                                                 |     | -8.5 |     | mV/ $^\circ\text{C}$ |
| Drain-to-Source On Resistance              | $R_{DS(on)}$     | $V_{GS} = 10\text{ V}, I_D = 20\text{ A}$       |     | 12.2 | 15  | m $\Omega$           |

### CHARGES, CAPACITANCES & GATE RESISTANCE

|                              |              |                                                                 |  |      |  |          |
|------------------------------|--------------|-----------------------------------------------------------------|--|------|--|----------|
| Input Capacitance            | $C_{ISS}$    | $V_{GS} = 0\text{ V}, f = 1\text{ MHz}, V_{DS} = 50\text{ V}$   |  | 1300 |  | pF       |
| Output Capacitance           | $C_{OSS}$    |                                                                 |  | 260  |  |          |
| Reverse Transfer Capacitance | $C_{RSS}$    |                                                                 |  | 18   |  |          |
| Total Gate Charge            | $Q_{G(TOT)}$ | $V_{GS} = 10\text{ V}, V_{DS} = 50\text{ V}, I_D = 20\text{ A}$ |  | 20   |  | nC       |
| Threshold Gate Charge        | $Q_{G(TH)}$  |                                                                 |  | 2.2  |  |          |
| Gate-to-Source Charge        | $Q_{GS}$     |                                                                 |  | 6.4  |  |          |
| Gate-to-Drain Charge         | $Q_{GD}$     |                                                                 |  | 6.5  |  |          |
| Plateau Voltage              | $V_{GP}$     |                                                                 |  | 5.4  |  | V        |
| Gate Resistance              | $R_G$        | $T_J = 25^\circ\text{C}$                                        |  | 1.0  |  | $\Omega$ |

### SWITCHING CHARACTERISTICS (Note 5)

|                     |              |                                                                                          |  |      |  |    |
|---------------------|--------------|------------------------------------------------------------------------------------------|--|------|--|----|
| Turn-On Delay Time  | $t_{d(ON)}$  | $V_{GS} = 10\text{ V}, V_{DS} = 50\text{ V}, I_D = 20\text{ A}, R_G = 1.0\text{ }\Omega$ |  | 9.6  |  | ns |
| Rise Time           | $t_r$        |                                                                                          |  | 39   |  |    |
| Turn-Off Delay Time | $t_{d(OFF)}$ |                                                                                          |  | 16.6 |  |    |
| Fall Time           | $t_f$        |                                                                                          |  | 6.8  |  |    |

### DRAIN-SOURCE DIODE CHARACTERISTICS

|                         |          |                                                                                   |                             |  |      |     |    |
|-------------------------|----------|-----------------------------------------------------------------------------------|-----------------------------|--|------|-----|----|
| Forward Diode Voltage   | $V_{SD}$ | $V_{GS} = 0\text{ V},$<br>$I_S = 20\text{ A}$                                     | $T_J = 25^{\circ}\text{C}$  |  | 0.83 | 1.2 | V  |
|                         |          |                                                                                   | $T_J = 125^{\circ}\text{C}$ |  | 0.8  |     |    |
| Reverse Recovery Time   | $t_{RR}$ | $V_{GS} = 0\text{ V}, dI_S/dt = 100\text{ A}/\mu\text{s},$<br>$I_S = 20\text{ A}$ |                             |  | 45   |     | ns |
| Charge Time             | $t_a$    |                                                                                   |                             |  | 23   |     |    |
| Discharge Time          | $t_b$    |                                                                                   |                             |  | 22   |     |    |
| Reverse Recovery Charge | $Q_{RR}$ |                                                                                   |                             |  | 50   |     | nC |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

4. Pulse Test: pulse width  $\leq 300\text{ }\mu\text{s}$ , duty cycle  $\leq 2\%$ .

5. Switching characteristics are independent of operating junction temperatures.

TYPICAL CHARACTERISTICS

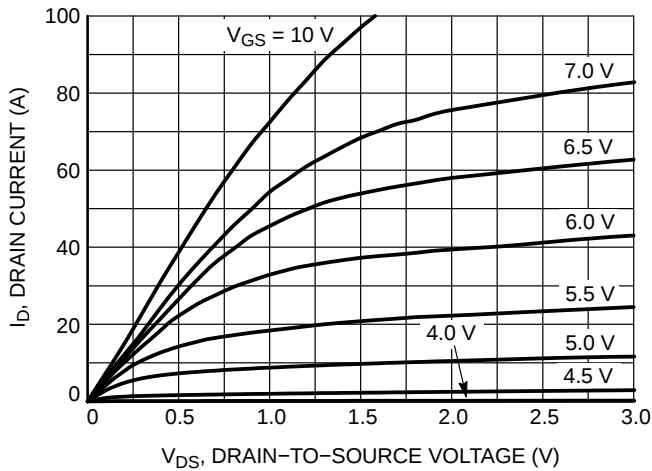


Figure 1. On-Region Characteristics

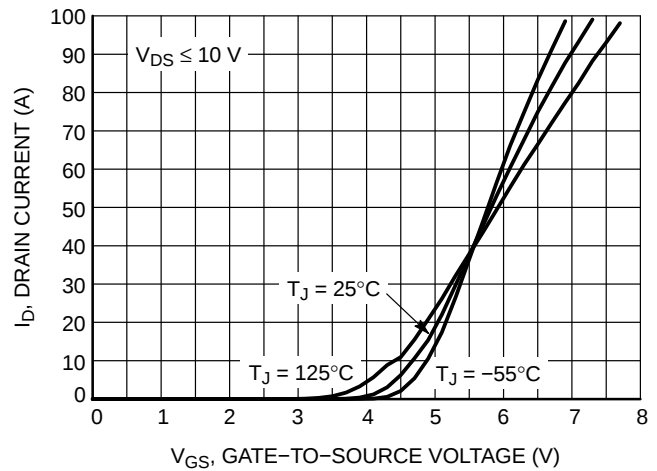


Figure 2. Transfer Characteristics

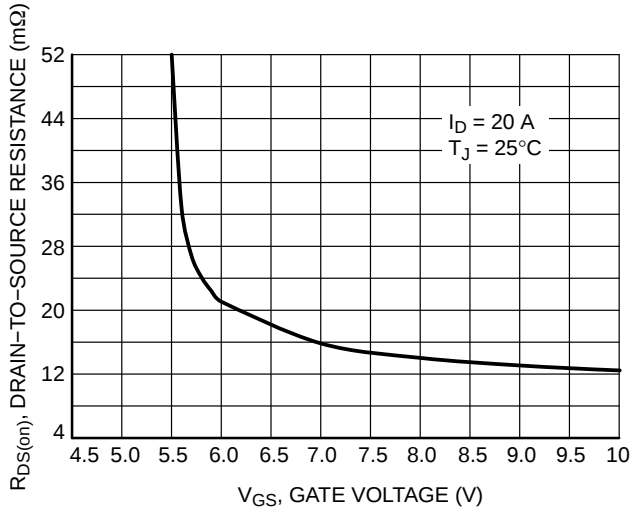


Figure 3. On-Resistance vs. Gate-to-Source Voltage

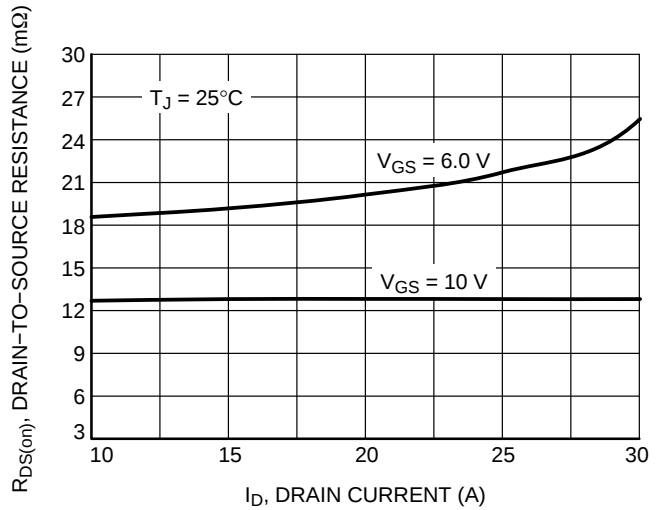


Figure 4. On-Resistance vs. Drain Current and Gate Voltage

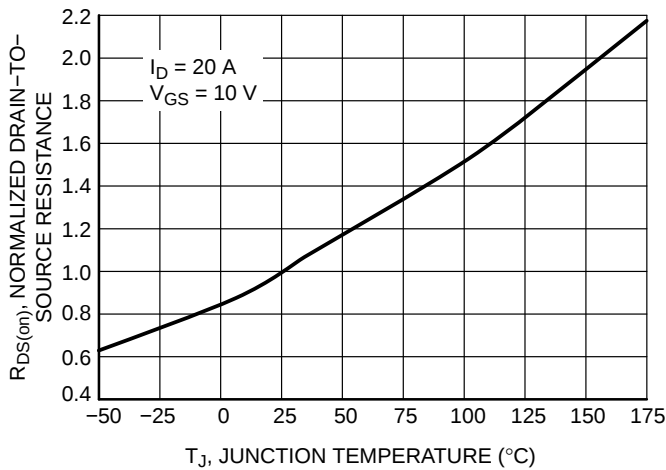


Figure 5. On-Resistance Variation with Temperature

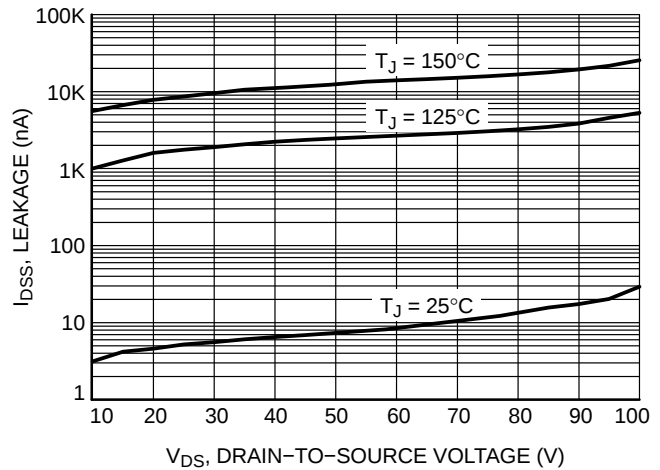


Figure 6. Drain-to-Source Leakage Current vs. Voltage

TYPICAL CHARACTERISTICS

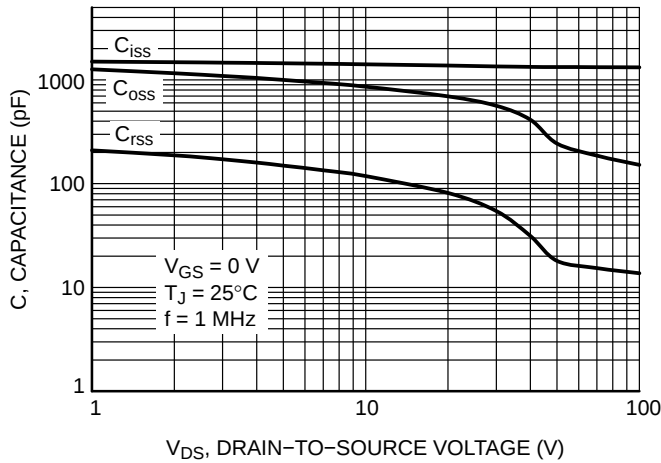


Figure 7. Capacitance Variation

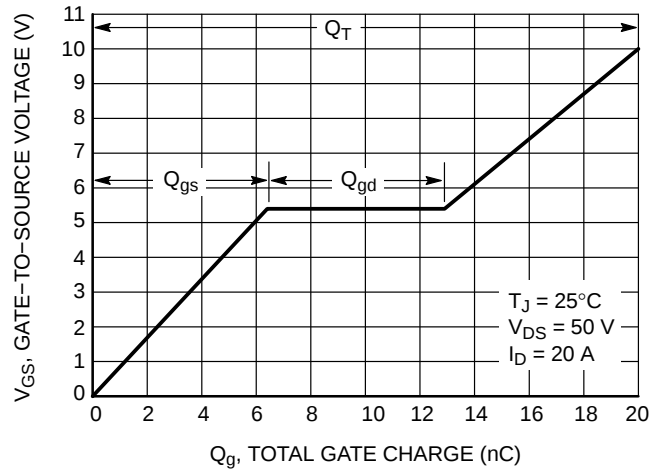


Figure 8. Gate-to-Source and Drain-to-Source Voltage vs. Total Charge

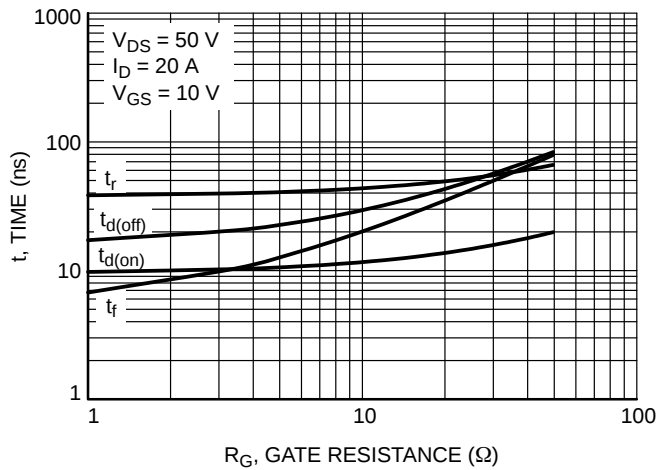


Figure 9. Resistive Switching Time Variation vs. Gate Resistance

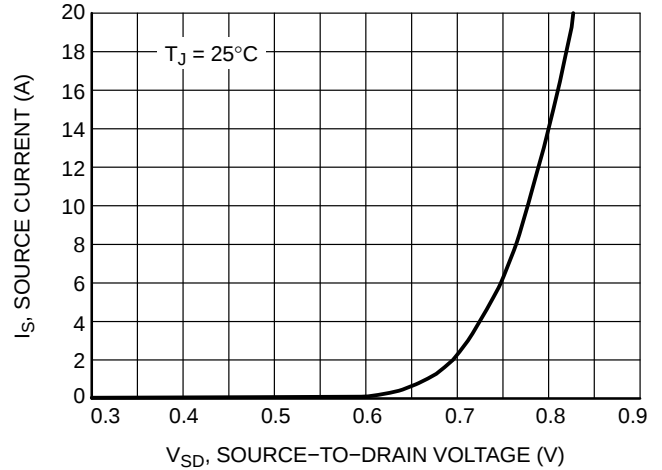


Figure 10. Diode Forward Voltage vs. Current

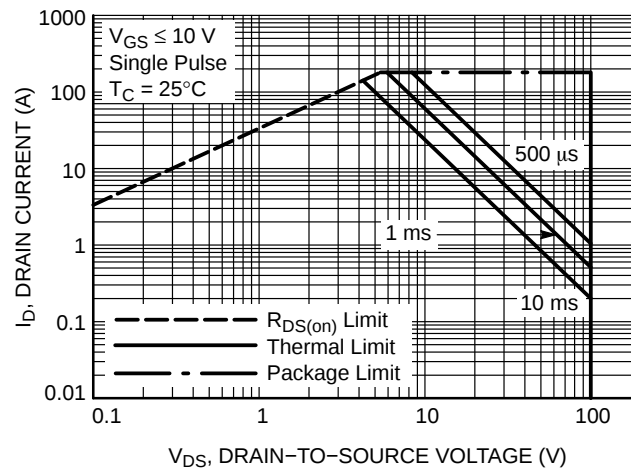


Figure 11. Maximum Rated Forward Biased Safe Operating Area

# NVMFS6B14N

## TYPICAL CHARACTERISTICS

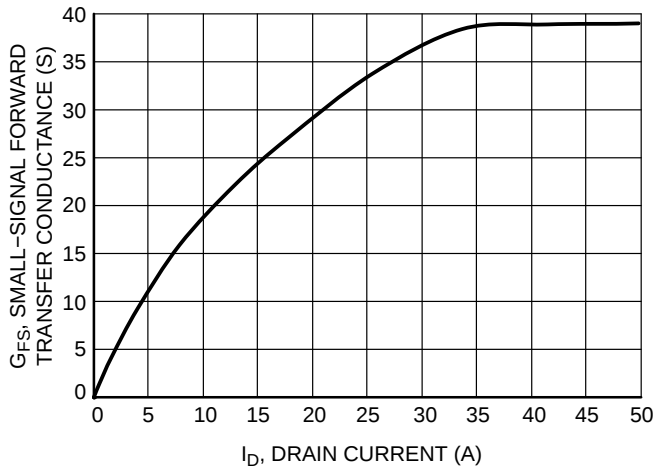


Figure 12.  $G_{FS}$  vs.  $I_D$

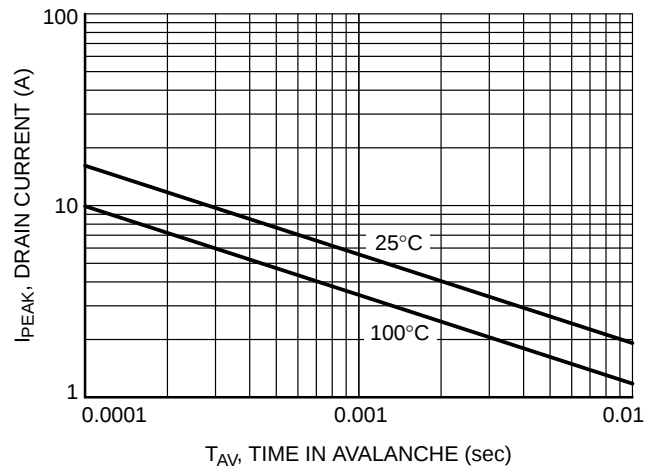


Figure 13.  $I_{PEAK}$  vs.  $T_{AV}$

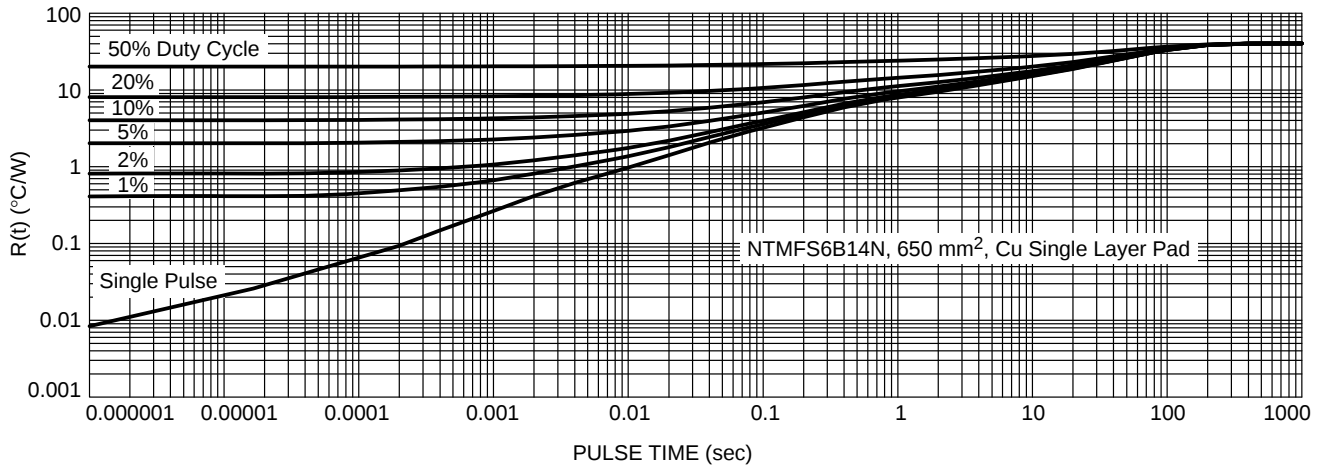


Figure 14. Thermal Response

### DEVICE ORDERING INFORMATION

| Device          | Marking | Package                            | Shipping <sup>†</sup> |
|-----------------|---------|------------------------------------|-----------------------|
| NVMFS6B14NT1G   | 6B14N   | DFN5<br>(Pb-Free)                  | 1500 / Tape & Reel    |
| NVMFS6B14NWFT1G | 6B14WF  | DFN5<br>(Pb-Free, Wettable Flanks) | 1500 / Tape & Reel    |
| NVMFS6B14NT3G   | 6B14N   | DFN5<br>(Pb-Free)                  | 5000 / Tape & Reel    |
| NVMFS6B14NWFT3G | 6B14WF  | DFN5<br>(Pb-Free, Wettable Flanks) | 5000 / Tape & Reel    |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

