

PD3068 Datasheet

Package Mechanical Drawings





a  MICROCHIP company

Microsemi Headquarters

One Enterprise, Aliso Viejo,
CA 92656 USA

Within the USA: +1 (800) 713-4113

Outside the USA: +1 (949) 380-6100

Sales: +1 (949) 380-6136

Fax: +1 (949) 215-4996

Email: sales.support@microsemi.com

www.microsemi.com

©2019 Microsemi, a wholly owned subsidiary of Microchip Technology Inc. All rights reserved. Microsemi and the Microsemi logo are registered trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.

About Microsemi

Microsemi, a wholly owned subsidiary of Microchip Technology Inc. (Nasdaq: MCHP), offers a comprehensive portfolio of semiconductor and system solutions for aerospace & defense, communications, data center and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; enterprise storage and communication solutions, security technologies and scalable anti-tamper products; Ethernet solutions; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Learn more at www.microsemi.com.

Contents

1	Revision History	1
1.1	Revision 62.0	1
1.2	Revision 61.0	1
1.3	Revision 60.0	1
1.4	Revision 59.0	1
1.5	Revision 58.0	1
1.6	Revision 57.0	1
1.7	Revision 56.0	1
1.8	Revision 55.0	2
1.9	Revision 54.0	2
1.10	Revision 53.0	2
1.11	Revision 52.0	2
1.12	Revision 51.0	2
1.13	Revision 50.0	2
1.14	Revision 49.0	2
1.15	Revision 48.0	2
1.16	Revision 47.0	2
1.17	Revision 46.0	2
1.18	Revision 45.0	3
1.19	Revision 44.0	3
1.20	Revision 43.0	3
1.21	Revision 42.0	3
1.22	Revision 41.0	3
1.23	Revision 40.0	3
1.24	Revision 39.0	4
1.25	Revision v11.4	4
1.26	Revision v11.3	4
1.27	Revision v11.2	4
1.28	Revision v11.1	5
1.29	Revision v11.0	5
1.30	Revision v10.9	5
1.31	Revision v10.8	5
1.32	Revision v10.7	5
1.33	Revision v10.6	5
1.34	Revision v10.5	5
1.35	Revision v10.4	6
1.36	Revision v10.3	6
1.37	Revision v10.2	6
1.38	Revision v10.1	6
1.39	Revision v10.0	6
1.40	Revision v9.9	6
1.41	Revision v9.8	6
2	Package Mechanical Drawings	7
2.1	Naming Conventions	7
2.2	CPGA	7

2.2.1	PG84	7
2.2.2	PG100	8
2.2.3	PG132	9
2.2.4	PG175	10
2.2.5	PG176	11
2.2.6	PG207	12
2.2.7	PG257	13
2.3	Ceramic Quad Flat Pack	14
2.3.1	CQ84	14
2.3.2	CQ84 Side View and Bottom View	15
2.3.3	CQ132, CQ172, CQ196, CQ208, CQ256, and CQ352—Cavity Up without Heat Sink	17
2.3.4	CQ208 and CQ256—Cavity Up with Heat Sink	21
2.3.5	CQ256—Cavity Down without Heat Sink	23
2.3.6	CQ256—Cavity Down with Heat Sink	25
2.3.7	CQFP without Heat Sink Dimensions	26
2.3.8	CQFP with Heat Sink Dimensions	27
2.4	CCLG	27
2.4.1	CC256	27
2.4.2	CCLG Substrate Dimensions	29
2.4.3	LG1657	29
2.5	CCGA	31
2.5.1	CG484	31
2.5.2	CG624	32
2.5.3	CG896	32
2.5.4	CCGA Dimensions	33
2.5.5	CG1152	34
2.5.6	CG1272	35
2.5.7	CG1657	36
2.6	PLCC	37
2.6.1	Plastic Leaded Chip Carrier Dimensions	38
2.7	QFN	38
2.7.1	QN48	38
2.7.2	QN68	39
2.7.3	QN48 and QN68 Quad Flat No Leads Single Row Dimension	40
2.8	Quad Flat No Lead	41
2.8.1	Quad Flat No Lead Details	42
2.8.2	QN108 Bottom View	43
2.8.3	QN132 Bottom View	44
2.8.4	QN180 Bottom View	45
2.8.5	Quad Flat No Leads Dimensions	46
2.9	Plastic Quad Flat Pack Rectangular Package (TQ144)	47
2.10	Plastic Quad Flat Pack (PQFP, TQFP, VQFP)	48
2.11	Plastic Quad Flat Pack—Exposed Heatsink (RQFP)	49
2.12	Plastic Quad Flat Pack Rectangular Package (PQ100)	50
2.12.1	PQFP Dimensions	52
2.12.2	Plastic Quad Flat Pack (RQFP/PQFP) Dimensions	53
2.12.3	TQFP Dimensions	54
2.12.4	VQFP Dimensions	55
2.13	PBGA	55
2.13.1	BG272	55
2.13.2	BG313	56
2.13.3	BG329	57
2.13.4	BG456	58
2.13.5	BG729	59
2.13.6	PBGA Dimensions	60
2.14	FBGA	61

2.14.1	FG144	61
2.14.2	FG256 MO-192 VAR DAF1	62
2.14.3	FG256 MS-034 VAR AAF-1	63
2.14.4	FG324	64
2.14.5	FG484 MS-034 VAR AAL-1	65
2.14.6	FG484—Fully Populated MS-034 VAR AAJ-1	66
2.14.7	FG676 (Option 1)	67
2.14.8	FG676 (Option 2)	68
2.14.9	FG676 (Option 1 and 2) Package Mechanical Drawing Dimensions	69
2.14.10	FG484—Fully Populated MS-034 VAR AAJ-1, Larger Mold Cap Size	70
2.14.11	FG896	71
2.14.12	FG896—Larger Mold Cap Size	71
2.14.13	FG1152	72
2.14.14	Fine Pitch Plastic Ball Grid Array Dimensions	73
2.14.15	FC1152	75
2.14.16	FCV484	76
2.14.17	FCV484 Package Mechanical Drawing Dimensions	77
2.14.18	FC1152 Package Mechanical Drawing Dimensions	78
2.15	Chip Scale Package (UC/CS/VF)	78
2.15.1	UC36	79
2.15.2	CS49	79
2.15.3	UC81	80
2.15.4	CS81	81
2.15.5	CS121	82
2.15.6	CS128	83
2.15.7	CS180	84
2.15.8	CS196	85
2.15.9	CS201	86
2.15.10	FCS325—(Option 1)	87
2.15.11	FCS325—(Option 2)	88
2.15.12	CS281	89
2.15.13	CS288	90
2.15.14	FCS536	91
2.15.15	CS289	92
2.15.16	Chip Scale Package Dimensions	93
2.15.17	VF256	95
2.16	Very Fine Pitch Ball Grid Array	96
2.16.1	VF400	96
2.16.2	Dimensions of VF400	97
2.16.3	Dimensions of VF256	98

Figures

Figure 1	Package Outline of PG84	8
Figure 2	Package Outline of PG100	9
Figure 3	Package Outline of PG132	10
Figure 4	Package Outline of PG175	11
Figure 5	Package Outline of PG176	12
Figure 6	Package Outline of PG207	13
Figure 7	Package Outline of PG257	14
Figure 8	Package Top View of CQ84	15
Figure 9	Bottom and Side Views of CQ84	16
Figure 10	CQ132, CQ172, CQ196, CQ208, CQ256, and CQ352—Cavity Up without Heat Sink	18
Figure 11	RTG4 CQ352—Cavity Up without Heat Sink: Top View	19
Figure 12	RTG4 CQ352—Cavity Up without Heat Sink: Bottom View	20
Figure 13	CQ208 and CQ256—Cavity Up with Heat Sink	22
Figure 14	CQ256—Cavity Down without Heat Sink	24
Figure 15	CQ256—Cavity Down with Heat Sink	25
Figure 16	Package Outline of CC256	28
Figure 17	CCLG Substrate Dimensions	29
Figure 18	Package Outline of LG1657	30
Figure 19	Package Outline of CG484	31
Figure 20	Package Outline of CG624	32
Figure 21	Package Outline of CG896	33
Figure 22	Package Outline of CG1152	34
Figure 23	Package Outline of CG1272	35
Figure 24	Package Outline of CG1657	36
Figure 25	PLCC	37
Figure 26	Package Outline of QN48	39
Figure 27	Package Outline of QN68	40
Figure 28	Quad Flat No Lead	42
Figure 29	Quad Flat No Lead Details	43
Figure 30	Bottom View of QN108	44
Figure 31	Bottom View of QN132	45
Figure 32	Bottom View of QN180	46
Figure 33	Plastic Quad Flat Pack Rectangular Package (TQ144)	48
Figure 34	Plastic Quad Flat Pack (PQFP, TQFP, VQFP)	49
Figure 35	Plastic Quad Flat Pack—Exposed Heatsink (RQFP)	50
Figure 36	Plastic Quad Flat Pack Rectangular Package (PQ100)	51
Figure 37	Package Outline of BG272	56
Figure 38	Package Outline of BG313	57
Figure 39	Package Outline of BG329	58
Figure 40	Package Outline of BG456	59
Figure 41	Package Outline of BG729	60
Figure 42	Package Outline of FG144	62
Figure 43	Package Outline of FG256 MO-192 VAR DAF1	63
Figure 44	Package Outline of FG256 MS-034 VAR AAF-1	64
Figure 45	Package Outline of FG324	65
Figure 46	Package Outline of FG484 MS-034 VAR AAL-1	66
Figure 47	Package Outline of FG484—Fully Populated MS-034 VAR AAJ-1	67
Figure 48	Package Outline of FG676 (Option 1)	68
Figure 49	Package Outline of FG676 (Option 2)	69
Figure 50	Package Outline of FG484 MS-034 VAR AAJ-1	70
Figure 51	Package Outline of FG896	71
Figure 52	Package Outline of FG896 Larger Mold Cap Size	72
Figure 53	Package Outline of FG1152	73
Figure 54	Package Outline of FC1152	76

Figure 55	Package Outline of FCV484	77
Figure 56	Package Outline of UC36	79
Figure 57	Package Outline of CS49	80
Figure 58	Package Outline of UC81	81
Figure 59	Package Outline of CS81	82
Figure 60	Package Outline of CS121	83
Figure 61	Package Outline of CS128	84
Figure 62	Package Outline of CS180	85
Figure 63	Package Outline of CS195	86
Figure 64	Package Outline of CS201	87
Figure 65	Package Outline of FCS325 (Option 1)	88
Figure 66	Package Outline of FCS325—(Option 2)	89
Figure 67	Package Outline of CS281	90
Figure 68	Package Outline of CS288	91
Figure 69	Package Outline of FCS536	92
Figure 70	Package Outline of CS289	93
Figure 71	Package Outline of VF256	96
Figure 72	Package Outline of VF400	97

Tables

Table 1	Package Naming Conventions	7
Table 2	Supported Devices for PG84	8
Table 3	Supported Devices for PG100	9
Table 4	Supported Devices for PG132	10
Table 5	Supported Devices for PG175	11
Table 6	Supported Devices for PG175	12
Table 7	Supported Devices for PG207	13
Table 8	Supported Devices for PG257	14
Table 9	Supported Devices for CQ84	16
Table 10	Plate Thickness for CQ84	16
Table 11	Lid Size for CQ84	17
Table 12	Supported Devices for CQ132, CQ172, CQ196, CQ208, CQ256, and CQ352	21
Table 13	Supported Devices for CQ208 and CQ256	23
Table 14	Supported Devices for CQ256	25
Table 15	Supported Devices for CQ256	26
Table 16	Dimensions for CQFP without Heat Sink	26
Table 17	Dimensions for CQFP with Heat Sink	27
Table 18	Supported Devices for CC256	28
Table 19	Supported Devices for LG1657	30
Table 20	Supported Devices for CG484	31
Table 21	Supported Devices for CG624	32
Table 22	Supported Devices for CG896	33
Table 23	Dimensions of CCGA	33
Table 24	Supported Devices for CG1152	35
Table 25	Supported Devices for CG1272	36
Table 26	Supported Devices for CG1657	37
Table 27	Supported Devices for PL44, PL68, and PL84	38
Table 28	Dimensions of Plastic Leaded Chip Carrier	38
Table 29	Supported Devices for QN48	39
Table 30	Supported Devices for QN68	40
Table 31	QN48 and QN68 Quad Flat No Leads Single Row Dimensions	40
Table 32	Supported Devices for QN108	44
Table 33	Supported Devices for QN132	45
Table 34	Supported Devices for QN180	46
Table 35	Dimensions of Quad Flat No Leads	46
Table 36	Dimensions for QN108, QN132, and QN180	47
Table 37	Supported Devices for Plastic Quad Flat Pack Rectangular Package	52
Table 38	PQFP Dimensions	52
Table 39	RQFP/PQFP Dimensions	53
Table 40	Supported Devices for Quad Slat (TQ/VQ)	54
Table 41	TQFP Dimensions	54
Table 42	VQFP Dimensions	55
Table 43	Supported Devices for BG272	56
Table 44	Supported Devices for BG313	57
Table 45	Supported Devices for BG329	58
Table 46	Supported Devices for BG456	59
Table 47	Supported Devices for BG729	60
Table 48	PBGA Dimensions	60
Table 49	Supported Devices for FG144	62
Table 50	Supported Devices for FG256 MO-192 VAR DAF1	63
Table 51	Supported Devices for FG256 MS-034 VAR AAF-1	64
Table 52	Supported Devices for FG324	65
Table 53	Supported Devices for FG484 MS-034 VAR AAL-1	66
Table 54	Supported Devices for FG484—Fully Populated MS-034 VAR AAJ-1	67

Table 55	Supported Devices for FG676 (Option 1)	68
Table 56	Supported Devices for FG676 (Option 2)	69
Table 57	Dimensions of FG676 (Option 1 and 2) Package Mechanical Drawing	69
Table 58	Supported Devices for FG484 MS-034 VAR AAJ-1	71
Table 59	Supported Devices for FG896	71
Table 60	Supported Devices for FG896 Larger Mold Cap Size	72
Table 61	Supported Devices for FG1152	73
Table 62	Fine Pitch Plastic Ball Grid Array Dimensions for FG144, FG256, and FG324	73
Table 63	Fine Pitch Plastic Ball Grid Array Dimensions for FG484	74
Table 64	Fine Pitch Plastic Ball Grid Array Dimensions for FG896 and FG1152	75
Table 65	Supported Devices for FC1152	76
Table 66	Supported Devices for FCV484	77
Table 67	FCV484 Package Mechanical Drawing Dimensions	77
Table 68	Dimensions of FC1152	78
Table 69	Supported Devices for UC36	79
Table 70	Supported Devices for CS49	80
Table 71	Supported Devices for UC81	81
Table 72	Supported Devices for CS81	82
Table 73	Supported Devices for CS121	83
Table 74	Supported Devices for CS128	84
Table 75	Supported Devices for CS180	85
Table 76	Supported Devices for CS196	86
Table 77	Supported Devices for CS201	87
Table 78	Supported Devices for FCS325 (Option 1)	88
Table 79	Supported Devices for FCS325 (Option 2)	89
Table 80	Supported Devices for CS281	90
Table 81	Supported Devices for CS288	91
Table 82	Supported Devices for FCS536	92
Table 83	Supported Devices for CS289	93
Table 84	Chip Scale Package Dimensions for UC36, CS49, UC81, and CS81	93
Table 85	Chip Scale Package Dimensions for CS121, CS128, CS180, CS196, and CS201	94
Table 86	Chip Scale Package Dimensions for FC325 and FC536	94
Table 87	Chip Scale Package Dimensions for FC325 and FC536	95
Table 88	Supported Devices for VF256	96
Table 89	Supported Devices for VS400	97
Table 90	Dimensions of VF400	97
Table 91	Dimensions of VF256	98

1 Revision History

The revision history describes the changes that were implemented in the document. The changes are listed by revision, starting with the most current publication.

1.1 Revision 62.0

Updated the [LG1657](#), page 29 bottom view diagram (SAR 78574).

1.2 Revision 61.0

The following is a summary of the changes in revision 61.0 of this document.

- Updated [CG1657](#), page 36 by removing C1 pin (SAR 94666).
- Updated [Figure 54](#), page 76 image (SAR 94196).
- Added RTG4 CQ352 package outline in the CQ132, CQ172, CQ196, CQ208, CQ256, and CQ352—Cavity Up without Heat Sink section. For more information, see [Figure 11](#), page 19.

1.3 Revision 60.0

The following is a summary of the changes in revision 60.0 of this document.

- Updated [CG1657](#), page 36 by removing C1 pin (SAR 78574).
- Updated [FG896](#), page 71 image (SAR 49423).
- Updated [Fine Pitch Plastic Ball Grid Array Dimensions](#), page 73 table for D2 and E2 options (SAR 49423).
- Updated [Fine Pitch Plastic Ball Grid Array Dimensions](#), page 73 table for in correct decimal values for A1 FG484 (SAR 51031).
- Removed Note in [Fine Pitch Plastic Ball Grid Array Dimensions](#), page 73 (SAR 58283).
- Updated CS325 to FCS325 and CS536 to FCS536 throughout the document (SAR 62909).
- Added CQ352 MO-134 VAR AE in [CQFP without Heat Sink Dimensions](#), page 26 (SAR 82812).
- Added note for [CQFP without Heat Sink Dimensions](#), page 26 (SAR 82812).

1.4 Revision 59.0

Updated the [FG676 \(Option 2\)](#), page 68 bottom view diagram for the corner pin balls (SAR 76003).

1.5 Revision 58.0

Updated the M2S060 and M2GL060 device details in the [FG676 \(Option 2\)](#), page 68, [FG484—Fully Populated MS-034 VAR AAJ-1, Larger Mold Cap Size](#), page 70, [FCS325—\(Option 1\)](#), page 87, and [VF400](#), page 96 (SAR 69566).

1.6 Revision 57.0

The following is a summary of the changes in revision 57.0 of this document.

- Updated [VF256](#), page 95 mechanical drawing (SAR 66875).
- Updated [Dimensions of VF400](#), page 97 (SAR 66875).
- Updated [FG484—Fully Populated MS-034 VAR AAJ-1, Larger Mold Cap Size](#), page 70 Package Mechanical Drawing Dimensions (SAR 64737).
- Removed RTAX4000D from [CG1272](#), page 35 support devices (SAR 66765).
- Added [CG1657](#), page 36 package and [LG1657](#), page 29 (SAR 66765).

1.7 Revision 56.0

Updated [FG676 \(Option 2\)](#), page 68 mechanical drawing (SAR 62340).

1.8 Revision 55.0

Added the mechanical drawing of the [Plastic Quad Flat Pack Rectangular Package \(TQ144\)](#), page 47 package. Removed the mechanical drawing of the VQ144 package and VQ144 Package Mechanical Drawing Dimensions. (SAR 61533).

1.9 Revision 54.0

Added the mechanical drawing of the [FCV484](#), page 76 package and [FCV484 Package Mechanical Drawing Dimensions](#), page 77 (SAR 54037).

1.10 Revision 53.0

Added the mechanical drawing of the [FCS536](#), page 91 package and "FCS536" Package Mechanical Drawing Dimensions (SAR 60514).

1.11 Revision 52.0

Updated the mechanical drawing of the [FCS325—\(Option 2\)](#), page 88 package and FCS325 (Option 2) Package Mechanical Drawing Dimensions (SAR 58504).

1.12 Revision 51.0

Corrected the reference device support for "VQ144" (SAR 58334).

1.13 Revision 50.0

Corrected the pitch (e) on the VQ144 from 0.05 BSC to 0.50 BSC in "Plastic Quad Flat Pack Rectangular Package (VQ144) Dimensions" section (SAR 57666).

1.14 Revision 49.0

The following is a summary of the changes in revision 49.0 of this document.

- Updated Note 2 and Note 3 for [CG1152](#), page 34 package outline drawing (SAR 55805).
- Updated Note 2 and Note 3 for [CCGA](#), page 31 package outline drawing (SAR 55805).
- Added note [QN180 Bottom View](#), page 45, "QN132 Bottom View" and "QN180 Bottom View" packages in the document (SAR 56846).
- Added "Plastic Quad Flat Pack Rectangular Package (VQ144)" package outline drawings and supported devices. Added "Plastic Quad Flat Pack Rectangular Package (VQ144) Dimensions" (SAR 53464).
- Renamed [FG676 \(Option 1\)](#), page 67 and [FG676 \(Option 2\)](#), page 68 (SAR 54063).
- Updated [FG676 \(Option 2\)](#), page 68 package outline drawing (SAR 55191).
- Updated the mechanical drawing of the [FCS325—\(Option 1\)](#), page 87 package and "FCS325 (Option 1)" Package Mechanical Drawing Dimensions (SAR 53464).
- Added [Chip Scale Package Dimensions](#), page 93 package outline drawing and added "FCS325 (Option 2)" Package Mechanical Drawing Dimensions (SAR 53464).
- Added [VF256](#), page 95 package outline drawing and also added [Dimensions of VF400](#), page 97 (SAR 53464).

1.15 Revision 48.0

Updated the mechanical drawing of [FG896—Larger Mold Cap Size](#), page 71 package (SAR 49607).

1.16 Revision 47.0

Added [FG676 \(Option 2\)](#), page 68, [FC1152](#), page 75, and [FCS325—\(Option 1\)](#), page 87 package outline drawings and supported devices (SAR 51485).

1.17 Revision 46.0

Updated the mechanical drawing of the [VF400](#), page 96 package (SAR 49374).

1.18 Revision 45.0

Updated the Supported Devices details for [FG484—Fully Populated MS-034 VAR AAJ-1](#), page 66, [FG896—Larger Mold Cap Size](#), page 71, and [VF400](#), page 96 (SAR 48235).

1.19 Revision 44.0

The following is a summary of the changes in revision 44.0 of this document.

- [Table 1](#), page 7 was updated to include the VFPBA package.
- The cross-reference to the [CQFP with Heat Sink Dimensions](#), page 27 dimensions table was corrected in the table notes for the [CQ208 and CQ256—Cavity Up with Heat Sink](#), page 21 section (SAR 44419).
- AGL250 was added as a supported device in the [CS81](#), page 81 section ([SAVF256_Package_Outline_Drawing R 43697](#)).
- The [VF400](#), page 96 is new (47028).

1.20 Revision 43.0

The following is a summary of the changes in revision 43.0 of this document.

- A2F060 was added as a supported device for "TQ144" (SAR 43622).
- The [FG484—Fully Populated MS-034 VAR AAJ-1](#), page 66 and [FG896—Larger Mold Cap Size](#), page 71 section are new. These packages are new for the SmartFusion2 family and differ from the existing FG484 and FG896 packages due to a larger mold cap and the pin gate feature, which prevents marking in the center of the package (SAR 42898).

1.21 Revision 42.0

Added new note in [Fine Pitch Plastic Ball Grid Array Dimensions](#), page 73 (SAR 35957).

1.22 Revision 41.0

Removed "RTSX72SU" from "CQ208" and "CQ256" columns in [Table 12](#), page 21 (SAR 32881).

1.23 Revision 40.0

The following is a summary of the changes in revision 40.0 of this document.

- [Table 1](#), page 7 was added. References to packages throughout the document were changed in conformance with the conventions (SAR 27395).
- The supported devices listings for the following packages were updated and corrected (SAR 27395):
 - [PG100](#), page 8 – Obsolete for 1415A
 - [PG175](#), page 10 – Obsolete for A1440A
 - [CQ84](#), page 14 – Obsolete for A32100DX
 - [CQ208 and CQ256—Cavity Up with Heat Sink](#), page 21 – Supported for AX250 and AX500 (SAR 26344)
 - [CQ208 and CQ256—Cavity Up with Heat Sink](#), page 21 – Supported for AX2000 (SAR 22918), RT3PE600L, and RT3PE3000L
 - "CQ352" – Supported for RTAX4000S (SAR 30672), RTAX2000D, and RTAX4000D
 - [CG624](#), page 32 – Supported for RTAX250S
 - [CG1152](#), page 34 – Supported for RTAX2000S, not RTAX4000S
 - [CCGA](#), page 31 – Supported for RTAX2000D and RTAX4000D
 - "PL84" – Obsolete for A3265A
 - "QN132" – Not supported for M1ASGL250 or M1A3P250
 - "PQ144" – Obsolete for A1240XL
 - "PQ208" – Not supported for M1A3PE600. Supported for A2F200 and A2F500 (SAR 31179)
 - "BG272" – Obsolete for A500K050 and A500K130
 - "FG256 MO-192 VAR DAF1" – Supported for M1AGL600
 - [FG484—Fully Populated MS-034 VAR AAJ-1](#), page 66 – Not supported for M1A3P600 or M1A3PE600
 - "CS49" – Obsolete for eX64 and eX128

- "CS128" – Obsolete for eX64, eX128, and eX256
- "CS180" – Obsolete for AX125 and eX256
- The lid size table for the [CQ84](#), page 14 package was updated to add dimensions for RT1020 (SAR 27395).
- The [CQ84 Side View and Bottom View](#), page 15 diagram was revised to add additional dimensions to the side view, noting the maximum distances between the lead and the top of the package (SAR 27406).
- Corrected the [CG484](#), page 31 diagram by removing the pin in the A1 position (SAR 30549).
- The [CG896](#), page 32 package drawing was corrected to show the chamfered corner is at A1 (SAR 30227).
- The [CG1152](#), page 34 and [CCGA](#), page 31 package drawings were revised to add the CLGA side view (SARs 29751, 30553).
- The [FG896](#), page 71 diagram was corrected to show the D1 dimension extends from pin 1 to pin 30. Previously the diagram showed that D1 extended from pin 1 to pin 29 (SAR 26792).
- The [FG1152](#), page 72 diagram was corrected to show the D1 dimension extends from pin 1 to pin 34. Previously the diagram showed that D1 extended from pin 1 to pin 33 (SAR 26792).
- In the [Fine Pitch Plastic Ball Grid Array Dimensions](#), page 73 table, dimension c for FG256 MO-192 VAR DAF1 was corrected to 0.4 to 0.6 mm. Previously it was 0.25 to 1.10 mm (SAR 28605).
- A second FG896 package was added to the [Fine Pitch Plastic Ball Grid Array Dimensions](#), page 73 table. It differs from the first FG896 package only in the D2 and E2 dimensions.
- The VF289 package name was changed back to [CS289](#), page 92 (SAR 27395).

1.24 Revision 39.0

The following is a summary of the changes in revision 39.0 of this document.

- The versioning system has been changed. This document is assigned a revision number that increments each time the document is updated.
- SmartFusion devices A2F060, A2F200, and A2F500 were added to the supported devices table for the [FG256 MO-192 VAR DAF1](#), page 62 and [Fine Pitch Plastic Ball Grid Array Dimensions](#), page 73 (SAR 25571).
- SmartFusion devices A2F200 and A2F500 were added to the supported devices table for the [FG484—Fully Populated MS-034 VAR AAJ-1](#), page 66 [Fine Pitch Plastic Ball Grid Array Dimensions](#), page 73 (SAR 25571).
- The following package names were changed:
 - 36-Pin CSP was changed to [UC36](#), page 79
 - 289-Pin CSP was changed to [CS289](#), page 92
- The side views in the following [Chip Scale Package \(UC/CS/VF\)](#), page 78 drawings were corrected to show half sphere bumps instead of solder balls (SAR 26665):
 - [UC36](#), page 79
 - [UC81](#), page 80
 - [CS81](#), page 81
- The [CS281](#), page 89 [Chip Scale Package \(UC/CS/VF\)](#), page 78 section is new (SAR 27106).
- The A1 dimension values were changed to 0.07 REF in the [Chip Scale Package Dimensions](#), page 93 for [UC36](#), page 79, [UC81](#), page 80, and [CS81](#), page 81 (SAR 26432). The c dimension values were changed to 0.21 REF. The text, "MO-195, Variation AB," was deleted from the heading for these two packages. The b dimension values for the [CS81](#), page 81 package were revised.

1.25 Revision v11.4

The "CCGA Dimensions" table was updated. The D1 and E1 dimensions for CG484 were changed from 22.00 to 21 (SAR 22814).

1.26 Revision v11.3

Updated dimension for FBGA 144 package in the [Fine Pitch Plastic Ball Grid Array Dimensions](#), page 73 table.

1.27 Revision v11.2

A54SX16 was removed from the [CQ256—Cavity Down with Heat Sink](#), page 25.

1.28 Revision v11.1

The following is a summary of the changes in revision v11.1 of this document.

- The ccc specification was changed from 0.10 to 0.08 in the [Plastic Quad Flat Pack \(RQFP/PQFP\) Dimensions](#), page 53 table.
- The ccc specification was changed from 0.10 to 0.08 for the TQFP 167 in the [TQFP Dimensions](#), page 54 table.
- The ccc specification was changed from 0.10 to 0.08 for the CSP 289 in the [Chip Scale Package Dimensions](#), page 93 table.
- In the [Fine Pitch Plastic Ball Grid Array Dimensions](#), page 73 table, the following specs were updated for the [FG256 MO-192 VAR DAF1](#), page 62:A, A1, and c.

1.29 Revision v11.0

The following is a summary of the changes in revision v11.0 of this document.

- The document has been updated to include IGLOO nano packages.
- The "QN48" section is new.
- The [UC36](#), page 79 section is new.

1.30 Revision v10.9

The AGL400 device is new and has been added to [FG144](#), page 61, [FG256 MO-192 VAR DAF1](#), page 62, [FG484—Fully Populated MS-034 VAR AAJ-1](#), page 66, and [CS196](#), page 85.

1.31 Revision v10.8

The following is a summary of the changes in revision v10.8 of this document.

- The [CG484](#), page 31 section is new.
- The [CG896](#), page 32 is new.
- Data for the 484 and 896 CCGA/LGA packages was added to the [Table 23](#), page 33.
- In the [Table 35](#), page 46, "d" was deleted.

1.32 Revision v10.7

The following is a summary of the changes in revision v10.7 of this document.

- "VQ128" and "VQ176" were added to the VQFP "Supported Devices" table.
- "VQ128 MS-026 VAR AEE3" and "VQ176 MS-026 VAR BFC" dimension data are new.

1.33 Revision v10.6

The following is a summary of the changes in revision v10.6 of this document.

- A3PE600L was added to the supported devices table of the [FG484—Fully Populated MS-034 VAR AAJ-1](#), page 66 package.
- The following specifications have been updated for the [FG256 MO-192 VAR DAF1](#), page 62:
 - Dimension New Data
 - A1.80
 - A10.35 and 0.45
 - c0.35 and 0.60

1.34 Revision v10.5

The following is a summary of the changes in revision v10.5 of this document.

- bbb has been removed from all chip scale package drawings.
- The Detail A circle on the side view was added to the [CS288](#), page 90 package drawing.
- The [CS289](#), page 92 information is new.

1.35 Revision v10.4

Note 2 under the [QFN](#), page 38 package drawing is new and bottom view has been removed from the heading.

1.36 Revision v10.3

The following is a summary of the changes in revision v10.3 of this document.

- The note under the [QN108 Bottom View](#), page 43 package drawing is new.
- The note under the [QN132 Bottom View](#), page 44 package drawing is new. The figure was also updated to include D1 to D4.
- The note under the [QN180 Bottom View](#), page 45 package drawing is new. The figure was also updated to include D1 to D4.

1.37 Revision v10.2

M1A3P250L was deleted; it is no longer supported.

1.38 Revision v10.1

In Detail A, the A1 top arrow was incorrectly placed. It was originally at the top of the substrate and it has been moved to the bottom of the substrate in.

1.39 Revision v10.0

The following is a summary of the changes in revision v10.0 of this document.

- In the [CC256](#), page 27 figure, one of the side view dimensions was updated from 0.45 ± 0.05 to 0.254 ± 0.025 .
- The [CS201](#), page 86 section is new.
- In the [CS288](#), page 90 supported devices, the AGLP125 was added to the table.
- In the [Chip Scale Package Dimensions](#), page 93 table, several CS package dimensions were updated and the CS201 information is new. Please review carefully.

1.40 Revision v9.9

The Ø symbol was missing from all CCGA, PBGA, FBGA, and CSP figures. It has been added back into the document.

1.41 Revision v9.8

The [QFN](#), page 38 section, which includes the mechanical drawings and dimension measurements, is new.

2 Package Mechanical Drawings

2.1 Naming Conventions

This document lists all the package types used for Microsemi FPGAs and provides detailed drawings and dimensions. The following table lists the package types, their acronyms, and the naming convention used when referring to a package of that type with a particular pin count.

Table 1 • Package Naming Conventions

Package Type	Package Name	Acronym	Package/Pin Naming Convention (example)
Ceramic Packages	Ceramic Pin Grid Array	CPGA	PG84
	Ceramic Quad Flat Pack	CQFP	CQ208
	Ceramic Chip Carrier Land Grid Substrate	CCLG	CC256
	Ceramic Column Grid Array	CCGA	CG484
	Ceramic Land Grid Array	CLGA	LG484
Plastic Packages (leadframe-based, peripheral leads)	Quad Flat No Lead	QFN	QN48
	Plastic Quad Flat Pack	PQFP	PQ208
	Thin Quad Flat Pack	TQFP	TQ144
	Very Thin Quad Flat Pack	VQFP	VQ176
	Plastic Quad Flat Pack (exposed heatsink)	RQFP	RQ208
	Plastic Leaded Chip Carrier	PLCC	PL44
Plastic Packages (substrate-based, area array pins)	Plastic Ball Grid Array (PBGA) (1.27 mm pitch)	PBGA	BG272
	Fine pitch plastic ball grid array (FBGA) (1.00 mm pitch)	FBGA	FG144
	Chip Scale Package (0.50 mm pitch)	CSP	CS81
	Chip Scale Package (0.80 mm pitch) ¹	CSP	CS49
	Micro Chip Scale Package	UCS	UC36
	Very Fine Ball Pitch Grid Array	VFPBA	VF400

1. Currently the CS49, CS128, CS180, and CS289 packages are 0.80 mm pitch rather than 0.50 mm pitch.

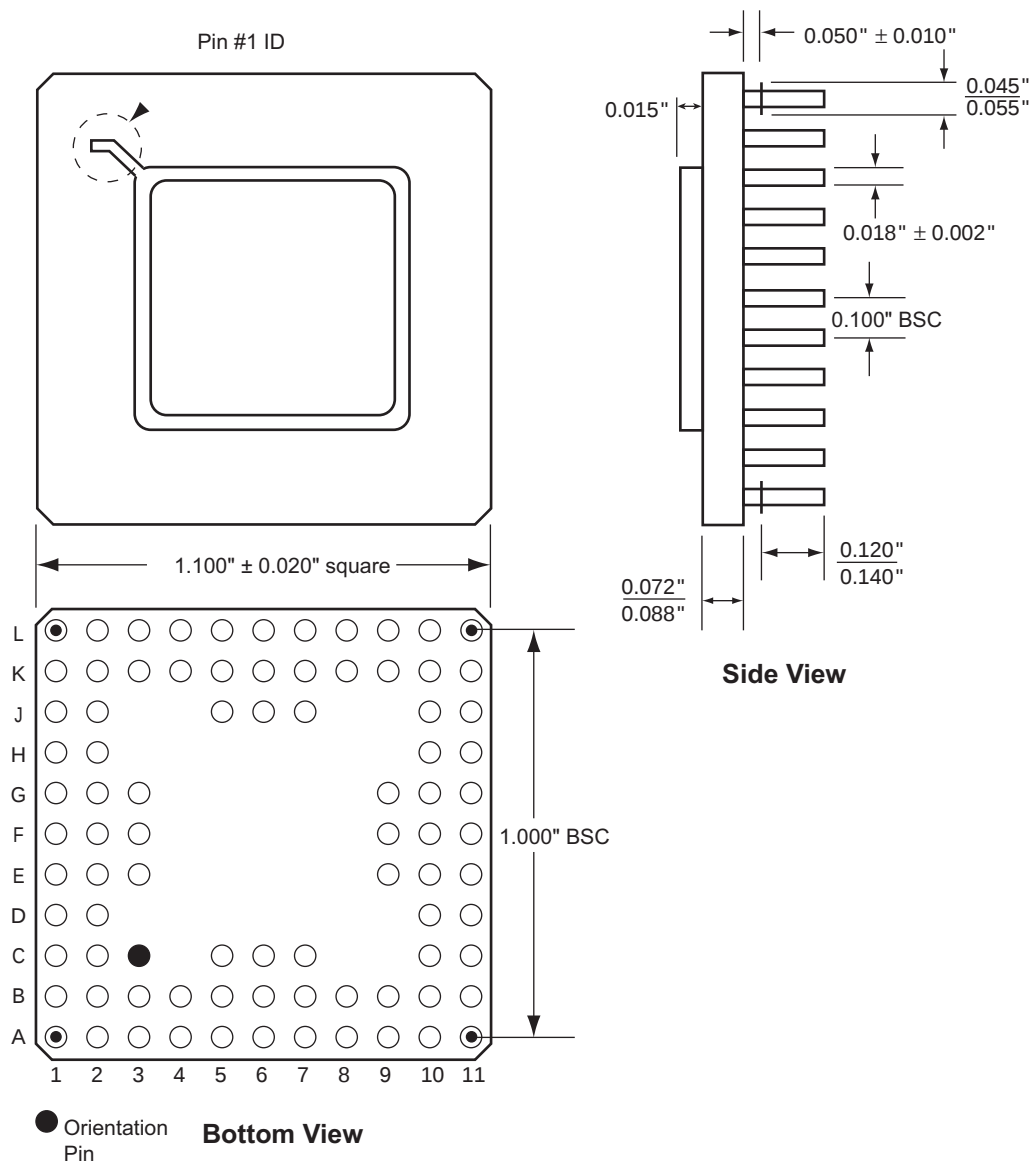
2.2 CPGA

The following figures show package outlines for various packages under ceramic pin grid array (CPGA).

2.2.1 PG84

The following figure shows the package outline of PG84.

Figure 1 • Package Outline of PG84
Top View



Note: All dimensions are in inches unless otherwise stated.

Note: BSC = Basic spacing between centers.

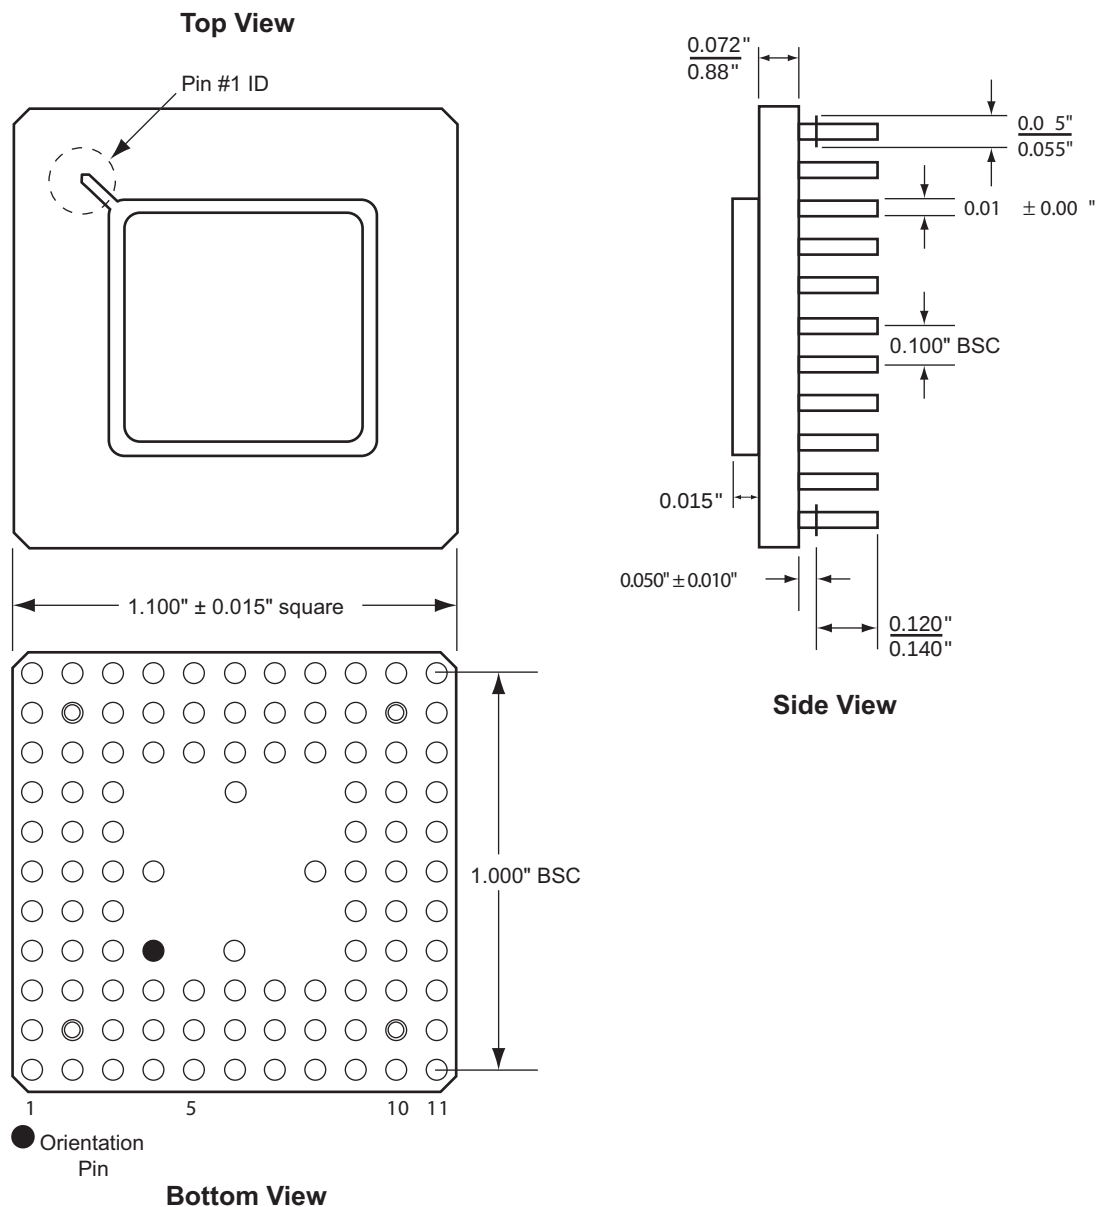
The following table shows the supported devices for PG84.

Table 2 • Supported Devices for PG84

Supported Devices	
A1010B	A1020B

2.2.2 PG100

The following figure shows the package outline of PG100.

Figure 2 • Package Outline of PG100

Note: All dimensions are in inches unless otherwise stated.

Note: BSC = Basic spacing between centers.

The following table lists the supported devices for PG100.

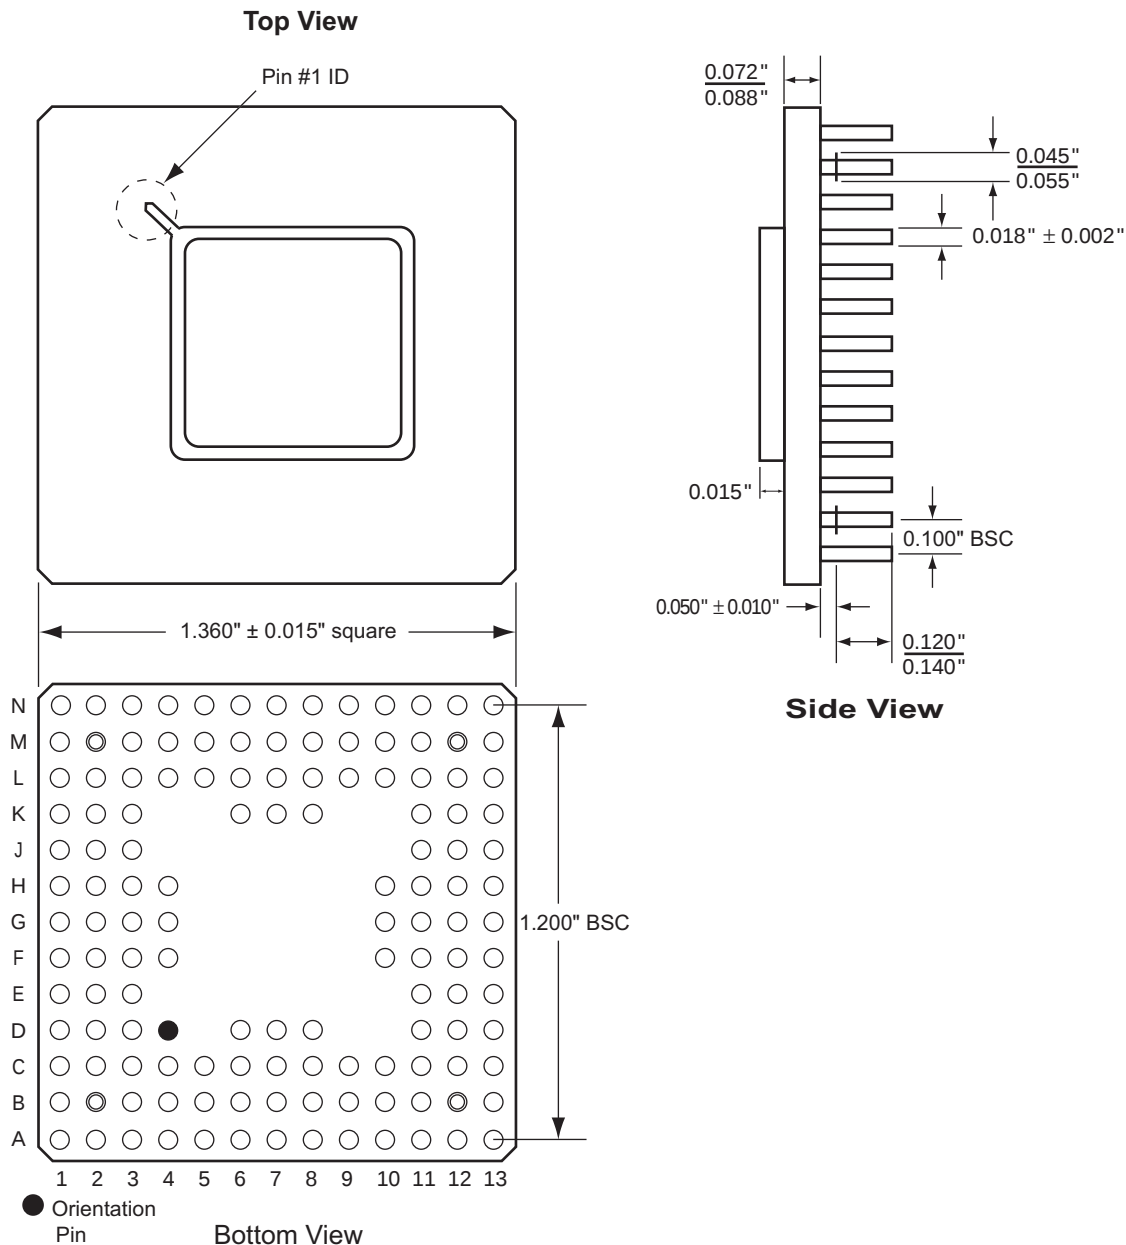
Table 3 • Supported Devices for PG100

Supported Devices	
A1225XL ¹	A1415A ¹

1. This product is obsolete.

2.2.3 PG132

The following figure shows the package outline of PG132.

Figure 3 • Package Outline of PG132

Note: All dimensions are in inches unless otherwise stated.

Note: BSC = Basic spacing between centers.

The following table lists the supported devices for PG132.

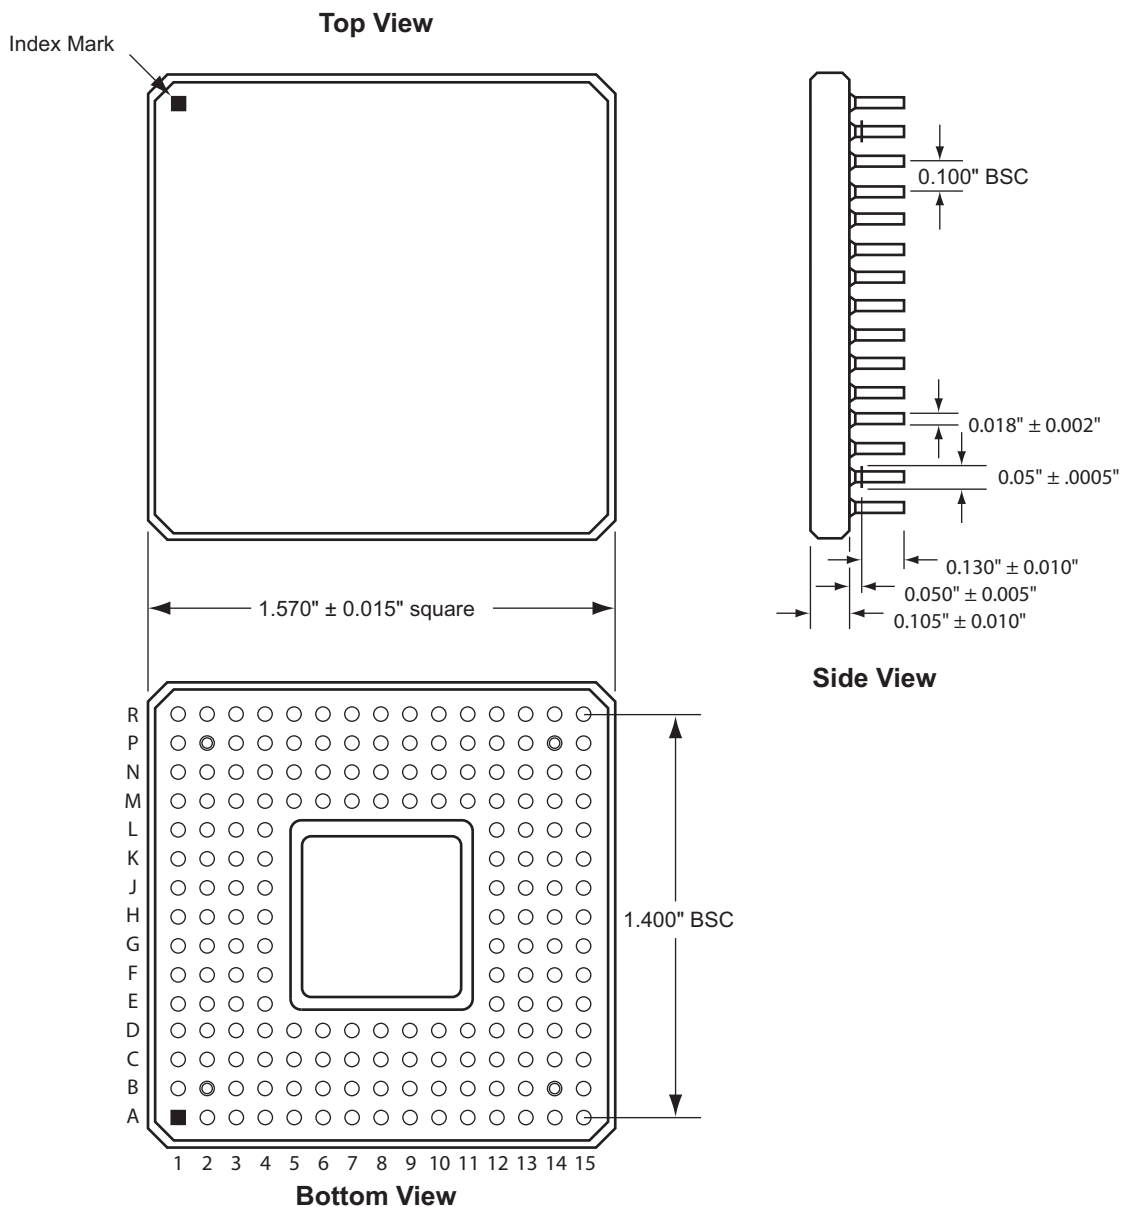
Table 4 • Supported Devices for PG132

Supported Devices	
A1240A	A1240XL*

Note: *This product is obsolete.

2.2.4 PG175

The following figure shows the package outline of PG175.

Figure 4 • Package Outline of PG175

Note: All dimensions are in inches unless otherwise stated.

Note: BSC = Basic spacing between centers.

The following table lists the supported devices for PG175.

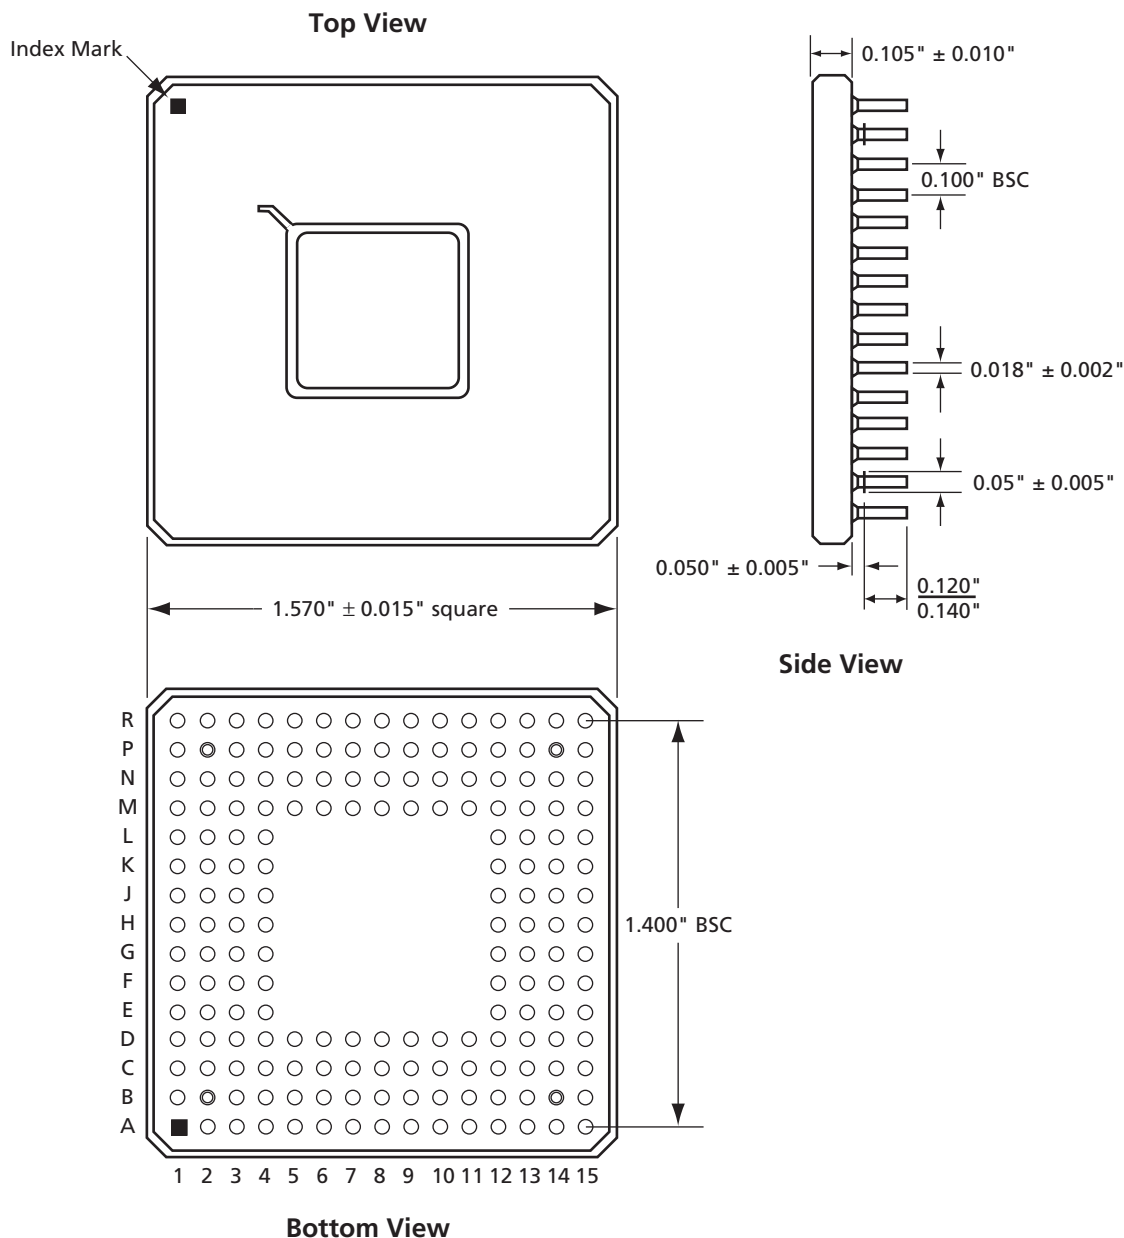
Table 5 • Supported Devices for PG175

Supported Devices
A1440A ¹

1. This product is obsolete.

2.2.5 PG176

The following figure shows the package outline of PG176.

Figure 5 • Package Outline of PG176

Note: All dimensions are in inches unless otherwise stated.

Note: BSC = Basic spacing between centers.

The following table lists the supported devices for PG176.

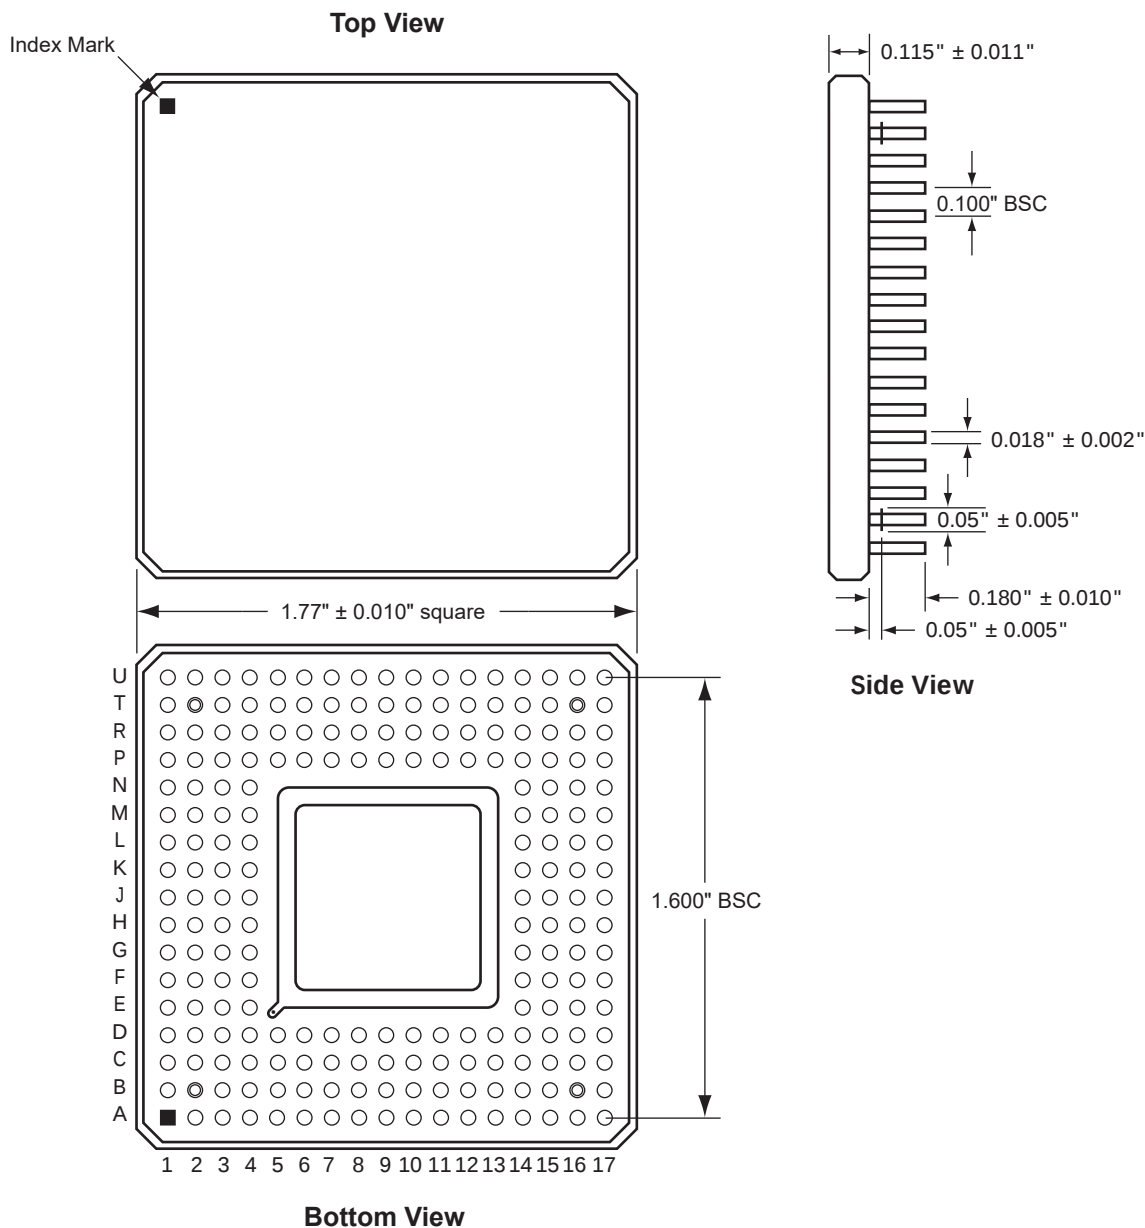
Table 6 • Supported Devices for PG175

Supported Devices	
A1280A	A1280XL ¹

1. This product is obsolete.

2.2.6 PG207

The following figure shows the package outline of PG207.

Figure 6 • Package Outline of PG207

Note: All dimensions are in inches unless otherwise stated.

Note: BSC = Basic spacing between centers.

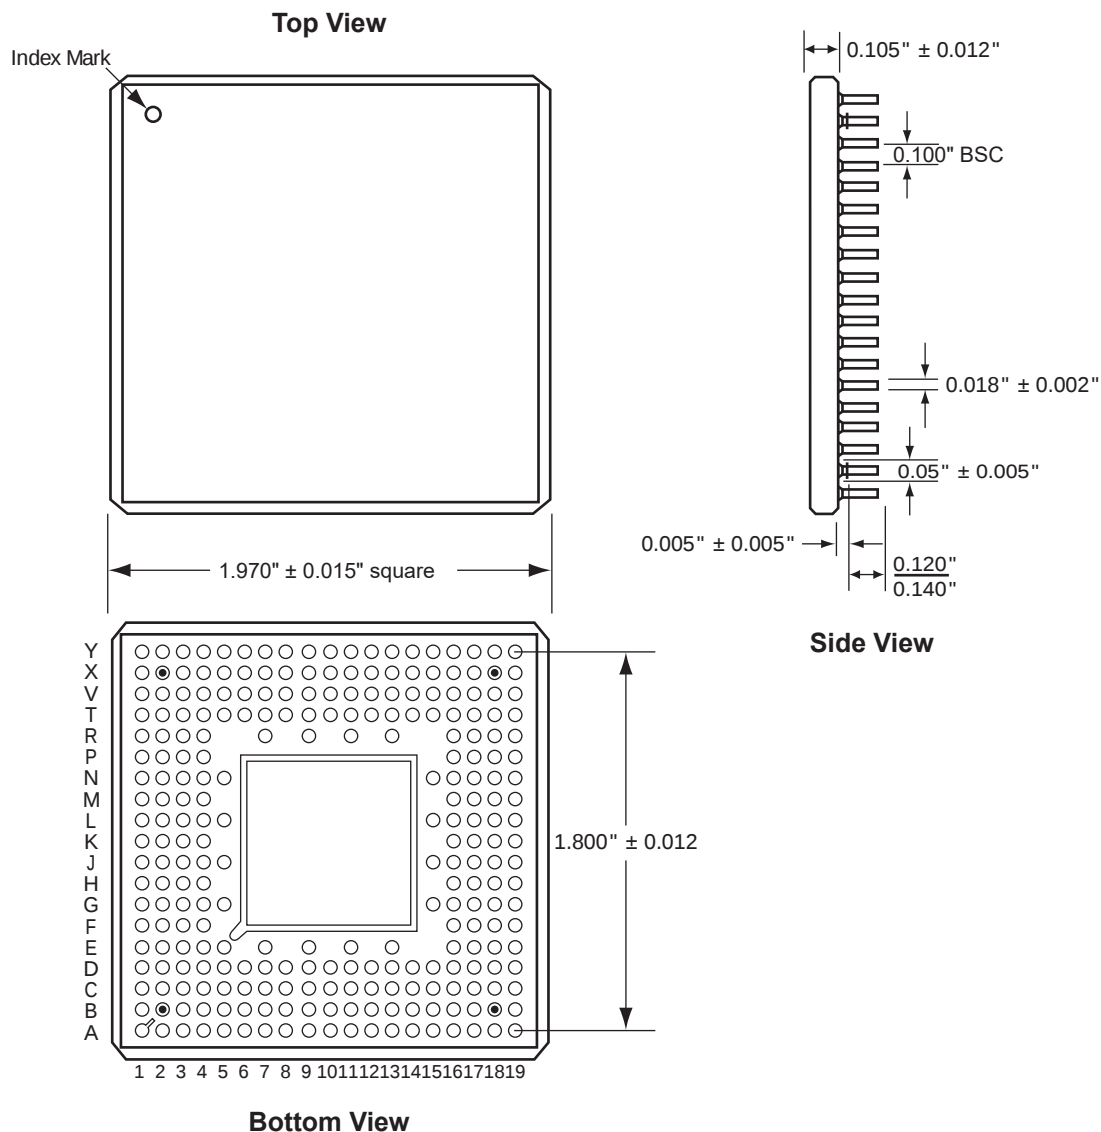
The following table lists the supported devices for PG207.

Table 7 • Supported Devices for PG207

Supported Devices
A1460A

2.2.7 PG257

The following figure shows the package outline of PG257.

Figure 7 • Package Outline of PG257

Note: All dimensions are in inches unless otherwise stated.

Note: BSC = Basic spacing between centers.

The following table lists the supported devices for PG257.

Table 8 • Supported Devices for PG257

Supported Devices
A14100A

2.3 Ceramic Quad Flat Pack

The following figures show package outlines for various packages under ceramic quad flat pack (CQFP).

2.3.1 CQ84

The following figure shows the package outline of CQ84.

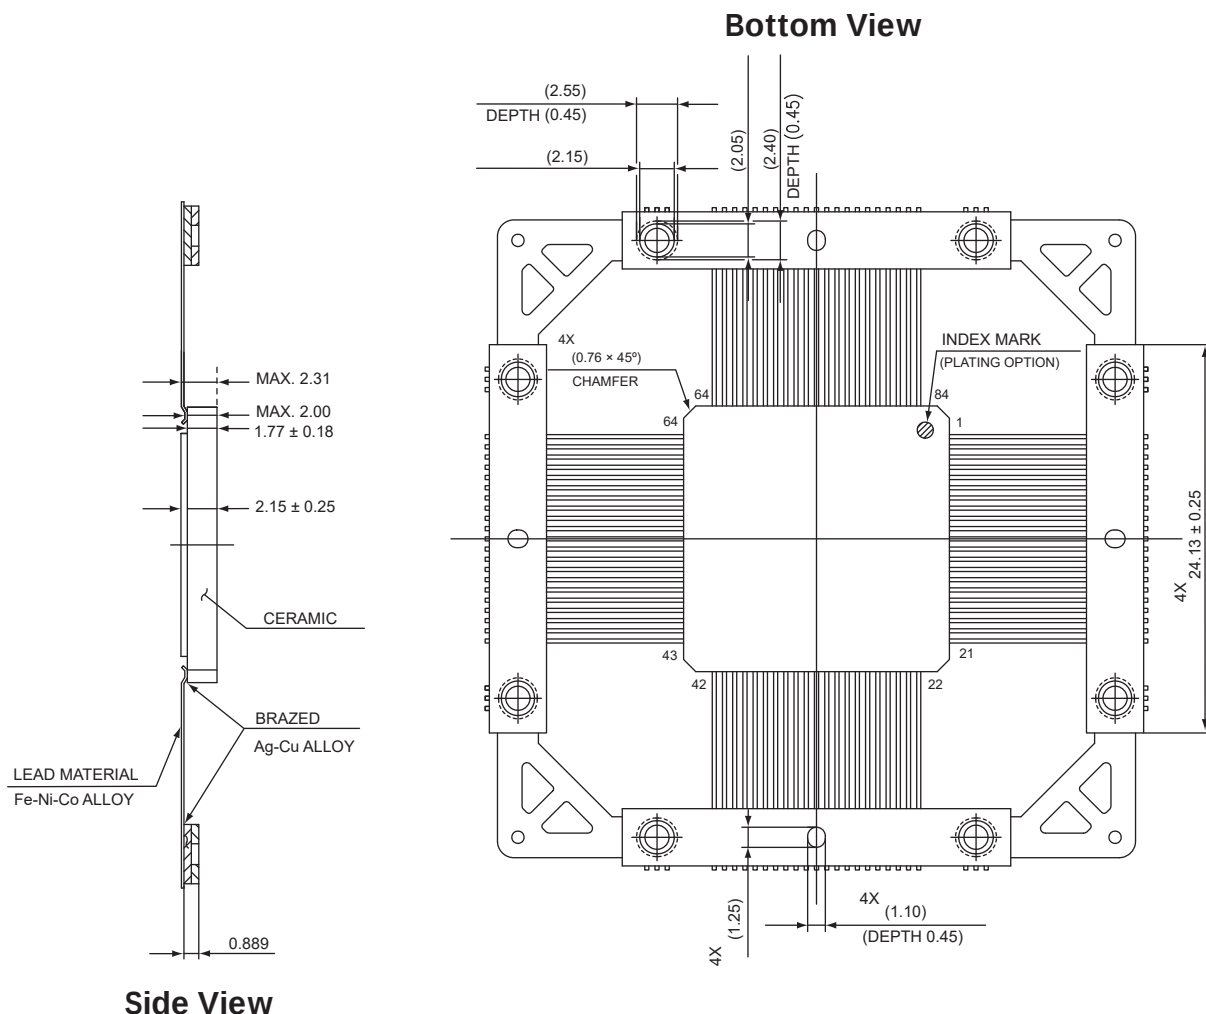
Top View

Note: LID and die attach area must be connected to ground (GND).

2.3.2 CQ84 Side View and Bottom View

The following figure shows the package outline of CQ84.

Figure 9 • Bottom and Side Views of CQ84



Side View

Note: Units are in mm.

Note: LID and die attach area must be connected to ground (GND).

The following table shows the supported devices for CQ84.

Table 9 • Supported Devices for CQ84

Supported Devices	
A1020B	RT1020 ¹
A32100DX ¹	RH1020 ¹
A54SX32A	RT54SX32S ¹ , RTSX32SU

1. *This product is obsolete.*

Table 10 • Plate Thickness for CQ84

Plate Thickness	
Ni Plating	2.03~8.89 micron
Au Plating	2.54 micron min.

Table 11 • Lid Size for CQ84

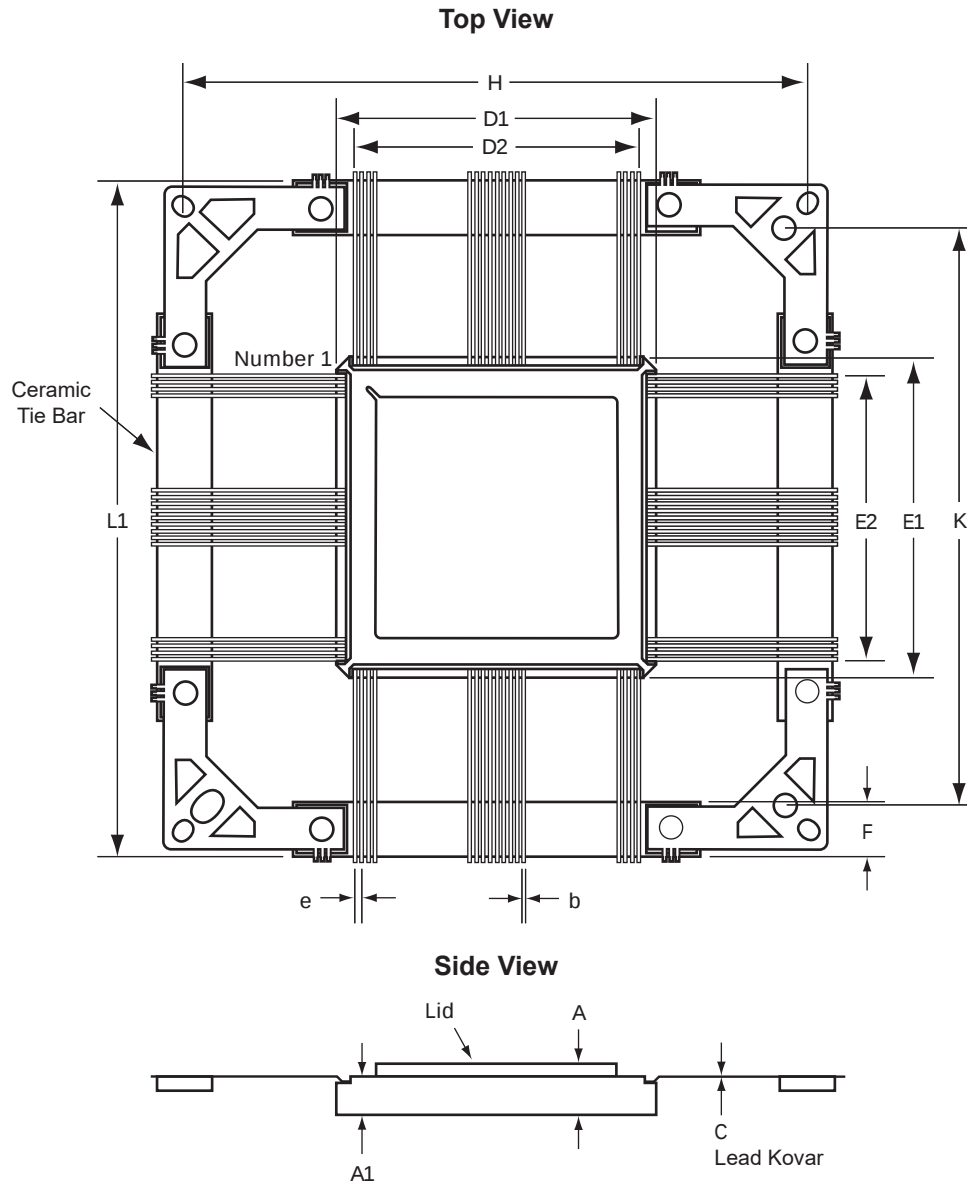
Lid Size	A	B
A1020B	13.21	13.21
A32100DX ¹	13.97	13.97
A54SX32A	13.21	13.21
RH1020*	13.21	13.21
RT1020 ¹	13.21	13.21
RT54SX32S ¹ , RTSX32SU	10.54	13.61

1. This product is obsolete.

2.3.3 CQ132, CQ172, CQ196, CQ208, CQ256, and CQ352—Cavity Up without Heat Sink

The following figure shows the dimensions, top view, and, side view of CQ132, CQ172, CQ196, CQ208, CQ256, and CQ352—cavity up devices without heat sink.

Figure 10 • CQ132, CQ172, CQ196, CQ208, CQ256, and CQ352—Cavity Up without Heat Sink



The following figure shows the dimensions, top view, and side view of RTG4 CQ352—cavity up devices without heat sink.

[illegible]

19

Technical drawing of a rectangular plate with dimensions and annotations. The drawing includes a central rectangular area with a grid of lines. The plate is surrounded by a border with various dimensions and annotations. Key dimensions include:

- Overall width: 32.95 (4X)
- Overall height: 32.95 (4X)
- Inner width: 26.4 (8X 4.35)
- Inner height: 26.4 (8X 4.35)
- Top edge dimensions: 4X (1.27), 4X (1.09) (DEPTH 0.445), 4X (4.04)
- Right edge dimensions: 8X (2.54) (DEPTH 0.445), 8X (2.16), 8X (2.03), 8X (2.41) (DEPTH 0.445)
- Bottom edge dimensions: 2X 4.50, 8X (6.85)
- Left edge dimensions: 2X 2.05
- Annotations: INDEX MARK (BLACK ALUMINA COAT), 4X VENDOR'S OPTION, SEE DETAIL b, D, E

Note: Packages are shipped with the uniform ceramic tie bar in a test carrier.

The following table shows the supported devices for supported devices for CQ132, CQ172, CQ196, CQ208, CQ256, and CQ352.

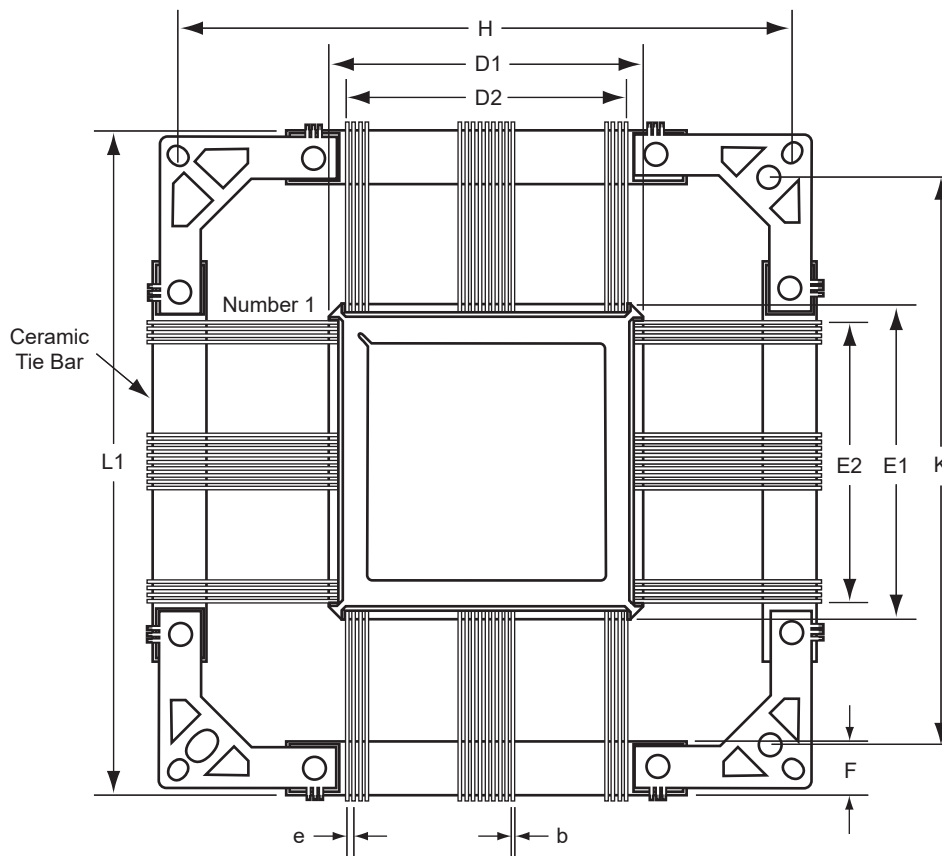
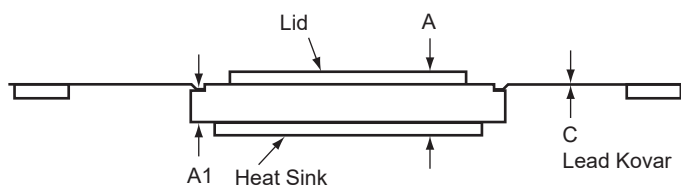
Table 12 • Supported Devices for CQ132, CQ172, CQ196, CQ208, CQ256, and CQ352

Supported Devices					
CQ132	CQ172	CQ196	CQ208	CQ256	CQ352
A1425A	A1280A	A1460A	A42MX36	A14100A	AX250
RT1425A	RH1280 ¹	RT1460A	AX250	AX2000	AX500
	RT1280A		AX500	A54SX32A	AX1000
			A54SX16	A54SX72A	AX2000
			A54SX32	RT14100A	APA300
			A54SX32A	RT54SX32S ¹	APA600
			A54SX72A	RTSX32SU	APA1000
			APA300	RTAX2000S	RTAX250S
			APA600	RT3PE600L	RTAX1000S
			APA1000	RT3PE3000L	RTAX2000S
			RT54SX32S ¹		RTAX4000S
			RTSX32SU		RTAX2000D
			RTAX250S		RTAX4000D

1. This product is obsolete.

2.3.4 CQ208 and CQ256—Cavity Up with Heat Sink

The following figure shows the dimension of the CQ208 and CQ256—cavity up with heat sink.

Figure 13 • CQ208 and CQ256—Cavity Up with Heat Sink**Top View****Side View**

Note: All dimensions are in inches except for CQ208, CQ256, and CQ352, which are in millimeters. For more information on dimensions, see [CQFP with Heat Sink Dimensions](#), page 27.

Note: Outside lead frame holes (from dimension H) are circular for the CQ208, CQ256, and CQ352 devices..

Note: Seal ring and lid are connected to Ground.

Note: Lead material is Kovar with minimum of 60 microinches gold over nickel.

Note: Packages are shipped with the uniform ceramic tie bar.

The following table shows the supported devices for CQ208 and CQ256.

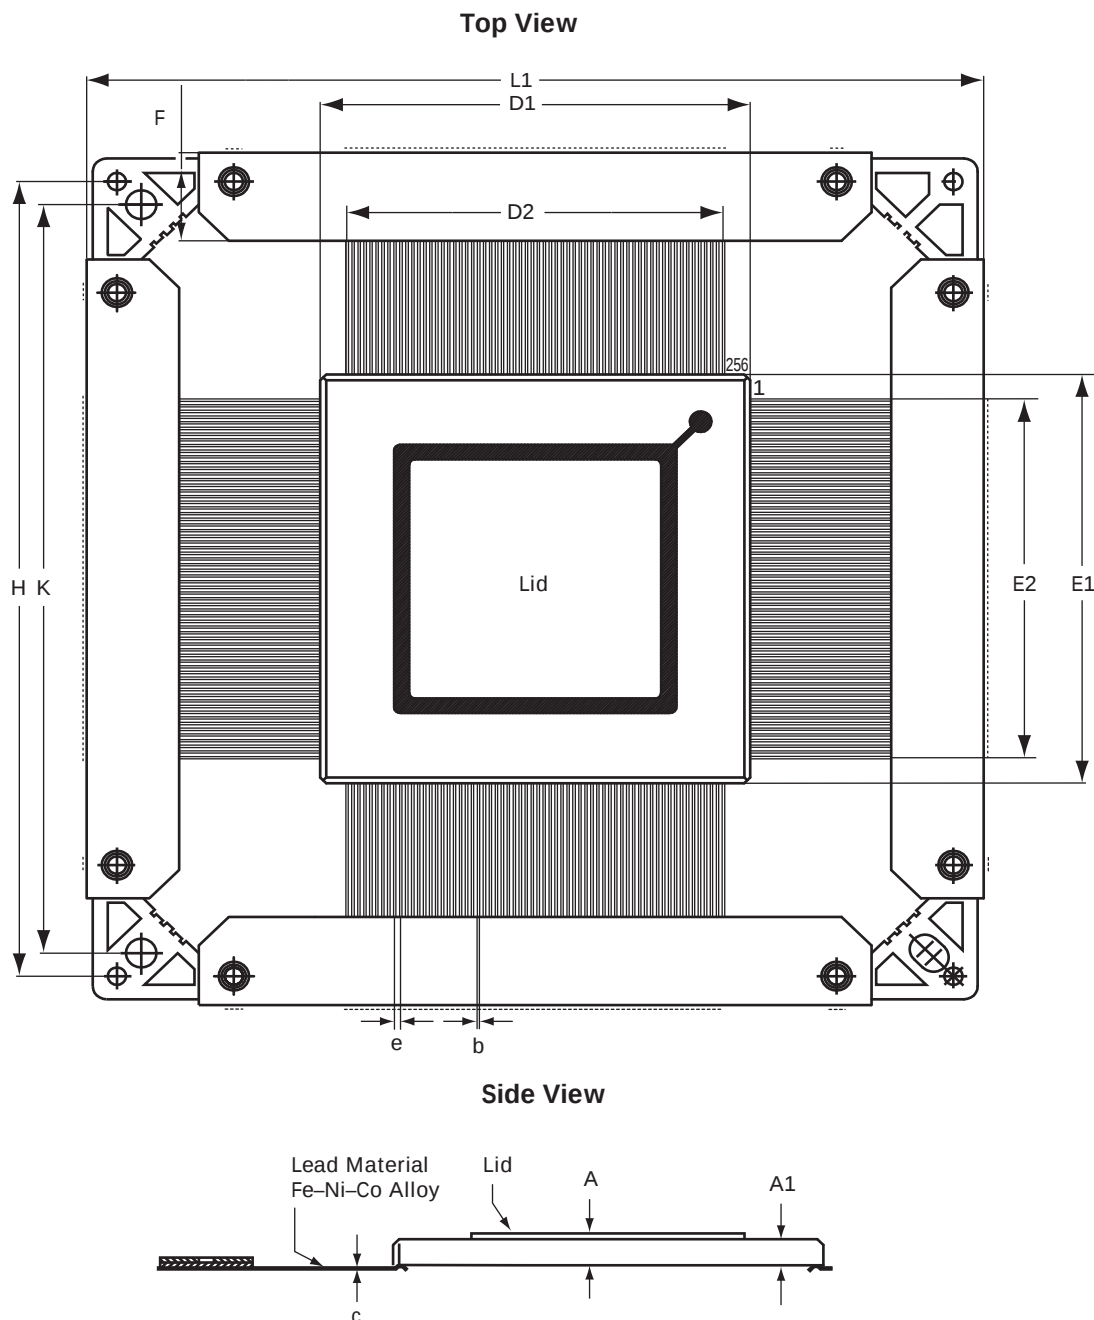
Table 13 • Supported Devices for CQ208 and CQ256

Supported Devices	
CQ208	CQ256
A32200DX ¹	A54SX16
RT54SX72S ¹	A54SX32
RTSX72SU	RT54SX72S ¹
	RTSX72SU

1. *This product is obsolete.*

2.3.5 CQ256—Cavity Down without Heat Sink

The following figure shows the dimension of the CQ256—cavity down without heat sink.

Figure 14 • CQ256—Cavity Down without Heat Sink

Note: Dimensions are in millimeters. For more information on dimensions, see [CQFP with Heat Sink Dimensions](#), page 27.

Note: Seal ring and lid are connected to Ground.

Note: Lead material is Kovar with gold plate over nickel.

Note: Packages are shipped with the uniform ceramic tie bar.

Note: Package is cavity down, with the lid facing the bottom of the package. However, the leads can be formed on either side if the application requires the lid to be facing the top

The following table shows the supported devices for CQ256.

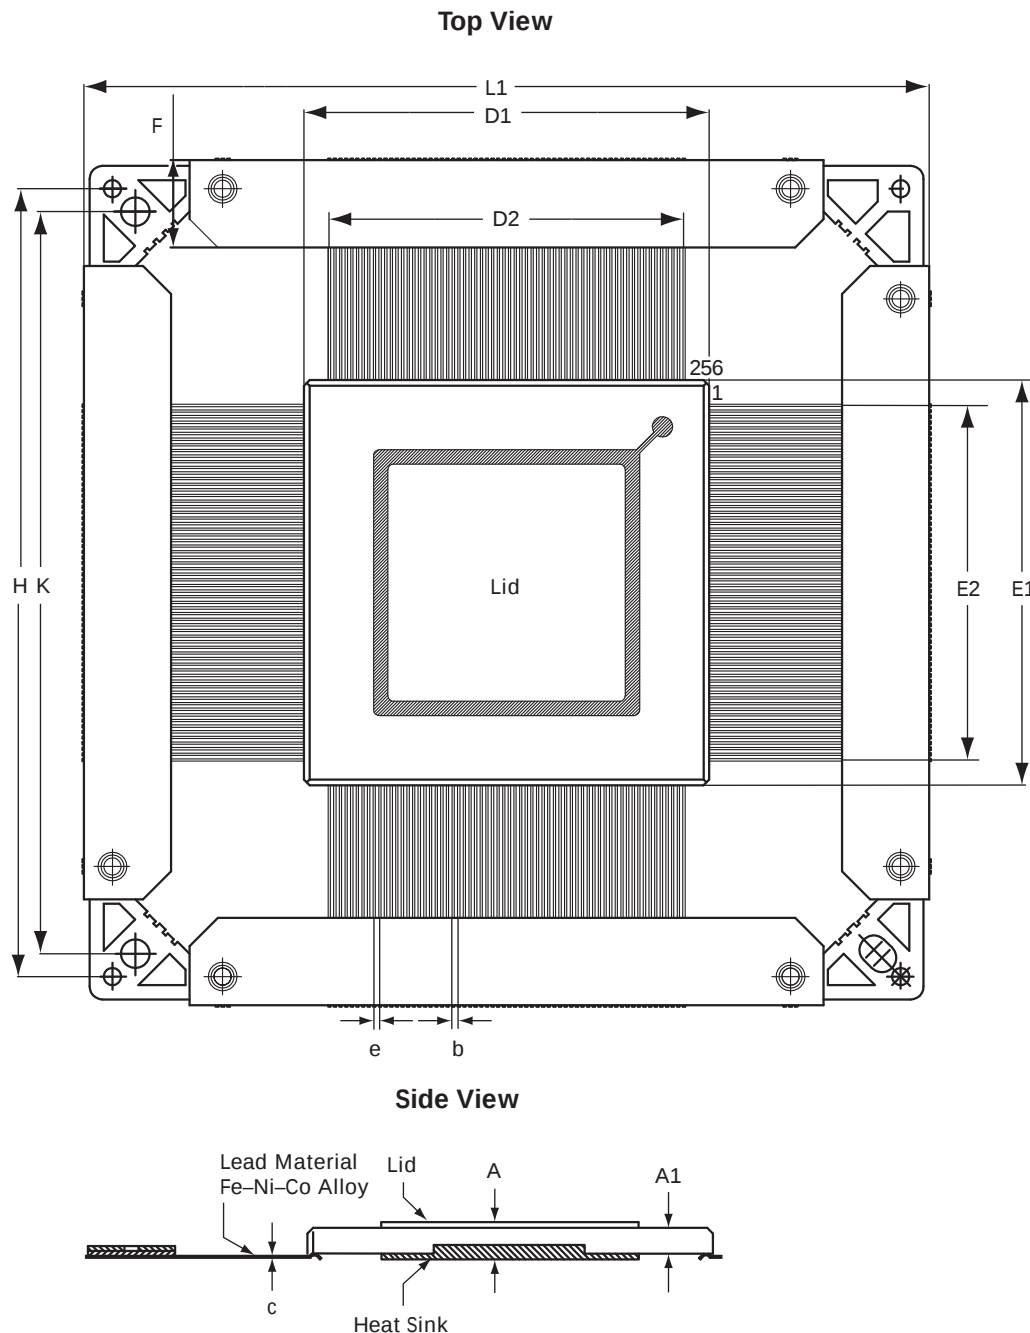
Table 14 • Supported Devices for CQ256

Supported Devices
A42MX36

2.3.6 CQ256—Cavity Down with Heat Sink

The following figure shows the dimension of the CQ256—cavity down with heat sink.

Figure 15 • CQ256—Cavity Down with Heat Sink



Note: Dimensions are in millimeters. For more information on dimensions, see [CQFP with Heat Sink Dimensions](#), page 27.

Note: Packages are shipped with the uniform ceramic tie bar in a test carrier.

Note: Dimensions are in millimeters. For more information on dimensions, see [CQFP with Heat Sink Dimensions](#), page 25.

The following table shows the supported devices for CQ256.

Table 15 • Supported Devices for CQ256

Supported Devices
A32200DX ¹

1. This product is obsolete.

2.3.7 CQFP without Heat Sink Dimensions

The following table lists the dimensions for CQFP without heat sink.

Table 16 • Dimensions for CQFP without Heat Sink

JEDEC Equivalent	CQ132 MO-113 VAR AC			CQ172 MO-113 VAR AE			CQ196 MO-113 VAR AB			CQ208		
Symbol	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.
A	0.094	0.105	0.116	0.094	0.105	0.116	0.094	0.105	0.116	2.30	2.80	3.30
A1	0.080	0.090	0.100	0.080	0.090	0.100	0.080	0.090	0.100	2.00	2.30	2.80
b	0.007	0.008	0.010	0.007	0.008	0.010	0.007	0.008	0.010	0.17	0.20	0.22
c	0.004	0.006	0.008	0.004	0.006	0.008	0.004	0.006	0.008	0.11	0.15	0.18
D1/E1	0.940	0.950	0.960	1.168	1.180	1.192	1.336	1.350	1.364	28.96	29.21	29.46
D2/E2	0.800 BSC			1.050 BSC			1.200 BSC			25.5 BSC		
e	0.025 BSC			0.025 BSC			0.025 BSC			0.50 BSC		
F	0.325	0.350	0.375	0.175	0.200	0.225	0.175	0.200	0.225	7.05	7.75	8.45
H	2.320 BSC			2.320 BSC			2.320 BSC			70.00 BSC		
K	2.140 BSC			2.140 BSC			2.140 BSC			65.90 BSC		
L1	2.485	2.500	2.505	2.485	2.495	2.505	2.485	2.495	2.505	74.60	75.00	75.40
JEDEC Equivalent	CQ256 MO-134 VAR AB			CQ352 ¹ MO-134 VAR AE								
Symbol	Min.	Nom.	Max.	Min.	Nom.	Max.						
A	2.30	2.80	3.30	2.43	2.66	2.89						
A1	2.00	2.30	2.80	2.05	2.28	2.51						
b	0.18	0.20	0.22	0.18	0.20	0.22						
c	0.11	0.15	0.18	0.11	0.15	0.18						
D1/E1	35.64	36.00	36.64	47.75	48.00	48.25						
D2/E2	31.5 BSC			43.51 BSC								
e	0.50 BSC			0.50 BSC								
F	7.05	7.75	8.45	5.00								
H	70.00 BSC			70.00 BSC								

Table 16 • Dimensions for CQFP without Heat Sink

K	65.90 BSC			65.90 BSC		
L1	74.60	75.00	75.40	74.60	75.00	75.40

1. For device RTAX2000D-CQ352 and RTAX4000D-CQ352 only.

Note: All dimensions are in inches except for CQ208, CQ256, and CQ352, which are in millimeters.

Note: BSC = Basic spacing between centers. This is a theoretical true position dimension and so has no tolerance.

2.3.8 CQFP with Heat Sink Dimensions

The following table lists the dimensions for CQFP with heat sink.

Table 17 • Dimensions for CQFP with Heat Sink

JEDEC Equivalent	CQ208			CQ256 MO-134 VAR AB		
Symbol	Min.	Nom.	Max.	Min.	Nom.	Max.
A	2.79	3.30	3.90	2.79	3.30	3.90
A1	2.00	2.30	2.80	2.00	2.30	2.80
b	0.18	0.20	0.22	0.18	0.20	0.22
c	0.11	0.15	0.17	0.11	0.15	0.18
D1/E1	28.96	29.21	29.46	35.64	36.00	36.66
D2/E2	25.5 BSC			31.5 BSC		
e	0.50 BSC			0.50 BSC		
F	7.05	7.75	8.45	7.05	7.75	8.45
H	70.00 BSC			70.00 BSC		
K	65.90 BSC			65.90 BSC		
L1	74.60	75.00	75.40	74.60	75.00	75.40

Note: All dimensions are in inches except for CQ208, CQ256, and CQ352, which are in millimeters.

Note: BSC = Basic spacing between centers. This is a theoretical true position dimension and so has no tolerance.

The dimensions above are for reference only. For more accurate dimensions, use the dimensions in the SMD drawings for a specified device.

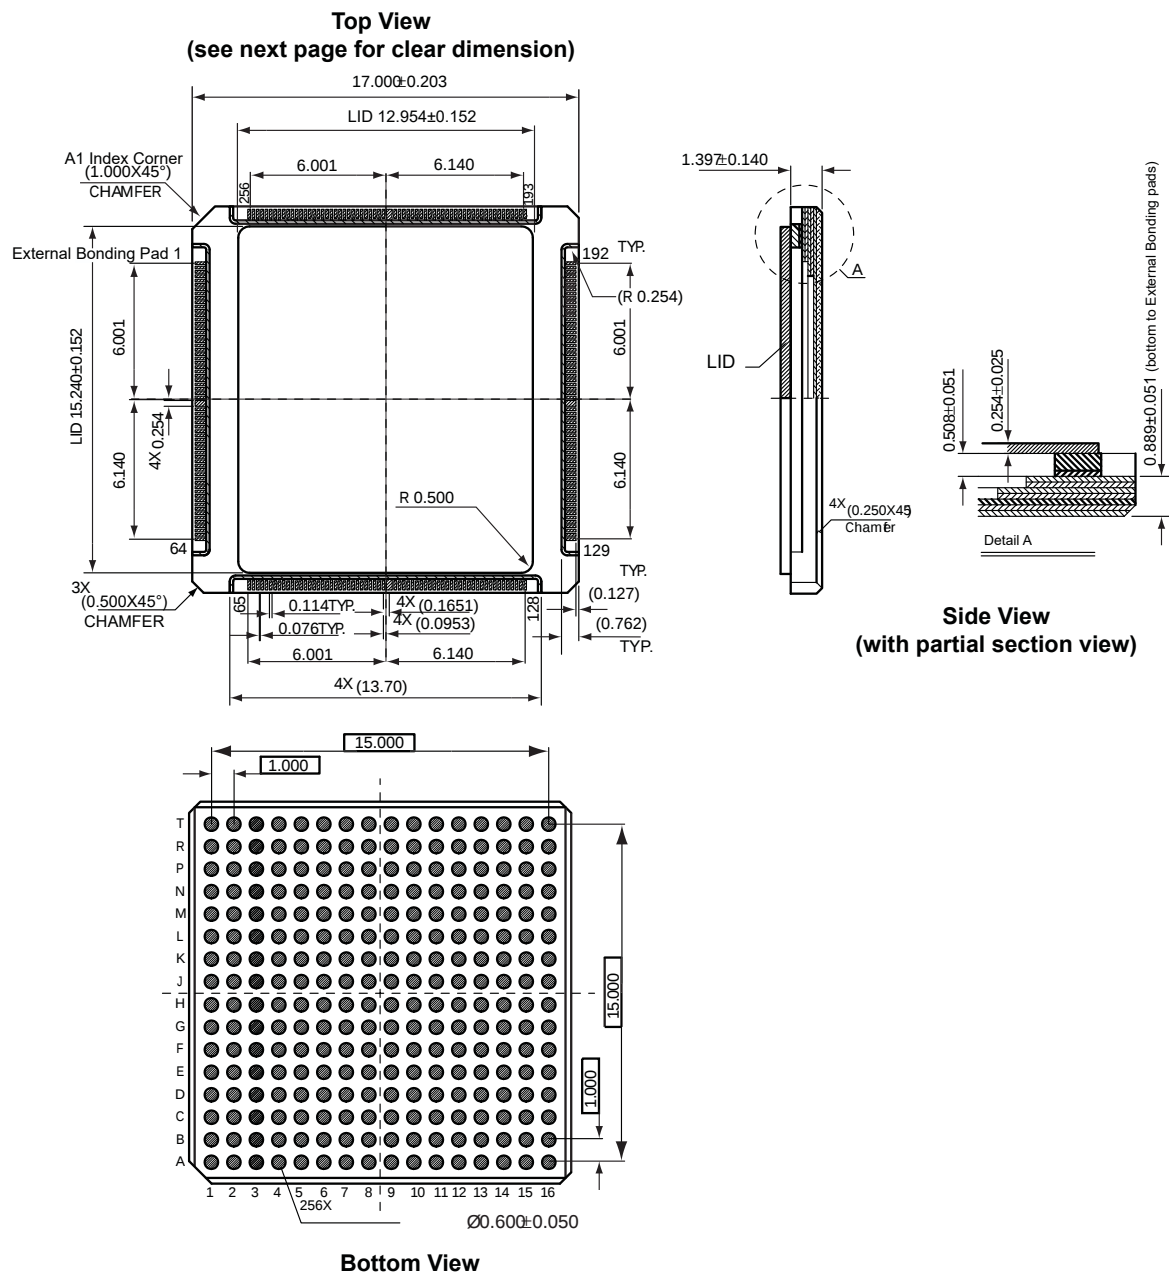
For heat sink information, refer to the *Hermetic Package Mechanical Configuration* document (Cavity, weight, lid size and heat sink size) located at: http://www.microsemi.com/document-portal/doc_view/131087-hermetic-package-mechanical-configuration.

2.4 CCLG

The following figures show package outlines for various packages under ceramic chip carrier land grid substrate (CCLG).

2.4.1 CC256

The following figure shows the package outline of CC256.

Figure 16 • Package Outline of CC256

Note: Units are in mm.

The following table shows the supported devices for CC256.

Table 18 • Supported Devices for CC256

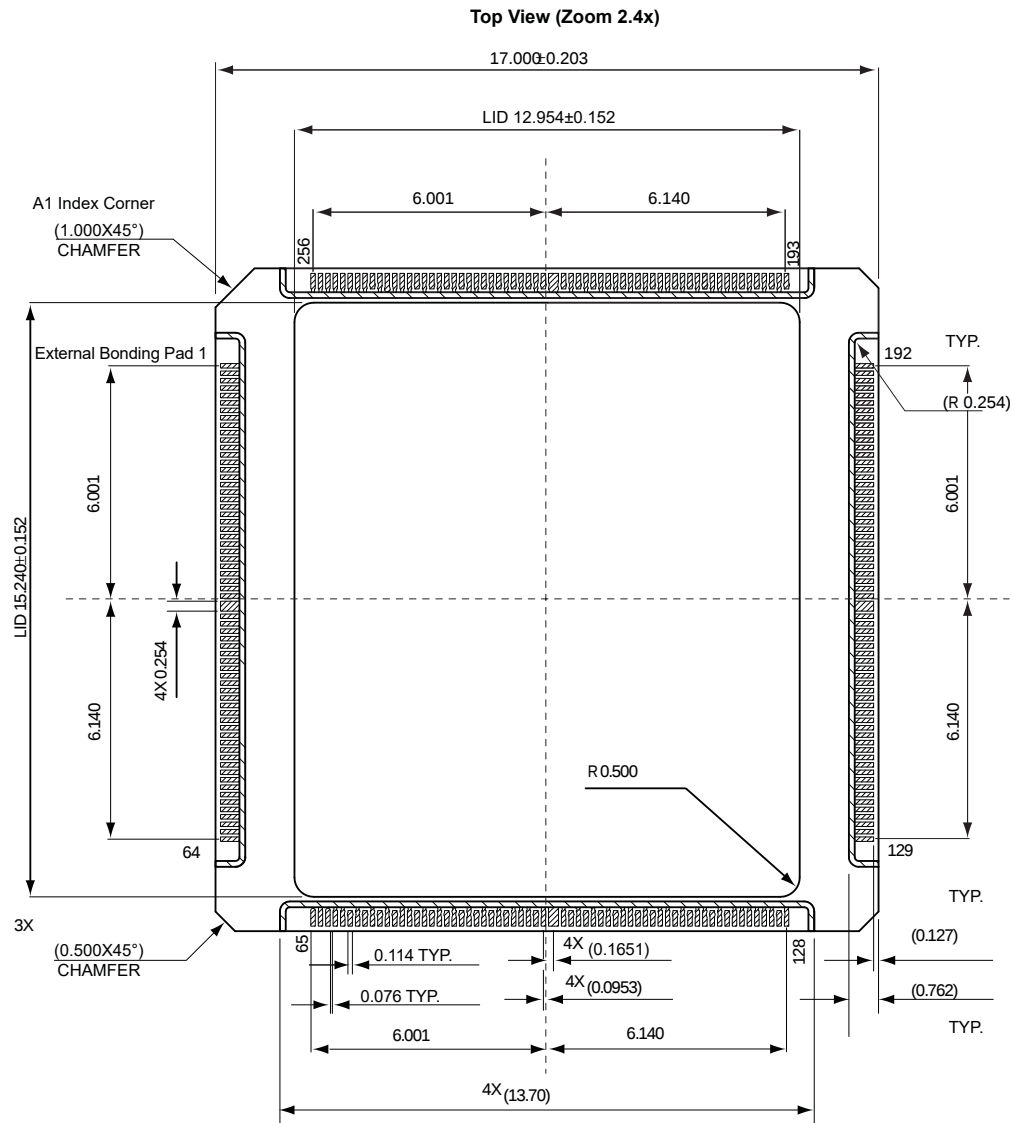
Supported Devices
RT54SX32S ¹
RTSX32SU

1. This product is obsolete.

2.4.2 CCLG Substrate Dimensions

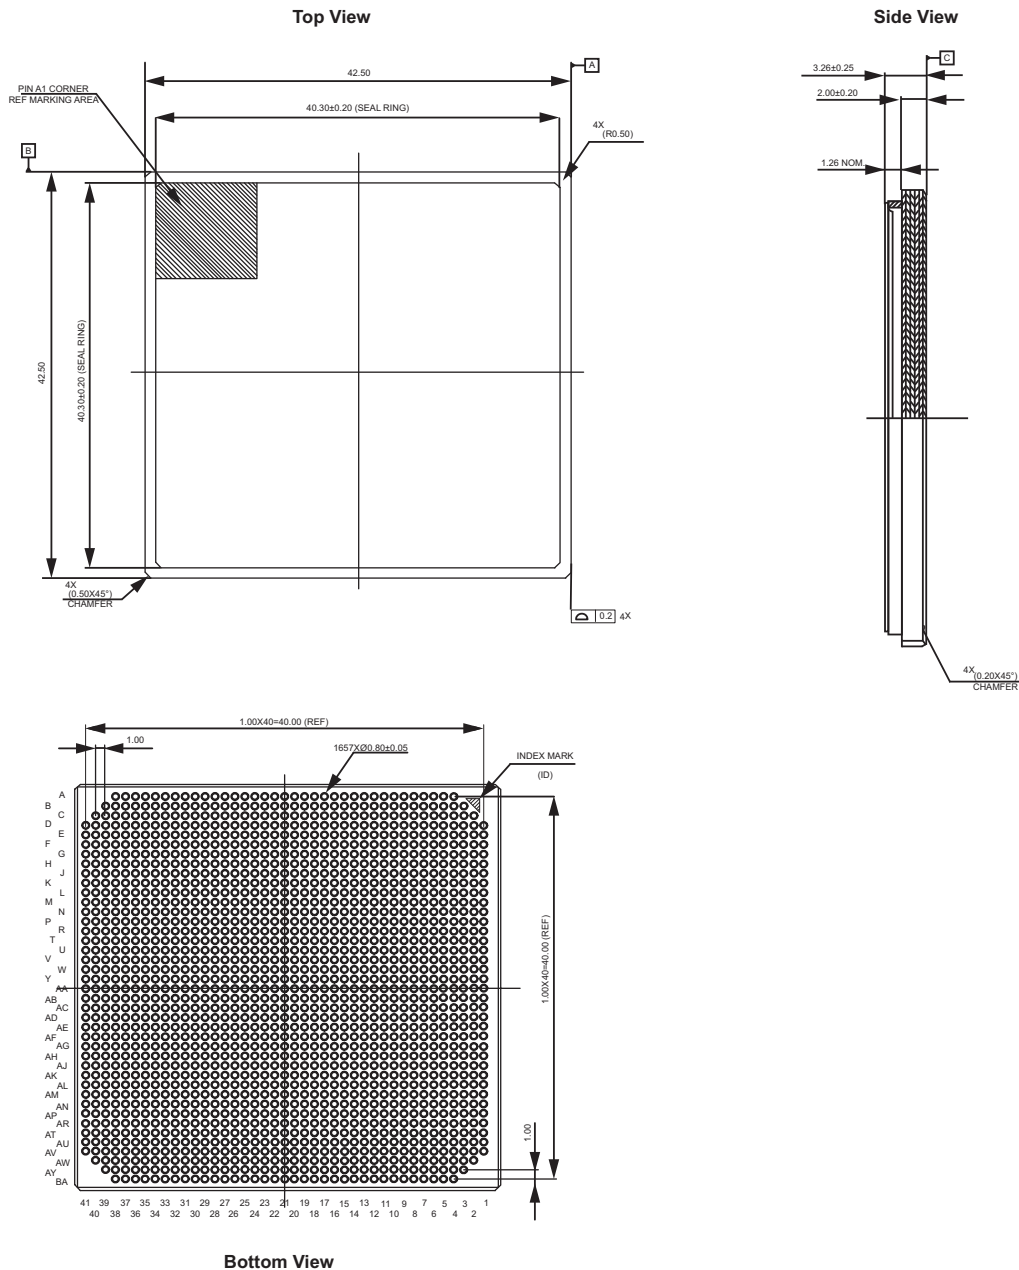
The following figure shows the dimensions of CCLG substrate.

Figure 17 • CCLG Substrate Dimensions



2.4.3 LG1657

The following figure shows the package outline of LG1657.

Figure 18 • Package Outline of LG1657

Note: The units are in mm.

Note: Note: Seal ring is connected to the ground (GND).

The following table shows the supported devices for LG1657.

Table 19 • Supported Devices for LG1657

Supported Devices

RT4G150

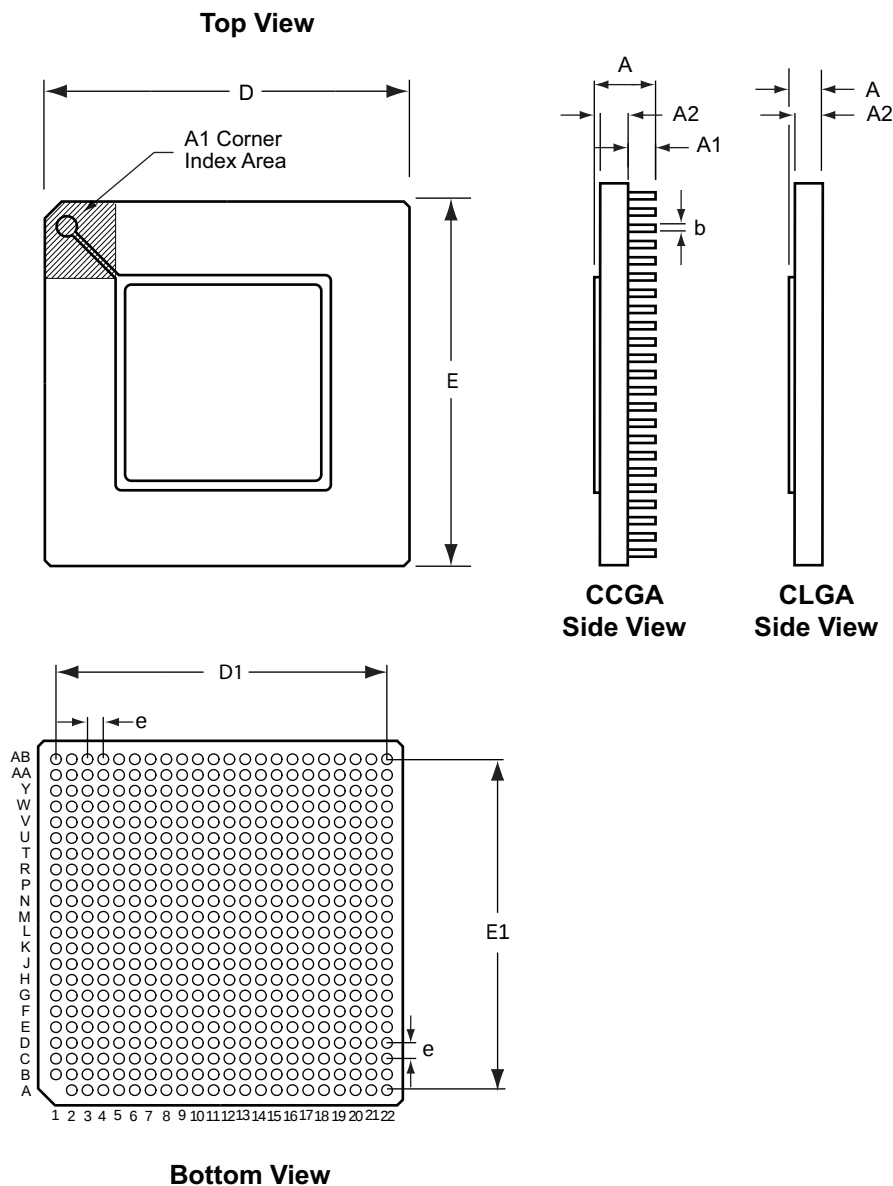
2.5 CCGA

The following figures show package outlines for various packages under ceramic column grid array (CCGA).

2.5.1 CG484

The following figure shows the package outline of CG484.

Figure 19 • Package Outline of CG484



Note: The top and side views will be completed in the future.

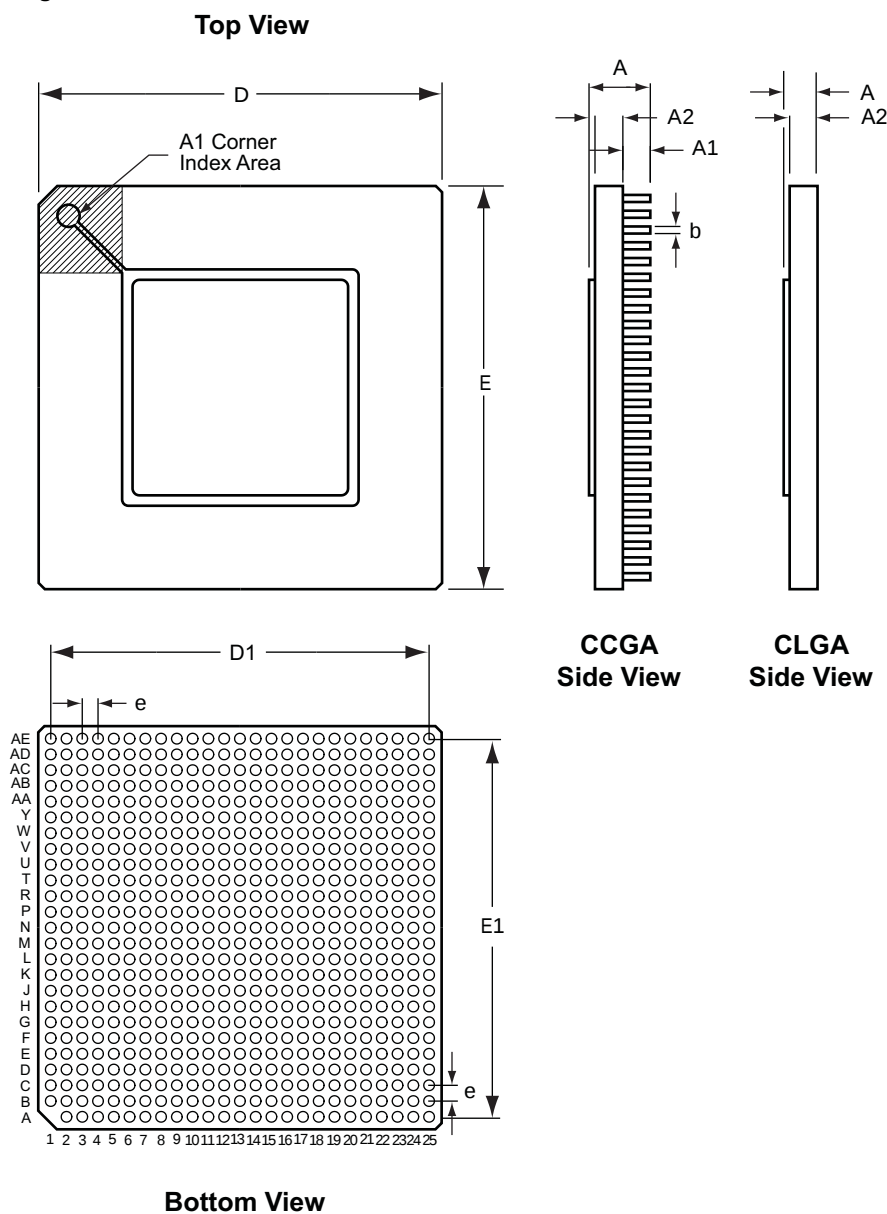
Table 20 • Supported Devices for CG484

Supported Devices
RT3PE600L
RT3PE3000L

2.5.2 CG624

The following figure shows the package outline of CG624.

Figure 20 • Package Outline of CG624



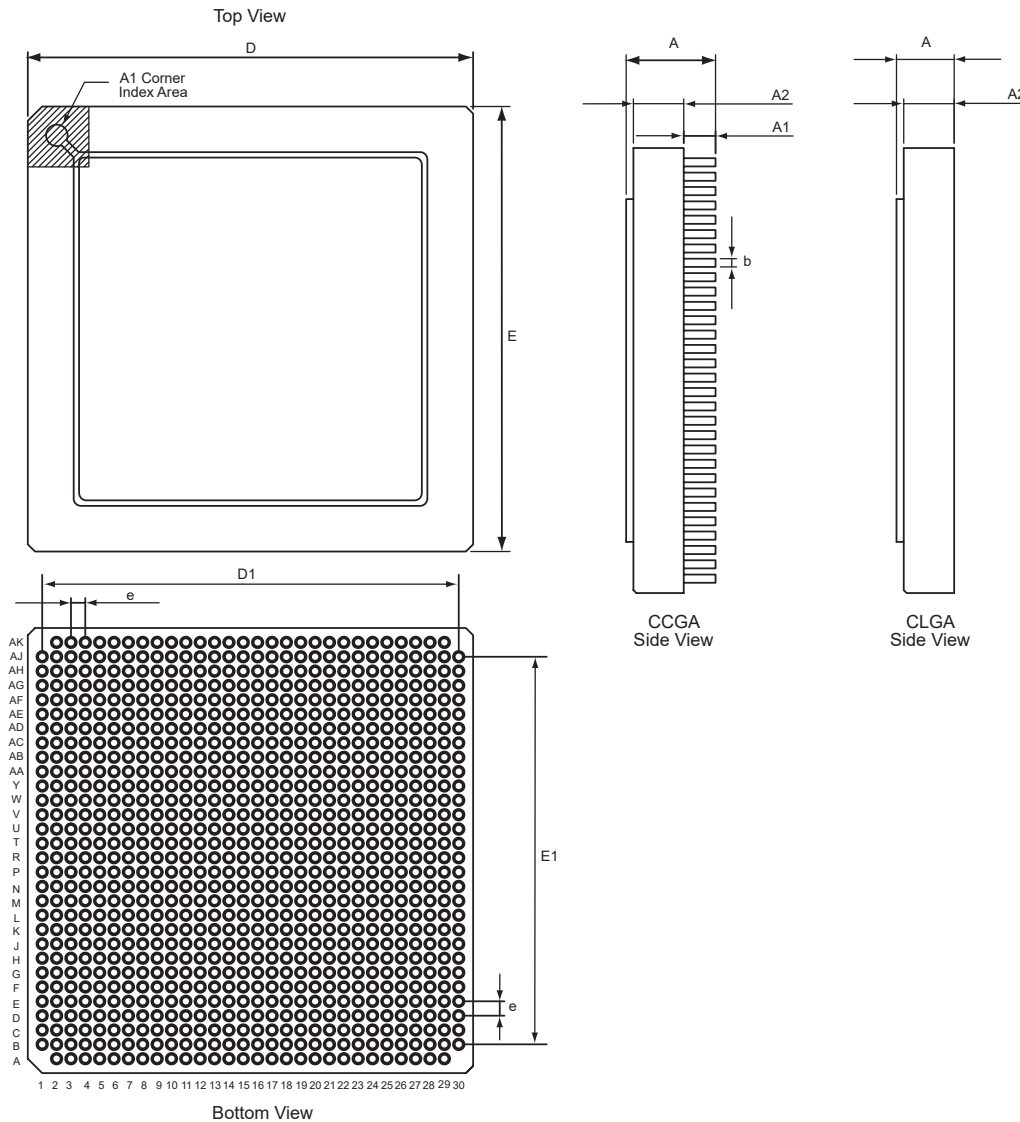
The following table shows the supported devices for CG624.

Table 21 • Supported Devices for CG624

Supported Devices			
AX1000	RTAX1000S	APA600	RTSX72SU
AX2000	RTAX2000S	APA1000	
	RTAX250S		

2.5.3 CG896

The following figure shows the package outline of CG896.

Figure 21 • Package Outline of CG896

The following table shows the supported devices for CG896.

Table 22 • Supported Devices for CG896

Supported Devices
RT3PE3000L

2.5.4 CCGA Dimensions

The following table lists the dimensions of CCGA.

Table 23 • Dimensions of CCGA

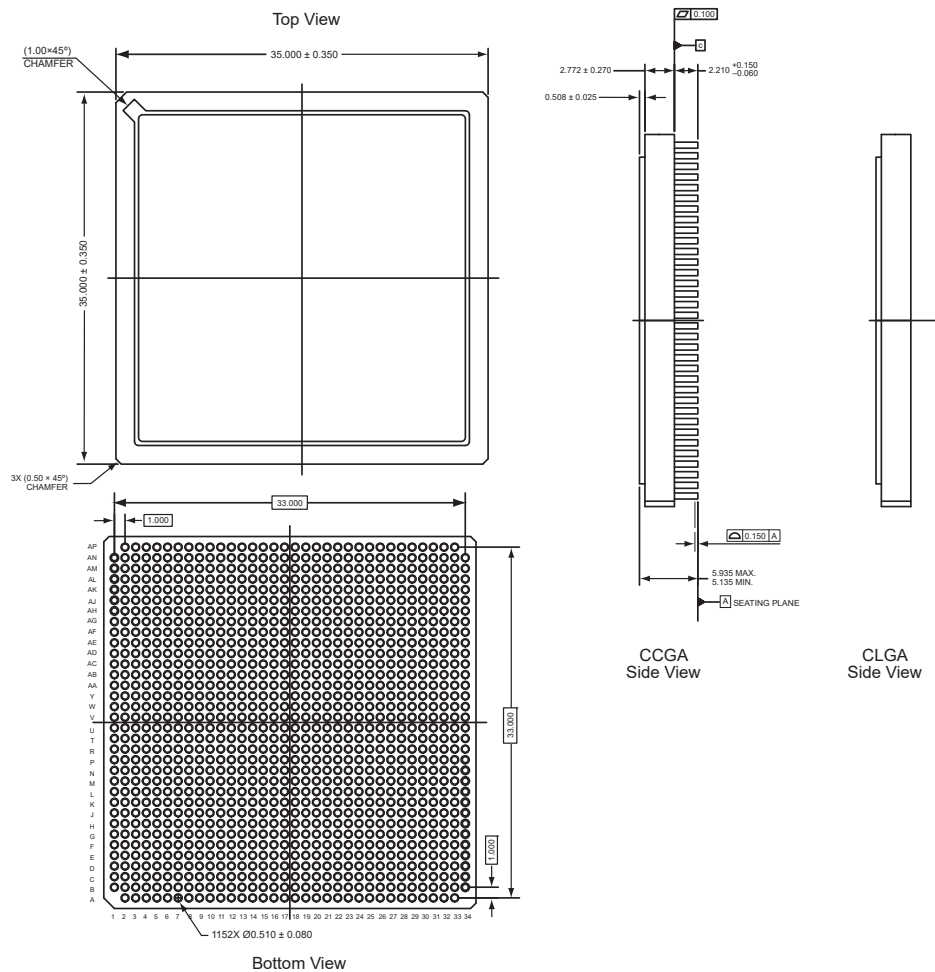
Dimension	CG484			CG624			CG896		
	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.
CCGA - A	5.19	5.72	6.19	4.54	4.88	5.41	5.65	6.23	6.75
CLGA - A	3.06	3.51	3.83	2.41	2.67	3.05	3.16	3.51	3.86

Table 23 • Dimensions of CCGA

A1	2.15	2.21	2.36	2.15	2.21	2.36	2.15	2.21	2.36
A2	2.70	3.00	3.30	2.06	2.29	2.52	3.16	3.51	3.86
b	0.43	0.51	0.59	0.43	0.51	0.59	0.43	0.51	0.59
D	22.77	23.00	23.23	32.17	32.50	32.83	30.69	31.00	31.31
D1	21.00 BSC			30.48 BSC			29.00 BSC		
E	22.77	23.00	23.23	32.17	32.50	32.83	30.69	31.00	31.31
E1	21.00 BSC			30.48 BSC			29.00 BSC		
e	1.00 BSC			1.27 BSC			1.00 BSC		

2.5.5 CG1152

The following figure shows the package outline of CG1152.

Figure 22 • Package Outline of CG1152

Note: The units are in mm.

Note: Note: Seal ring and die attach are connected to the ground (GND).

The following table shows the supported devices for CG1152.

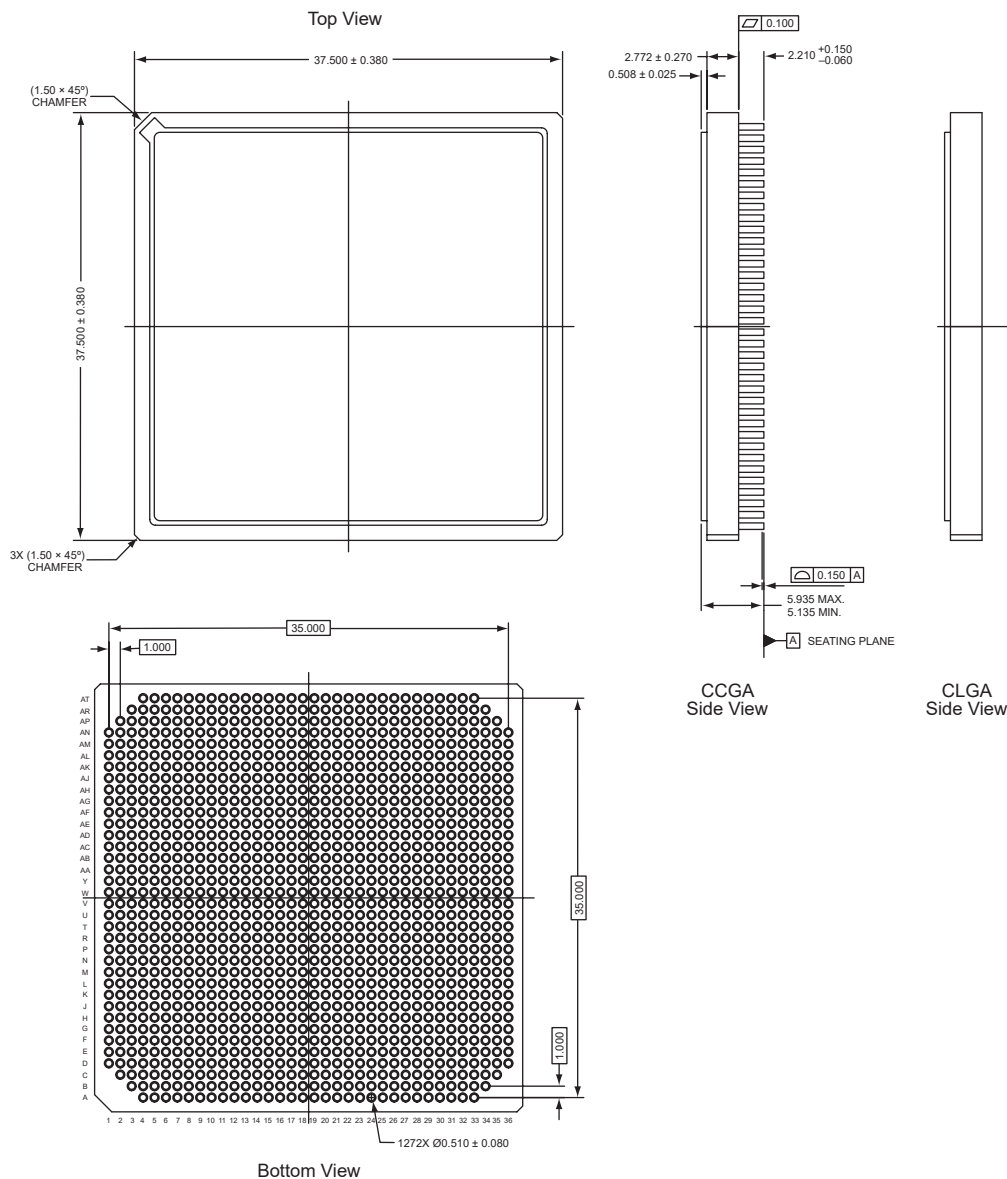
Table 24 • Supported Devices for CG1152

Supported Devices
RTAX2000S

2.5.6 CG1272

The following figure shows the package outline of CG1272.

Figure 23 • Package Outline of CG1272



Note: The units are in mm.

Note: Seal ring and die attach paddle are connected to the ground (GND).

The following table shows the supported devices for CG1272.

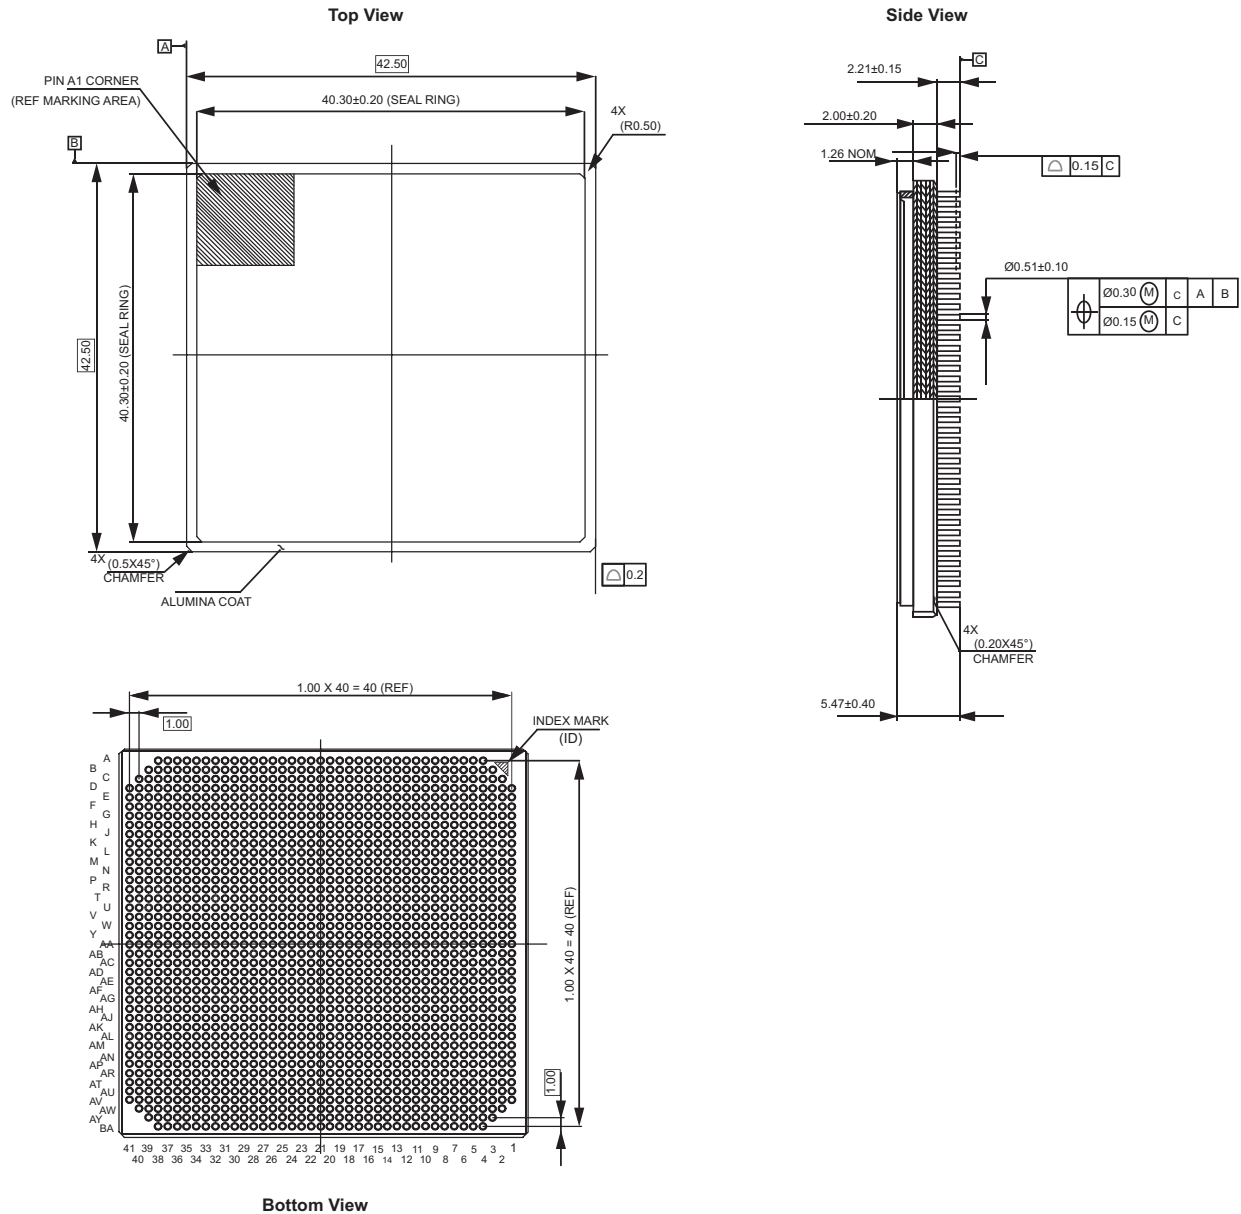
Table 25 • Supported Devices for CG1272

Supported Devices
RTAX4000S
RTAX2000D

2.5.7 CG1657

The following figure shows the package outline of CG1657.

Figure 24 • Package Outline of CG1657



Note: The units are in mm.

Note: Seal ring is connected to the ground (GND).

The following table shows the supported devices for CG1657.

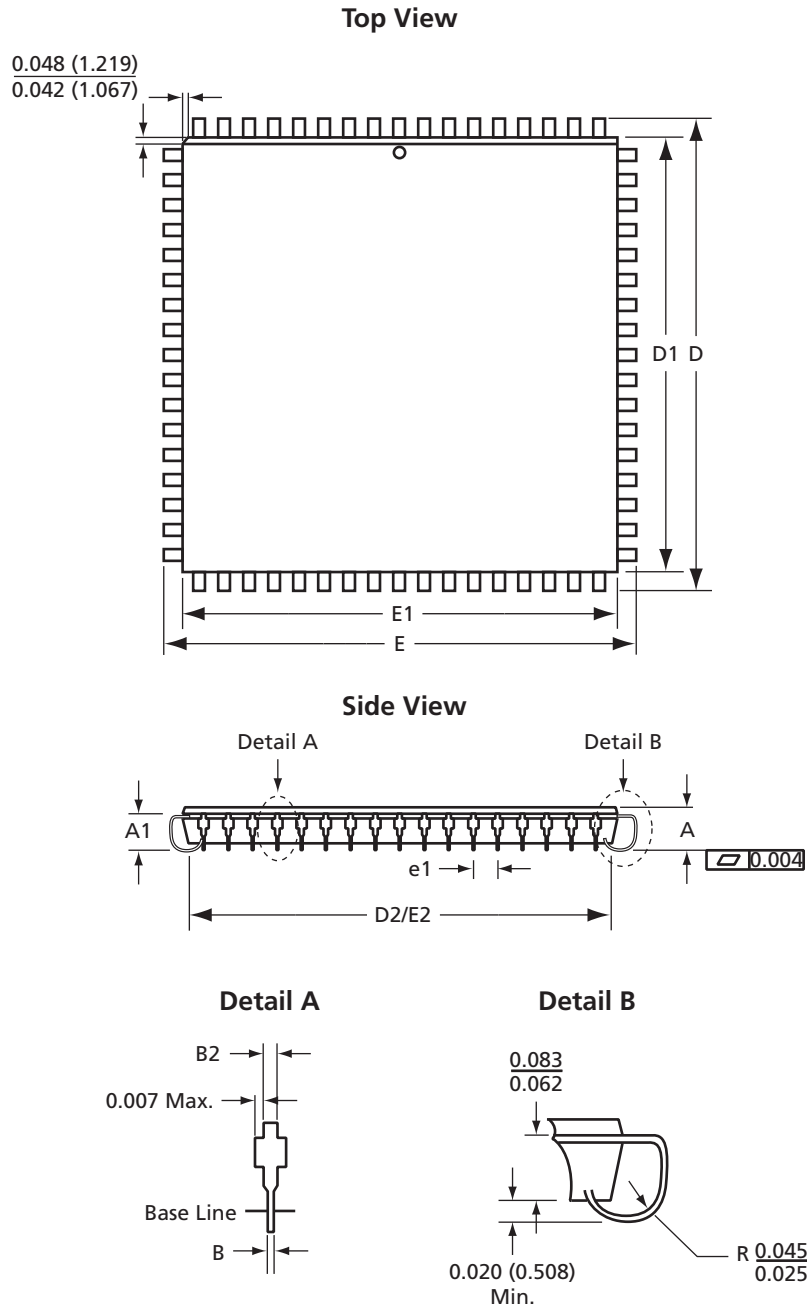
Table 26 • Supported Devices for CG1657

Supported Devices
RT4G150

2.6 PLCC

The following figure shows the dimensions and details of plastic leaded chip carrier (PLCC).

Figure 25 • PLCC



Note: Dimensions are in millimeters. For more information on dimensions, see [Plastic Leaded Chip Carrier Dimensions](#), page 38.

The following table lists the supported devices for PL44, PL68, and PL84.

Table 27 • Supported Devices for PL44, PL68, and PL84

Supported Devices				
PL44	PL68	PL84		
A1010B	A1010B	A10V20B	A1020B	A3265A ¹
A1020B	A1020B	A1225XLV ¹	A1225A	A54SX08
A40MX02	A10V10B	A1280XLV ¹	A1240A	A32100DX ¹
A40MX04	A10V20B	A1240XLV ¹	A1280A	A32140DX ¹
	A40MX02	A14V15A	A1225XL ¹	A40MX04
	A40MX04	A14V25A	A1240XL ¹	A42MX09
		A14V40A	A1280XL ¹	A42MX16
		A3265DXV ¹	A1415A	A42MX24
		A32100DXV ¹	A1425A	
		A32140DXV ¹	A1440A	

1. This product is obsolete.

2.6.1 Plastic Leaded Chip Carrier Dimensions

The following table lists the dimensions of plastic leaded chip carrier.

Table 28 • Dimensions of Plastic Leaded Chip Carrier

JEDEC Equivalent	PL44 MS-018 VAR AC			PL68 MS-018 VAR AE			PL84 MS-018 VAR AF		
Dimension	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.
A	0.165	0.172	0.180	0.165	0.172	0.180	0.165	0.172	0.180
A1	0.090	0.105	0.120	0.090	0.105	0.120	0.090	0.105	0.120
B	0.013	–	0.021	0.013	–	0.021	0.013	–	0.021
B2	0.026	–	0.032	0.026	–	0.032	0.026	–	0.032
D/E	0.685	0.690	0.695	0.985	0.990	0.995	1.185	1.190	1.195
D1/E1	0.650	0.653	0.656	0.950	0.954	0.958	1.150	1.154	1.158
D2/E2	0.590	0.610	0.630	0.890	0.910	0.930	1.090	1.110	1.130
e1	0.050 BSC			0.050 BSC			0.050 BSC		

Note: All dimensions are in inches.

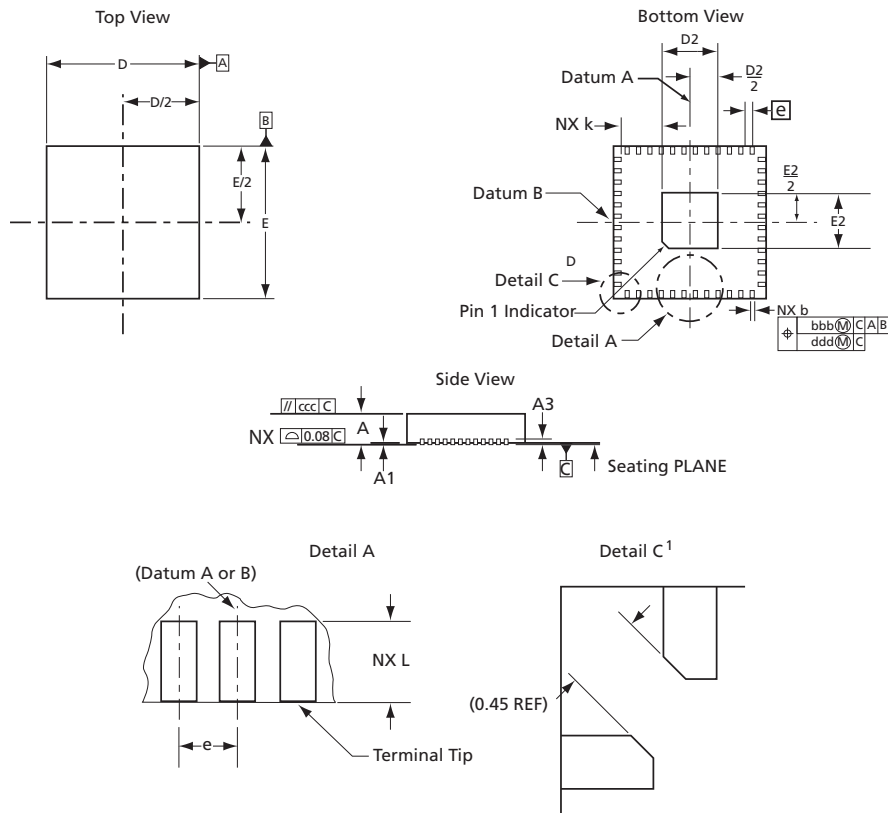
Note: BSC = Basic spacing between centers.

2.7 QFN

The following figures show package outlines for various packages under quad flat no lead (QFN).

2.7.1 QN48

The following figure shows the package outline of QN48.

Figure 26 • Package Outline of QN48

Note: Corner chamfer leads are applied to maintain minimum spacing between corner leads; otherwise, keep normal lead shape.

Note: Die attach paddle center of package is tied to the ground (GND).

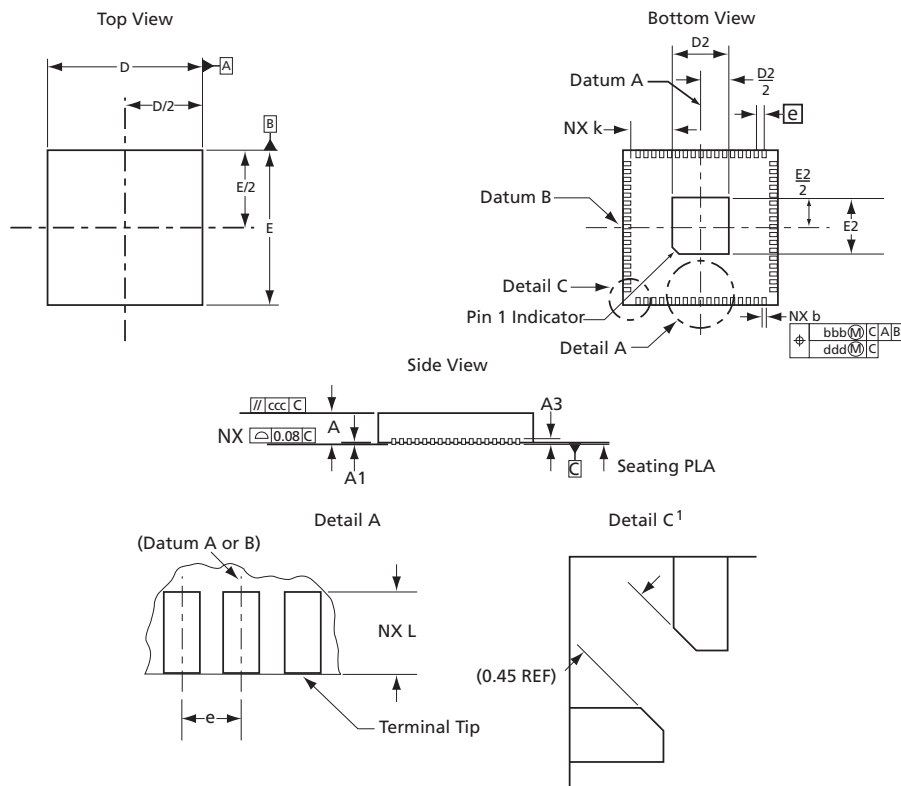
The following table shows the supported devices for QN48.

Table 29 • Supported Devices for QN48

Supported Devices	
A3PN010	AGN010
A3P030/A3PN030	AGL030/AGLN030

2.7.2 QN68

The following figure shows the package outline of QN68.

Figure 27 • Package Outline of QN68

Note: Corner chamfer leads are applied to maintain minimum spacing between corner leads; otherwise, keep normal lead shape.

Note: Die attach paddle center of package is tied to the ground (GND).

The following table shows the supported devices for QN68.

Table 30 • Supported Devices for QN68

Supported Devices			
AGL015	AGLN015	A3P015	A3PN015
AGL030	AGLN020	A3P030	A3PN020
	AGLN030		A3PN030

2.7.3 QN48 and QN68 Quad Flat No Leads Single Row Dimension

The following table shows the single row dimension of QN48 and QN68 quad flat no leads.

Table 31 • QN48 and QN68 Quad Flat No Leads Single Row Dimensions

Dimension	QN48, page 38 MO-220, Variation VLLE-1			QN68, page 39 MO-220, Variation VLLE-1		
	Min.	Nom.	Max.	Min.	Nom.	Max.
A	0.80	0.90	1.00	0.80	0.90	1.00
A1	0	.02	0.05	0.00	0.02	0.05
A3	0.20 REF			0.20 REF		
b	0.15	0.20	0.25	0.15	0.20	0.25
D/E	5.90	6.00	6.1	7.90	8.00	8.10

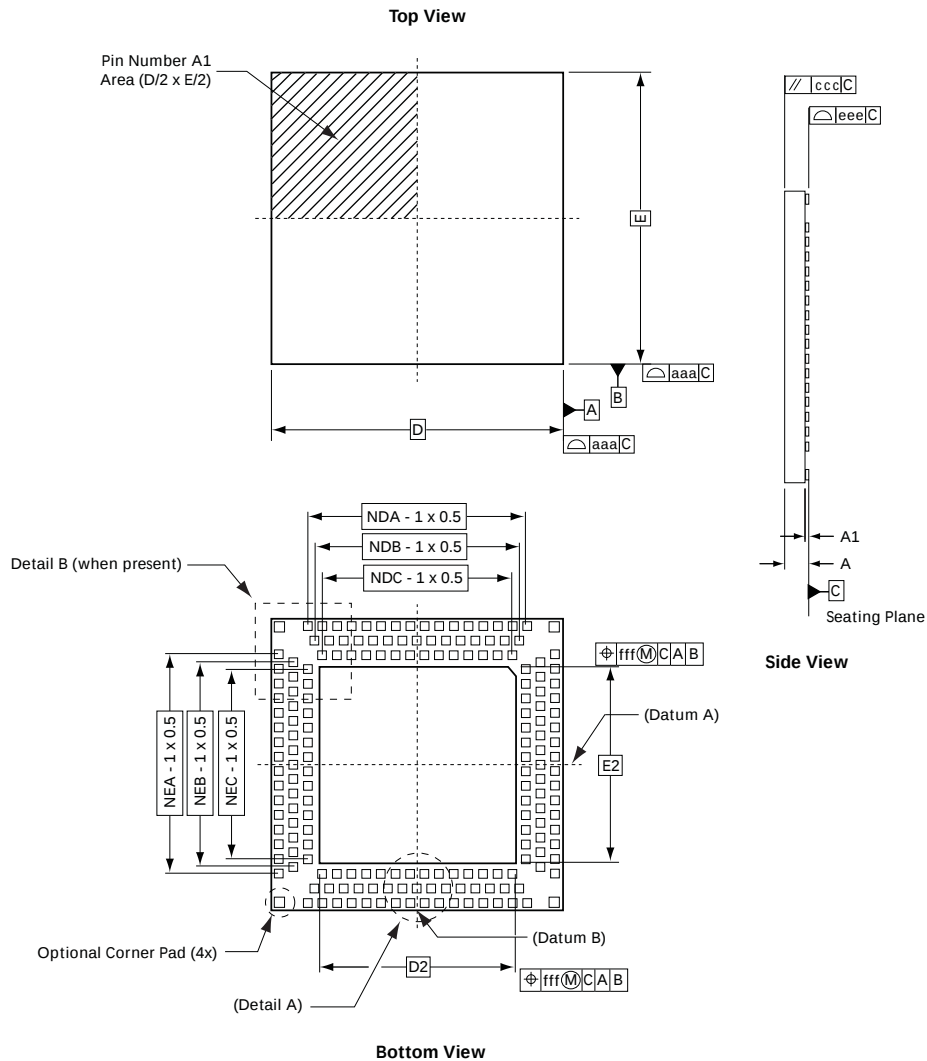
Table 31 • QN48 and QN68 Quad Flat No Leads Single Row Dimensions

Dimension	QN48, page 38 MO-220, Variation VLLE-1			QN68, page 39 MO-220, Variation VLLE-1		
	Min.	Nom.	Max.	Min.	Nom.	Max.
D2/E2	4.50	4.65	4.8	2.77	2.92	3.07
e	0.40 BSC			0.40 BSC		
k	0.20	–	–	0.20	–	–
L	0.30	0.40	0.5	0.35	0.40	0.45
N	48			68		
bbb	0.07			0.07		
ccc	0.10			0.10		
ddd	0.05			0.05		

Note: All dimensions are in millimeters.

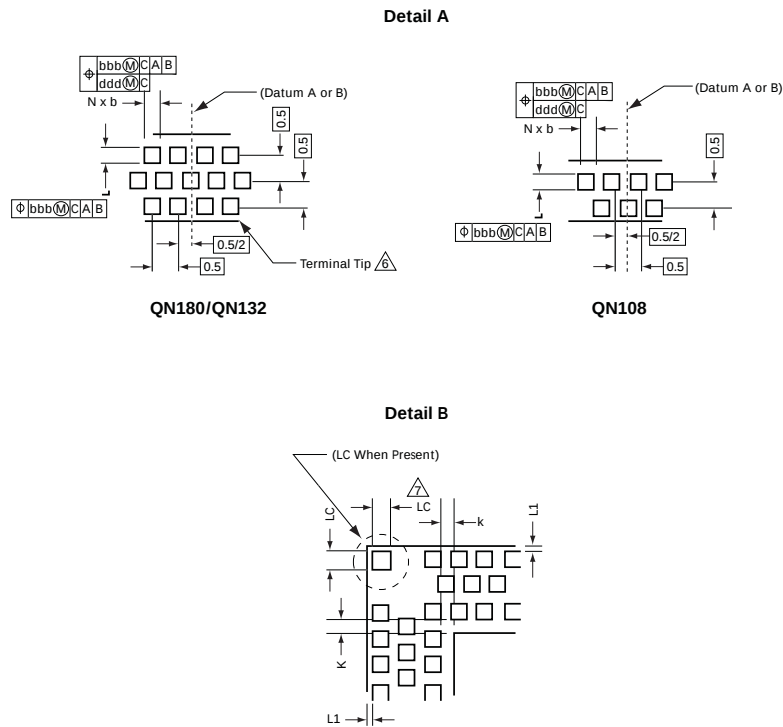
2.8 Quad Flat No Lead

The following figure shows the dimensions of quad flat no lead.

Figure 28 • Quad Flat No Lead

2.8.1 Quad Flat No Lead Details

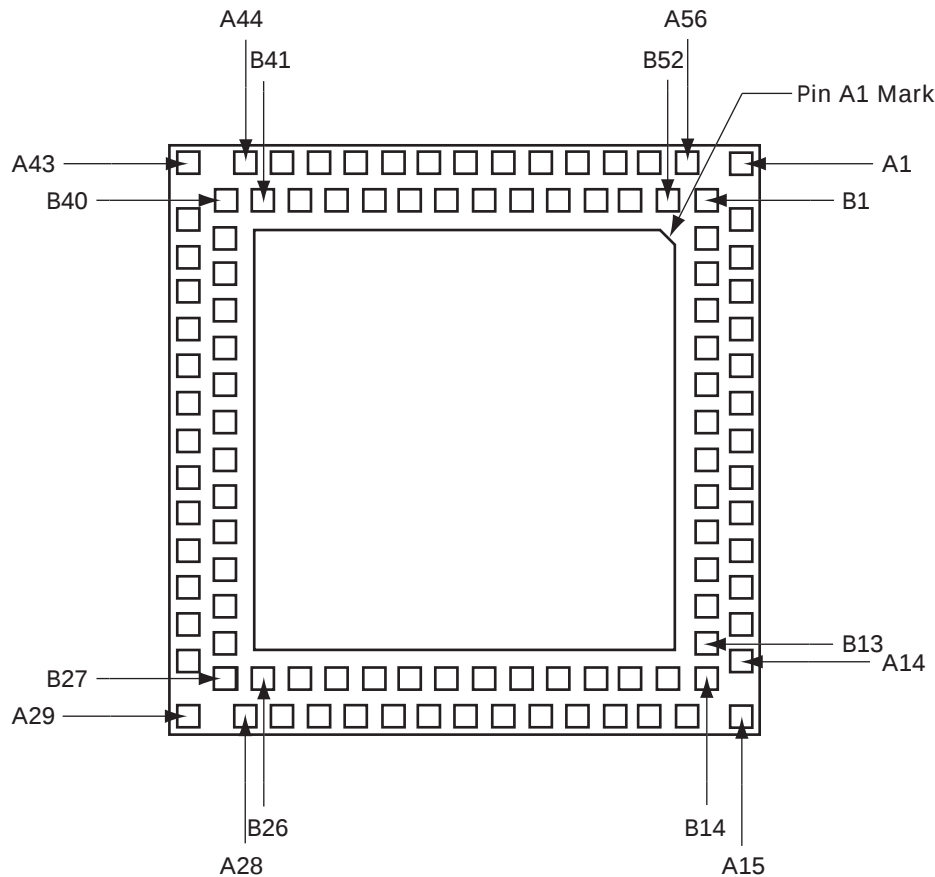
The following figure shows the details of quad flat no lead.

Figure 29 • Quad Flat No Lead Details

2.8.2 QN108 Bottom View

The following figure shows the package bottom view of QN108.

Figure 30 • Bottom View of QN108



Note: Die attach paddle center of package is tied to the ground (GND).

Note: Package is discontinued and not available.

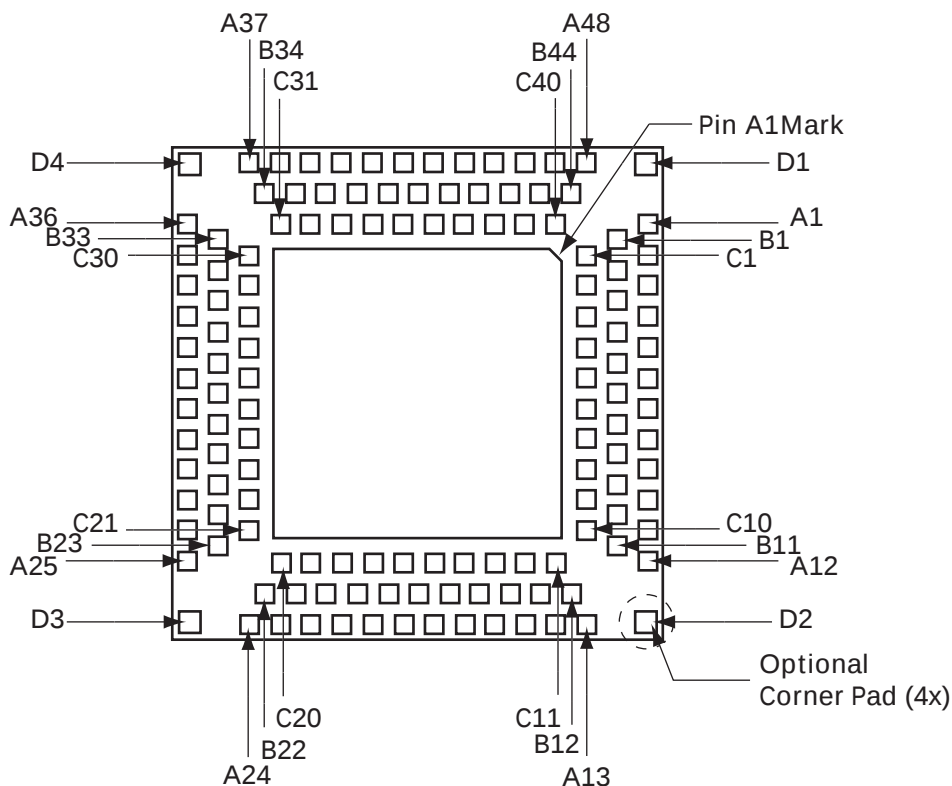
The following table shows the supported devices for QN108.

Table 32 • Supported Devices for QN108

Supported Device
AFS090

2.8.3 QN132 Bottom View

The following figure shows the package bottom view of QN132.

Figure 31 • Bottom View of QN132

Note: Die attach paddle center of package is tied to the ground (GND).

Note: Package is discontinued and not available.

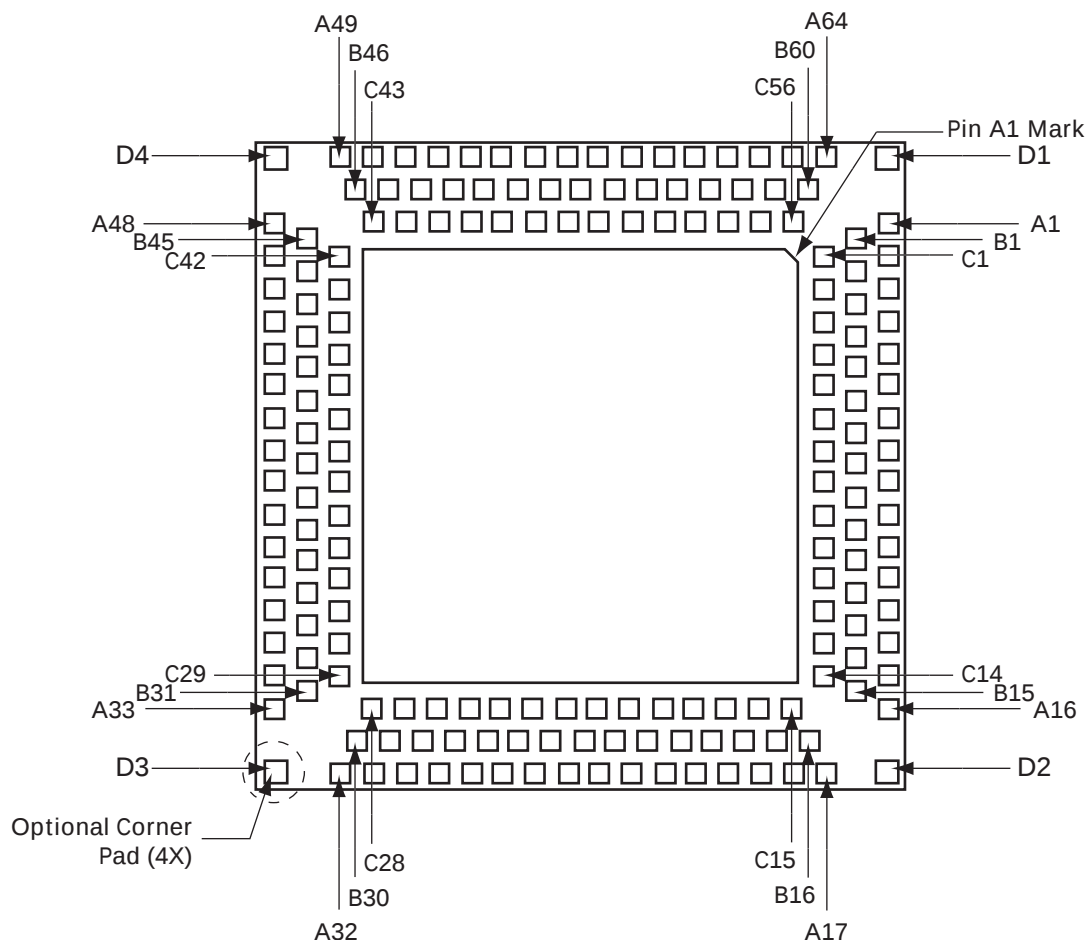
The following table shows the supported devices for QN132.

Table 33 • Supported Devices for QN132

Supported Devices	
AGL030	A3P030
AGL060	A3P060
AGL125	A3P125
AGL250	A3P250

2.8.4 QN180 Bottom View

The following figure shows the package bottom view of QN180.

Figure 32 • Bottom View of QN180

Note: Die attach paddle center of package is tied to the ground (GND).

Note: Package is discontinued and not available.

The following table shows the supported devices for QN180.

Table 34 • Supported Devices for QN180

Supported Devices
AFS090
AFS250
M1AFS250

2.8.5 Quad Flat No Leads Dimensions

The following table lists the dimensions of the quad flat no leads.

Table 35 • Dimensions of Quad Flat No Leads

Symbol	Min.	Nom.	Max.
A	0.70	0.75	0.80
A1	0.00	—	0.05
b	0.25	—	0.35
k	0.20	—	—

Table 35 • Dimensions of Quad Flat No Leads

Symbol	Min.	Nom.	Max.
L	0.25	–	0.35
L1	0.05	–	0.15
Tolerance of Form and Position			
aaa	0.15		
bbb	0.10		
ccc	0.10		
ddd	0.05		
eee	0.08		
fff	0.10		

Note: All dimensions are in millimeters.

Note: BSC = Basic spacing between centers.

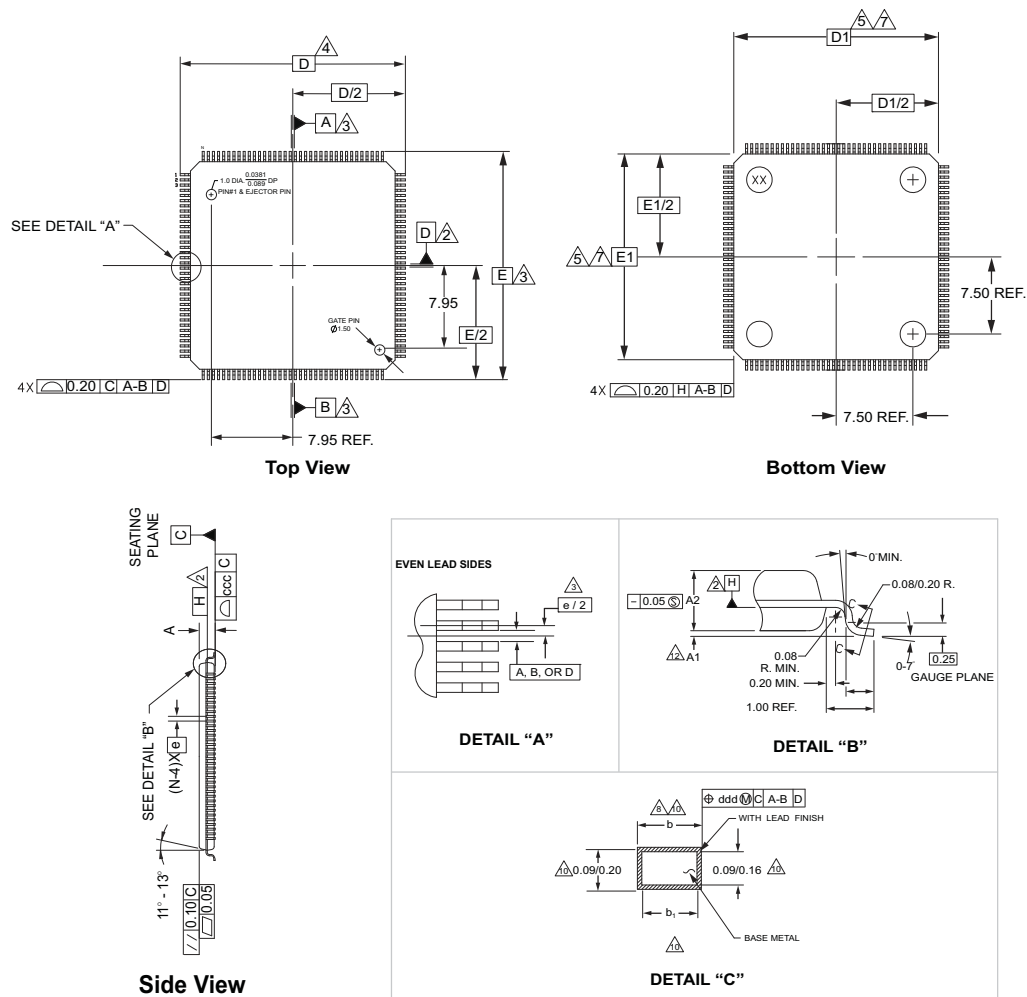
The following table lists the dimensions of QN108, QN132, and QN180 packages.

Table 36 • Dimensions for QN108, QN132, and QN180

Variation				
Symbol		QN108	QN132	QN180
D BSC.		8.00	8.00	10.00
E BSC.		8.00	8.00	10.00
D2	Min.	5.65	4.65	6.65
	Nom.	5.70	4.70	6.70
	Max.	5.75	4.75	6.75
E2	Min.	5.65	4.65	6.65
	Nom.	5.70	4.70	6.70
	Max.	5.75	4.75	6.75
LC	Min.	–	0.30	0.30
	Nom.	–	–	–
	Max.	–	0.40	0.40
N		108	132	180
NDA		12	12	16
NDB		11	11	15
NDC		–	10	14
NEA		12	12	16
NEB		11	11	15
NEC		–	10	14

2.9 Plastic Quad Flat Pack Rectangular Package (TQ144)

The following figure shows the details and dimensions of plastic quad flat pack rectangular.

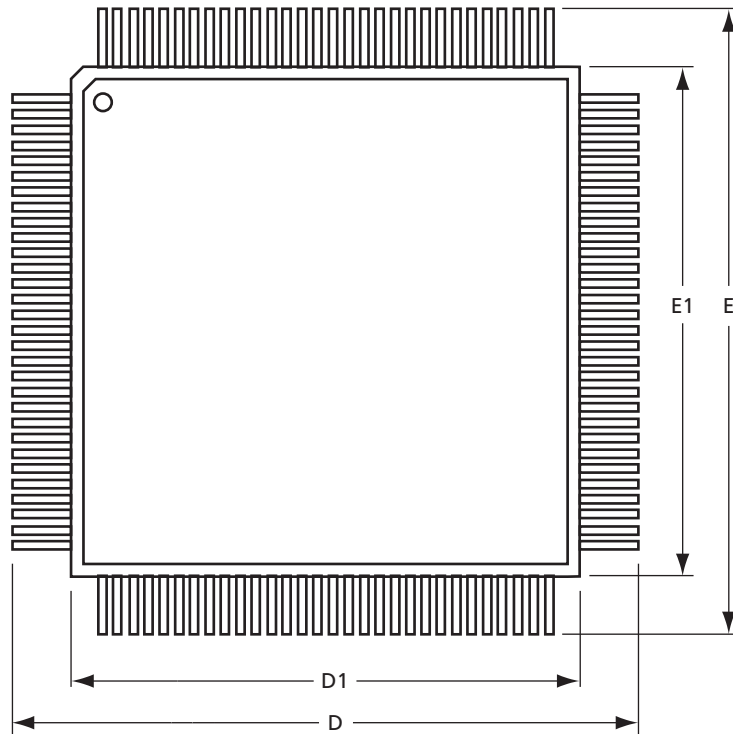
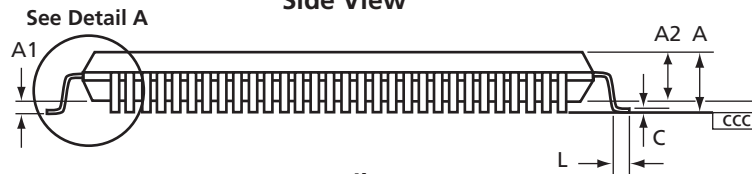

Figure 33 • Plastic Quad Flat Pack Rectangular Package (TQ144)

NOTES: UNLESS OTHERWISE SPECIFIED

1. All dimensioning and tolerances conform to ASME Y14.5-1994.
2. Datum plane **H** located at mold parting line and coincident with lead, where lead exits plastic body at bottom of parting line.
3. Datums **A-B** and **D** to be determined at centerline between leads where leads exit plastic body at datum plane **H**.
4. To be determined at seating plane **C**.
5. Dimensions **D1** and **E1** do not include mold protrusion. Allowable mold protrusion is 0.254 mm per side. Dimension **D1** and **E1** include mold mismatch and are determined at datum plane **H**.
6. **N** is number of terminals.
7. Package top dimensions are smaller than bottom dimensions by 0.10 millimeters and top of package will not overhang bottom of package.
8. Dimension **b** does not include damber protrusion. Allowable damber protrusion shall be not cause the lead width to exceed the maximum **b** dimension by more than 0.08 mm. Damper can not be located on the lower radius or the foot.
9. All dimensions are in millimeters.
10. These dimensions apply to the flat section of the lead between 0.10 mm and 0.25 mm from the lead tip.
11. This drawing conforms to JEDEC registered outline m2s-026-c, variation BFB.
12. **A1** is defined as the distance from the seating plane to the lowest point of the package body.

Note: Dimensions are in millimeters. For more information on TQ144 dimensions, see [TQFP Dimensions](#), page 54.

2.10 Plastic Quad Flat Pack (PQFP, TQFP, VQFP)

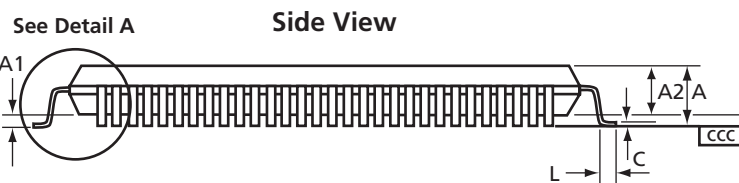
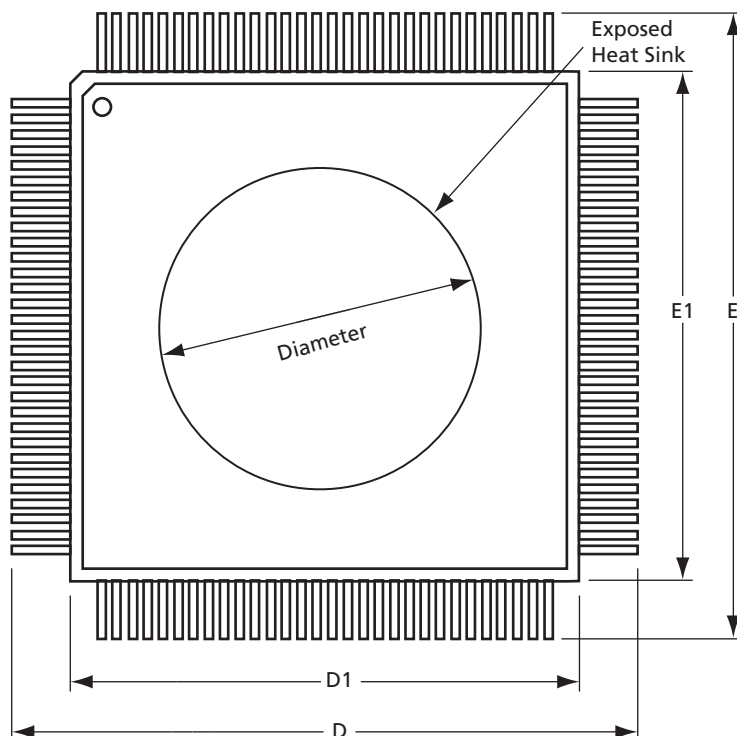

The following figure shows the details and dimensions of Plastic Quad Flat Pack.

Figure 34 • Plastic Quad Flat Pack (PQFP, TQFP, VQFP)**Top View****Side View****Detail A**

Note: Dimensions are in millimeters. For more information on TQ144 dimensions, see [TQFP Dimensions](#), page 54 and [VQFP Dimensions](#), page 55.

2.11 Plastic Quad Flat Pack—Exposed Heatsink (RQFP)

The following figure shows the details and dimensions of plastic quad flat pack exposed heat sink.


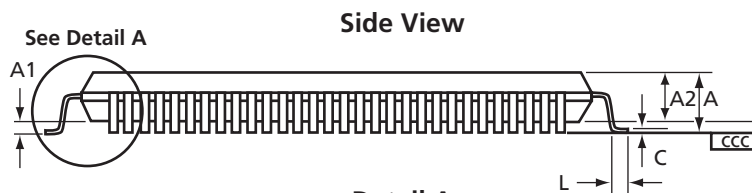
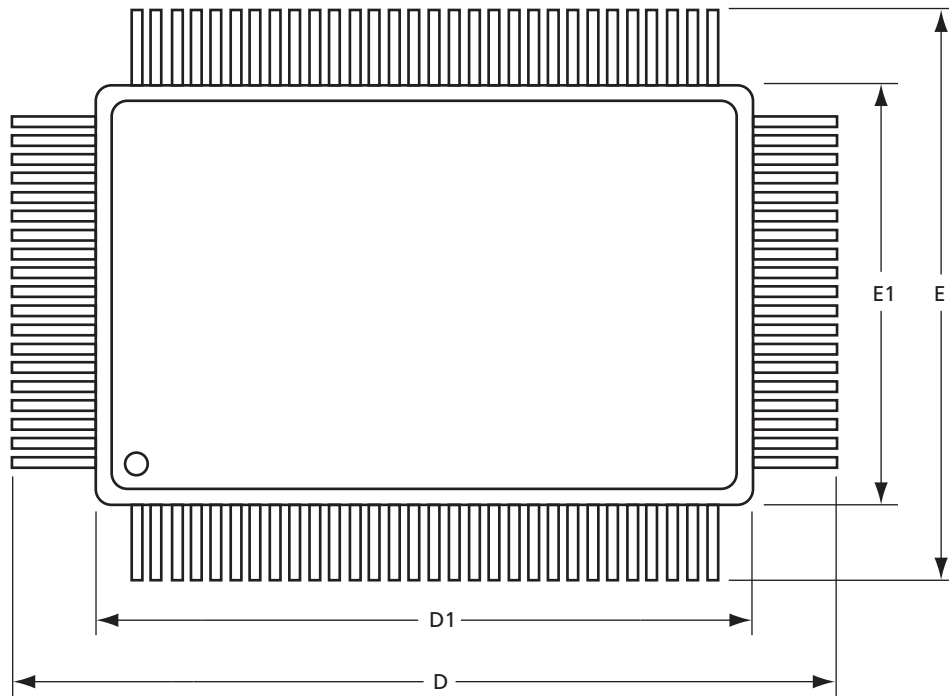
Figure 35 • Plastic Quad Flat Pack—Exposed Heatsink (RQFP)**Top View****Detail A**

Note: Dimensions are in millimeters. For more information on dimensions, see [Plastic Quad Flat Pack \(RQFP/PQFP\) Dimensions](#), page 53.

2.12 Plastic Quad Flat Pack Rectangular Package (PQ100)

The following figure shows the details and dimensions of plastic quad flat pack rectangular package.

Figure 36 • Plastic Quad Flat Pack Rectangular Package (PQ100)
Top View



Note: Dimensions are in millimeters. For more information on dimensions, see [Plastic Quad Flat Pack \(RQFP/PQFP\) Dimensions](#), page 53.

The following table shows the supported devices for or plastic quad flat pack rectangular package.

Table 37 • Supported Devices for Plastic Quad Flat Pack Rectangular Package

Supported Devices								
RQ208	PQ100	PQ144	PQ160	PQ208			RQ240	PQ240
A14V100A	A1010B	A1240A	A1280A	A1280XL*	AX250	A3PE600	A32200DX*	A42MX3
A14100A	A1020B	A1240X	A1280XL ¹	A14V60A	AX500	A3PE1500	A32200DX	6
A32200DX ¹	A1225A	L ¹	A14V25A	A1460A	APA075	A3PE3000	V ¹	
A32300DX ¹	A1225XL		A1425A	A32100DX ¹	APA150	M1A3PE1500		
A32300DX	¹		A14V40A	A32140DX ¹	APA300	M1A3PE3000		
V ¹	A1240XL		A1440A	A32200DX ¹	APA450	A3P250L		
	¹		A14V60A	A32200DX	APA600	A3P1000L		
	A1415A		A1460A	V ¹	APA750	M1A3P600L		
	A1425A		A3265DX ¹	A42MX16	APA1000	M1A3P1000L		
	A3265DX		A32100D	A42MX24	A3P125	A3PE3000L		
	¹		X ¹	A42MX36	A3P250	M1A3PE3000		
	A40MX02		A32140D	A500K050 ¹	A3P400	L		
	A40MX04		X ¹	A500K130 ¹	A3P600	AFS250		
	A42MX09		A42MX09	A500K180 ¹	A3P1000	AFS600		
	A42MX16		A42MX16	A500K270 ¹	M1A3P250	M1AFS250		
			A42MX24	A54SX08	M1A3P400	M1AFS600		
				A54SX16	M1A3P600	M7AFS600		
				A54SX16P	M1A3P100	A2F200		
				A54SX32	0	A2F500		
				A54SX08A	M7A3P100			
				A54SX16A	0			
				A54SX32A				
				A54SX72A				

1. This product is obsolete.

2.12.1 PQFP Dimensions

The following table shows the details and dimensions of plastic quad flat pack (PQFP).

Table 38 • PQFP Dimensions

JEDEC Equivalent	PQ100 MS-022 VAR GC-1			PQ144 MS-022 VAR DC-1			PQ160 MS-022 VAR DD-1		
	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.
A	–	–	3.40		–	4.10	–	–	4.10
A1	0.25	–	0.5	0.25	–	0.50	0.25	0.33	0.50
A2	2.50	2.70	2.9	3.20	3.40	3.60	3.20	3.40	3.60
b	0.22	–	0.40	0.22	–	0.40	0.22	–	0.40
c	0.11	–	0.23	0.11	–	0.23	0.11	–	0.23
D	23.20 BSC			31.20 BSC			31.20 BSC		
D1	20.00 BSC			28.00 BSC			28.00 BSC		
E	17.20 BSC			31.20 BSC			31.20 BSC		
E1	14.00 BSC			28.00 BSC			28.00 BSC		
e	0.65 BSC			0.65 BSC			0.65 BSC		
L	0.73	0.88	1.03	0.73	0.88	1.03	0.73	0.88	1.03

Table 38 • PQFP Dimensions

ccc	0.10			0.10			0.10		
Theta	0	–	7 deg	0	–	7 deg	0	–	7 deg

2.12.2 Plastic Quad Flat Pack (RQFP/PQFP) Dimensions

The following table shows the details and dimensions of plastic quad flat pack.

Table 39 • RQFP/PQFP Dimensions

JEDEC Equivalent	RQ208/PQ208 MS-029 VAR FA-1			RQ240/PQ240 MS-029 VAR GA		
	Min.	Nom.	Max.	Min.	Nom.	Max.
A	–	–	4.10	–	–	4.10
A1	0.25		0.50	0.25	–	0.50
A2	3.20	3.40	3.60	3.20	3.40	3.60
b	0.17	–	0.27	0.17	–	0.27
c	0.09	–	0.20	0.09	–	0.20
D/E	30.60 BSC			34.60 BSC		
D1/E1	28.00 BSC			32.10 BSC		
e	0.50 BSC			0.50 BSC		
L	0.45	0.60	0.75	0.50	0.60	0.75
ccc	0.08			0.08		
Theta	0	3.50	8 deg	0	3.50	8 deg
Diameter	19.82	20.32	20.82	23.63	24.13	24.63

Note: All dimensions are in millimeters.

Note: BSC = Basic spacing between centers.

The following table lists the supported devices for quad.

Table 40 • Supported Devices for Quad Slat (TQ/VQ)

Supported Devices									
TQ64	TQ100	TQ144	TQ176		VQ80	VQ100		VQ128	VQ176
eX64	APA075	A54SX08	A1240A	A3265DXV*	A1010B	A1225XL*	A54SX16	AGLP030	AGLP060
eX128	APA150	A54SX16	A1440A	A32140DX	A10V10B	A1415A	P		
	A54SX08	P	A1460A	V ¹	A1020B	A1425A	A54SX08		
	A	A54SX32	A14V40A	A42MX09	A10V20B	A1440A	AGL030		
	A54SX16	A54SX08	A14V60A	A42MX16	A40MX02	A14V15A	AGL060		
	A	A	A1240XL*	A42MX24	A40MX04	A14V25A	AGL125		
	A54SX32	A54SX16	A1280XL*	A54SX08		A14V40A	AGL250		
	A	A	A1280XLV	A54SX16		A42MX09	AGLN030		
	eX64	A54SX32	*	A54SX16P		A42MX16	AGLN060		
	eX128	A	A1240XLV	A54SX32		A54SX16	AGLN125		
	eX256	APA075	*	A54SX32A			AGLN250		
		A3P060	A3265DX*				A3P030		
		A3P125	A32140DX				A3P060		
		A2F060	*				A3P125		
		M2S005					A3P250		
		M2GL005					M1A3P250		
		M2S010					0		
		M2GL010					A3P250L		
							A3PN030		
							A3PN060		
							A3PN125		
							A3PN250		

1. This product is obsolete.

2.12.3 TQFP Dimensions

The following table lists the dimensions of thin quad flat pack (TQFP).

Table 41 • TQFP Dimensions

JEDEC Equivalent	TQ64 MS-026 VAR BCD			TQ100 MS-026 VAR BED			TQ144 MS-026 VAR BFB			TQ176 MS-026 VAR BCA		
Dimension	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.
A	–	–	1.60	–	–	1.60	–	–	1.60	–	–	1.60
A1	0.05	–	0.15	0.05	–	0.15	0.05	–	0.15	0.05	–	0.15
A2	1.35	1.40	1.45	1.35	1.40	1.45	1.35	1.40	1.45	1.35	1.40	1.45
b	0.17	0.22	0.27	0.17	0.22	0.27	0.17	0.22	0.27	0.17	0.22	0.27
c	0.09	–	0.20	0.09	–	0.20	0.09	–	0.20	0.09	–	0.20
D/E	12.00 BSC			16.00 BSC			22.00 BSC			26.00 BSC		
D1/E1	10.00 BSC			14.00 BSC			20.00 BSC			24.00 BSC		
e	0.50 BSC			0.50 BSC			0.50 BSC			0.50 BSC		
L	0.45	0.60	0.75	0.45	0.60	0.75	0.45	0.60	0.75	0.45	0.60	0.75
ccc	0.08			0.08			0.08			0.10		
Theta	0	3.50 deg	7 deg	0	3.50 deg	7 deg	0	3.50 deg	7 deg	0	3.50 deg	7 deg

Note: All dimensions are in millimeters.

Note: BSC = Basic spacing between centers.

2.12.4 VQFP Dimensions

The following table lists the dimensions of very thin quad flat pack (VQFP).

Table 42 • VQFP Dimensions

JEDEC Equivalent	VQ80 MS-026 VAR AEC			VQ100 MS-026 VAR AED			VQ128 MS-026 VAR AEE ³			VQ176 MS-026 VAR BFC		
Dimension	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.
A	–	–	1.20	–	–	1.20	–	–	1.20	–	–	1.20
A1	0.05	–	0.15	0.05	–	0.15	0.05	0.10	0.15	0.05	0.10	0.15
A2	0.95	1.00	1.05	0.95	1.00	1.05	0.95	1.00	1.05	0.95	1.00	1.05
b	0.22	0.32	0.38	0.17	0.22	0.27	0.13	0.18	0.23	0.13	0.18	0.23
c	0.09	–	0.20	0.09	–	0.20	0.09	–	0.20	0.09	–	0.20
D/E	16.00 BSC			16.00 BSC			16.00 BSC			22.00 BSC		
D1/E1	14.00 BSC			14.00 BSC			14.00 BSC			20.00 BSC		
e	0.65 BSC			0.50 BSC			0.40 BSC			0.40 BSC		
L	0.45	0.60	0.75	0.45	0.60	0.75	0.45	0.60	0.75	0.45	0.60	0.75
ccc	0.10			0.08			0.08			0.08		
Theta	0	3.50 deg	7 deg	0	3.50 deg	7 deg	0	3.50 deg	7 deg	0	3.50 deg	7 deg

Note: All dimensions are in millimeters.

Note: BSC = Basic spacing between centers.

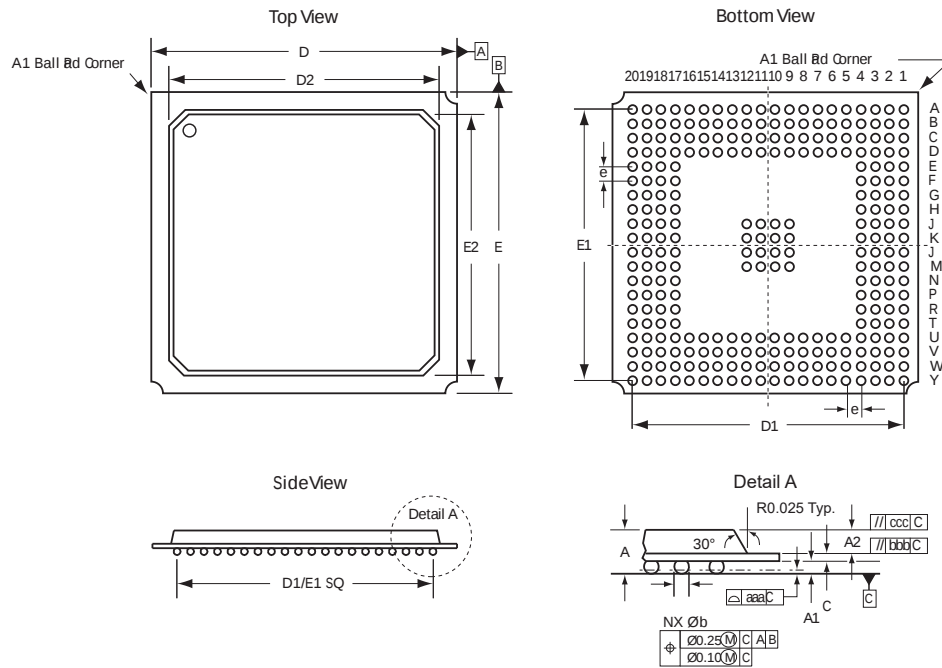
Note: Variation AEE plus 8 leads.

2.13 PBGA

The following figures show package outlines for various packages under PBGA.

2.13.1 BG272

The following figure shows the package outline of BG272.

Figure 37 • Package Outline of BG272

The following table shows the supported devices for BG272.

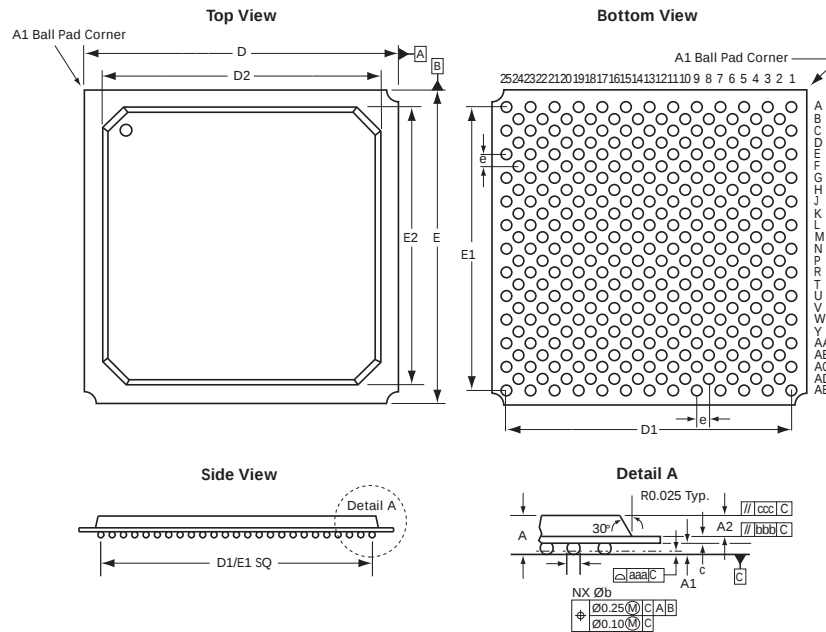
Table 43 • Supported Devices for BG272

Supported Devices	
A42MX36	A500K050*
	A500K130*

Note: This product is obsolete.

2.13.2 BG313

The following figure shows the package outline of BG313.

Figure 38 • Package Outline of BG313

Note: Dimensions are in millimeters. For more information on dimensions, see [PBGA Dimensions](#), page 60.

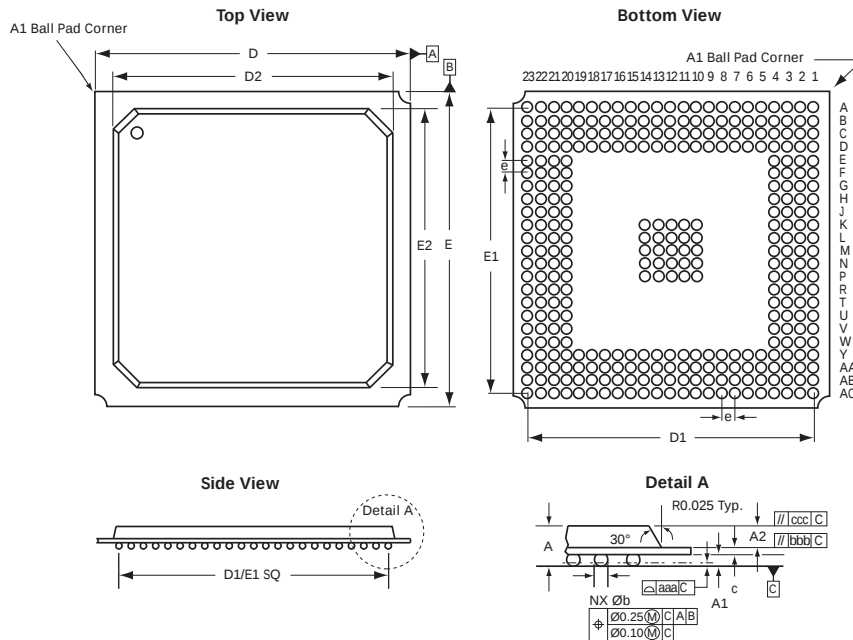
The following table shows the supported devices for BG313.

Table 44 • Supported Devices for BG313

Supported Devices	
A14100A	A54SX32
A14V100A	

2.13.3 BG329

The following figure shows the package outline of BG329.

Figure 39 • Package Outline of BG329

Note: Dimensions are in millimeters. For more information on dimensions, see [PBGA Dimensions](#), page 60.

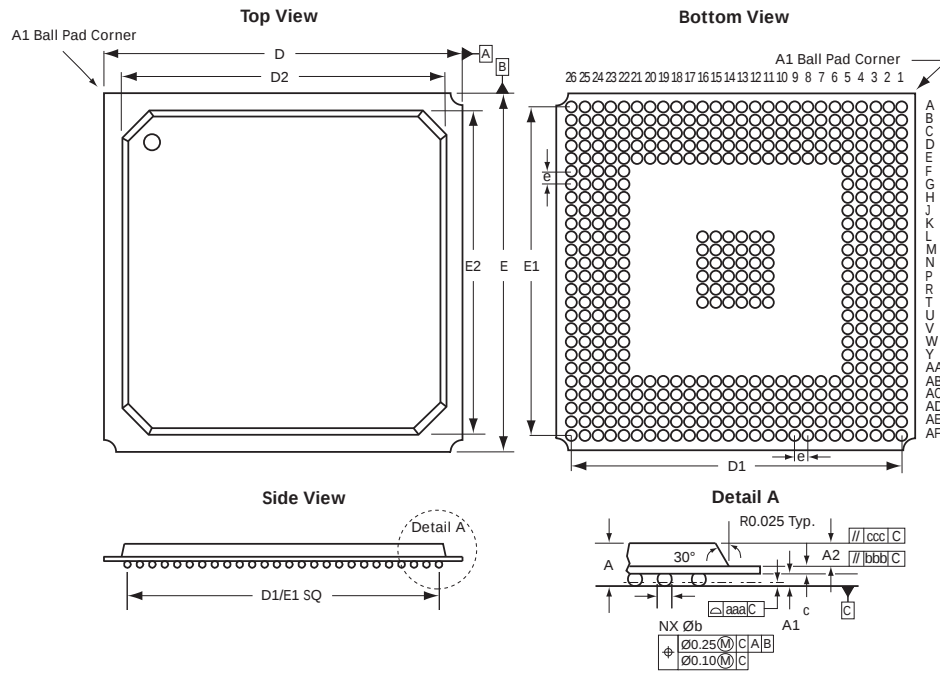
The following table shows the supported devices for BG329.

Table 45 • Supported Devices for BG329

Supported Devices	
A54SX32	A53SX32A

2.13.4 BG456

The following figure shows the package outline of BG456.

Figure 40 • Package Outline of BG456

Note: Dimensions are in millimeters. For more information on dimensions, see [PBGA Dimensions](#), page 60.

The following table shows the supported devices for BG456.

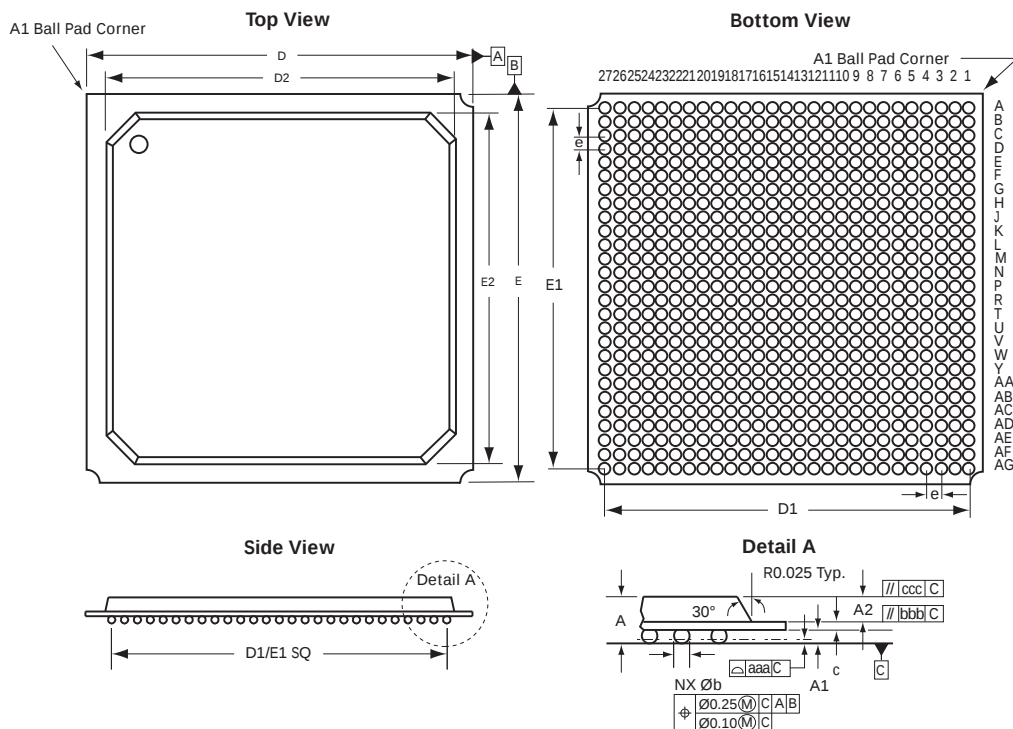
Table 46 • Supported Devices for BG456

Supported Devices	
A500K130 ¹	APA150
A500K180 ¹	APA300
A500K270 ¹	APA450
	APA600
	APA750
	APA1000

1. This product is obsolete.

2.13.5 BG729

The following figure shows the package outline of BG729.

Figure 41 • Package Outline of BG729

Note: Dimensions are in millimeters. For more information on dimensions, see [PBGA Dimensions](#), page 60.

The following table shows the supported devices for BG729.

Table 47 • Supported Devices for BG729

Supported Devices
AX1000

2.13.6 PBGA Dimensions

The following table lists the dimensions of PBGA.

Table 48 • PBGA Dimensions

JEDEC Equivalent	BG727 MS-034 VAR BAL-2			BG313 MS-034			BG329 MS-034 VAR BAN-2			BG456 MS-034 VAR BAR-2		
Dimension	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.
A	2.18	2.33	2.50	2.12	2.33	2.52	2.17	2.33	2.70	2.12	2.33	2.54
A1	0.50	0.60	0.70	0.50	0.60	0.70	0.50	0.60	0.70	0.50	0.60	0.70
A2	1.15	1.17	1.19	1.12	1.17	1.22	1.10	1.20	1.30	1.12	1.17	1.19
aaa	0.20			0.20			0.20			0.20		
b	0.60	0.75	0.90	0.60	0.76	0.90	0.60	0.76	0.90	0.60	0.76	0.90
bbb	0.25			0.25			0.25			0.25		
c	0.53	0.56	0.61	0.53	0.56	0.61	0.53	0.60	0.70	0.51	0.56	0.61
ccc	0.35			0.35			0.35			0.35		
D	26.80	27.00	27.20	34.80	35.00	35.20	30.80	31.00	31.20	34.80	35.00	35.20

Table 48 • PBGA Dimensions

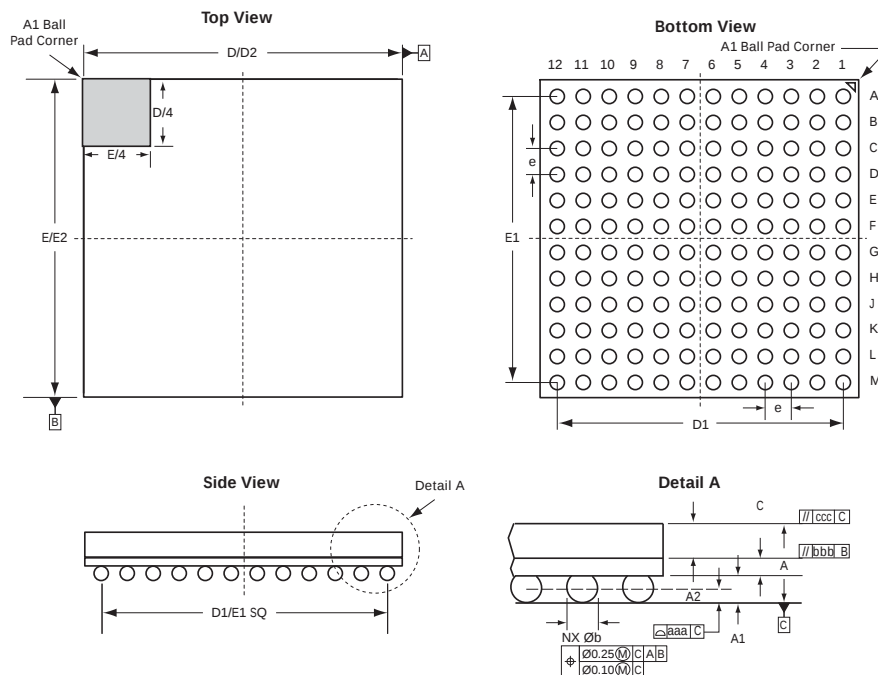
D1	24.13 BSC			30.48 BSC			27.94 BSC			31.75 BSC		
D2	23.90	24.00	24.10	29.50	30.00	30.70	27.90	28.00	28.10	29.80	30.00	30.20
E	26.80	27.00	27.20	34.80	35.00	35.20	30.80	31.00	31.20	34.80	35.00	35.20
E1	24.13 BSC			30.48 BSC			27.94 BSC			31.75 BSC		
E2	23.90	24.00	24.10	29.50	30.00	30.70	27.90	28.00	28.10	29.80	30.00	30.20
e	1.27 typ.			1.27 typ.			1.27 typ.			1.27 typ.		
JEDEC Equivalent	BG729 MS-034 VAR BAR-1											
Dimensions	Min.	Nom.	Max.									
A	2.12	2.33	2.54									
A1	0.50	0.60	0.70									
A2	1.12	1.17	1.19									
aaa	0.20											
b	0.60	0.76	0.90									
bbb	0.25											
c	0.50	0.56	0.62									
ccc	0.35											
D	34.80	35.00	35.20									
D1	33.02 BSC											
D2	29.95	30.00	30.70									
E	34.80	35.00	35.20									
E1	33.02 BSC											
E2	29.95	30.00	30.70									
e	1.27 typ.											

2.14 FBGA

The following figures show package outlines for various packages under FBGA.

2.14.1 FG144

The following figure shows the package outline of FG144.

Figure 42 • Package Outline of FG144

Note: Dimensions are in millimeters. For more information on dimensions, see [Fine Pitch Plastic Ball Grid Array Dimensions](#), page 73.

The following table shows the supported devices for FG144.

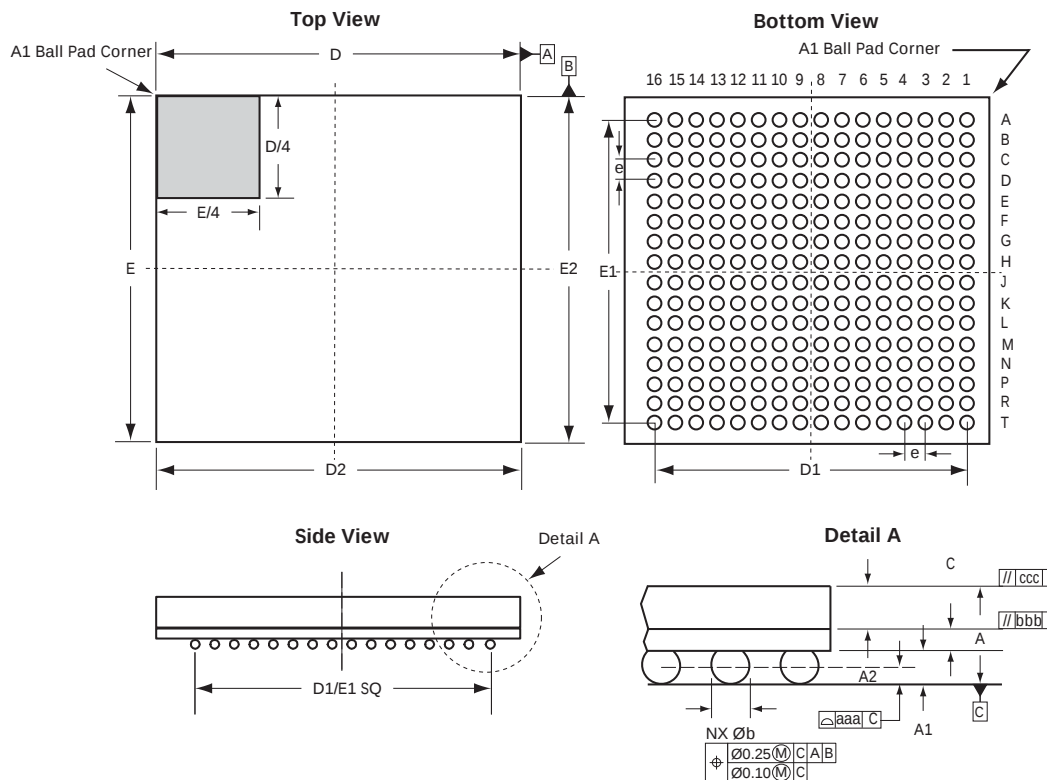
Table 49 • Supported Devices for FG144

Supported Devices						
A54SX08	A500K050 ¹	APA075	A54SX08A	AGL060	A3P060	A3P250L
	A500K130*	APA150	A54SX16A	AGL125	A3P125	A3P600L
		APA300	A54SX32A	AGL250	A3P250	A3P1000L
		APA450		AGL400	A3P400	M1A3P600L/
				AGL600	A3P600	M1A3P1000L
				AGL1000	A3P1000	
				M1AGL250	M1A3P250	
				M1AGL600	M1A3P400	
				M1AGL1000	M1A3P600	
					M1A3P1000	
					M7A3P1000	

1. This product is obsolete.

2.14.2 FG256 MO-192 VAR DAF1

The following figure shows the package outline of FG256 MO-192 VAR DAF1.

Figure 43 • Package Outline of FG256 MO-192 VAR DAF1

Note: Dimensions are in millimeters. For more information on dimensions, see [Fine Pitch Plastic Ball Grid Array Dimensions](#), page 73.

The following table lists the supported devices for FG256 MO-192 VAR DAF1.

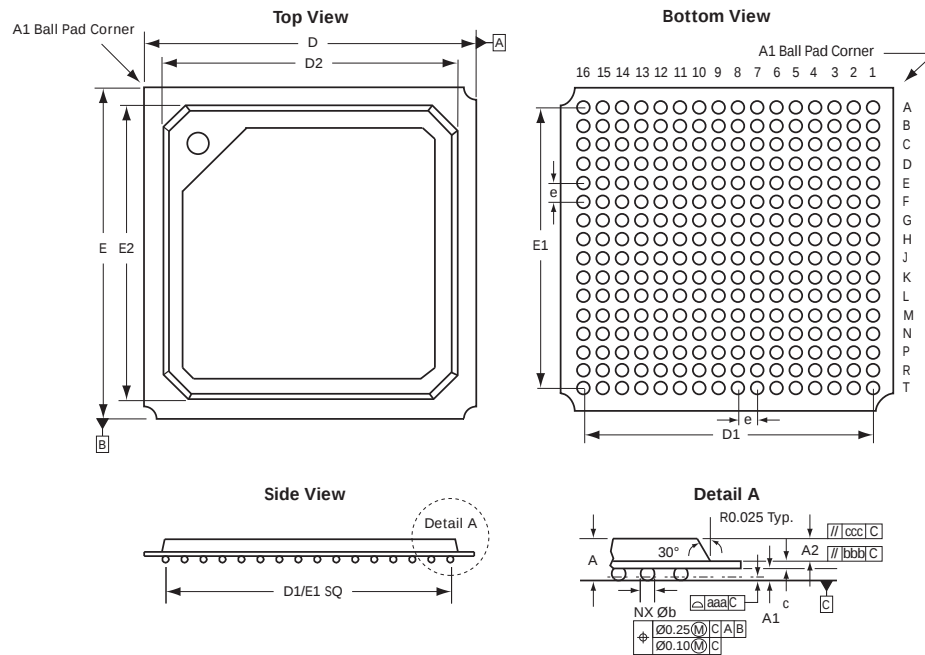
Table 50 • Supported Devices for FG256 MO-192 VAR DAF1

Supported Devices								
A500K130 ¹	APA150	A54SX16A	AX125	AGL400	A3P250	A3P250L	AFS090	A2F060
A500K180*	APA300		AX250	AGL600	A3P400	A3P600L	AFS250	A2F200
A500K270*	APA450			AGL1000	A3P600	A3P1000L	AFS600	A2F500
	APA600			M1AGL600	A3P1000	M1A3P600L	AFS1500	
				M1AGL1000	M1A3P400	M1A3P1000L	M1AFS250	
				AGLE600	M1A3P600		M1AFS600	
					M1A3P1000		M1AFS1500	
					M7A3P1000		M7AFS600	
					A3PE600			

1. This product is obsolete.

2.14.3 FG256 MS-034 VAR AAF-1

The following figure shows the package outline of FG256 MS-034 VAR AAF-1.

Figure 44 • Package Outline of FG256 MS-034 VAR AAF-1

Note: Dimensions are in millimeters. For more information on dimensions, see [Fine Pitch Plastic Ball Grid Array Dimensions](#), page 73.

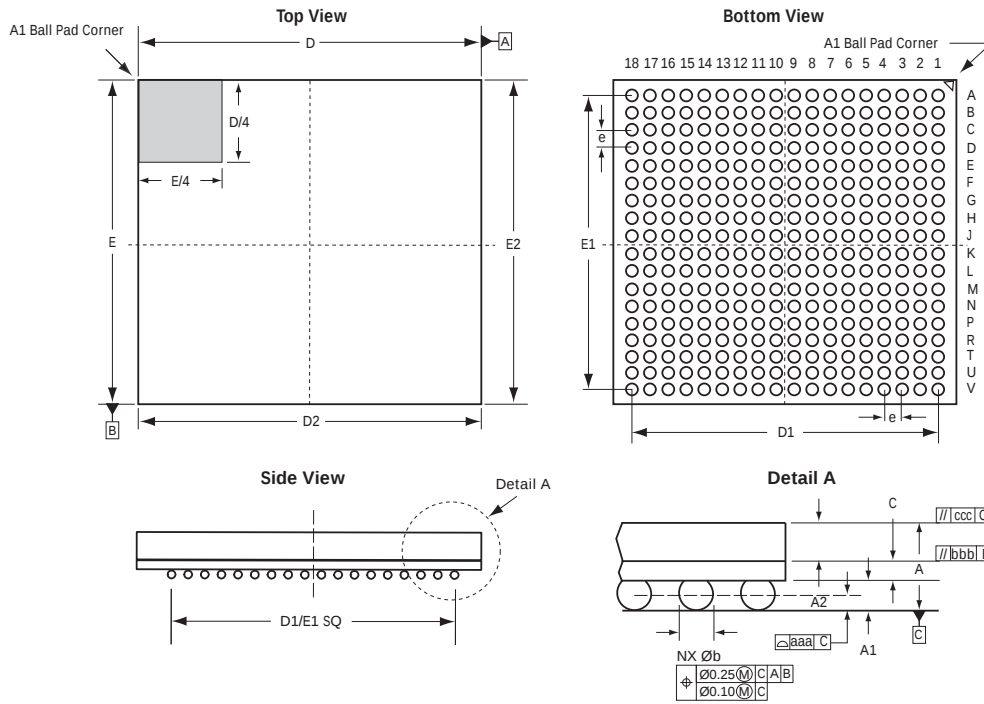
The following table lists the supported devices for FG256 MS-034 VAR AAF-1.

Table 51 • Supported Devices for FG256 MS-034 VAR AAF-1

Supported Devices
A54SX32A
A54SX72A

2.14.4 FG324

The following figure shows the package outline of FG324.

Figure 45 • Package Outline of FG324

Note: Dimensions are in millimeters. For more information on dimensions, see [Fine Pitch Plastic Ball Grid Array Dimensions](#), page 73.

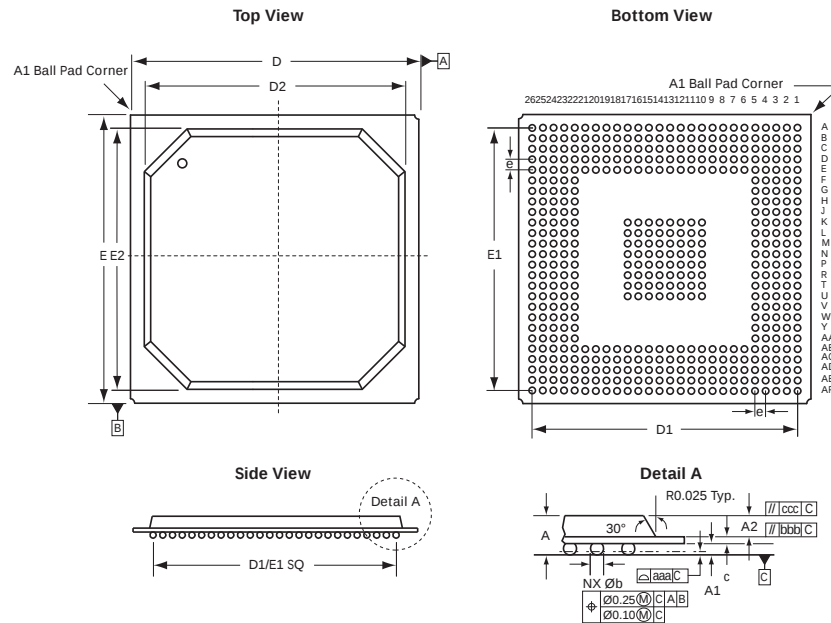
The following table lists the supported devices for FG324.

Table 52 • Supported Devices for FG324

Supported Devices		
AX125	A3PE3000 M1A3PE3000	A3PE3000L M1A3PE3000L

2.14.5 FG484 MS-034 VAR AAL-1

The following figure shows the package outline of FG484 MS-034 VAR AAL-1.

Figure 46 • Package Outline of FG484 MS-034 VAR AAL-1

Note: Dimensions are in millimeters. For more information on dimensions, see [Fine Pitch Plastic Ball Grid Array Dimensions](#), page 73.

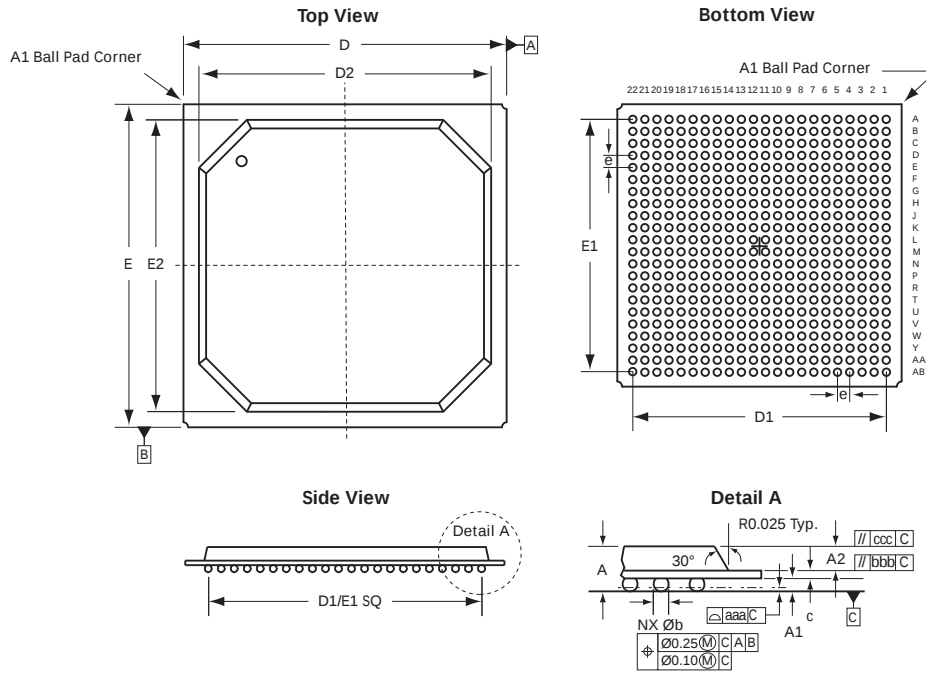
The following table lists the supported devices for FG484 MS-034 VAR AAL-1.

Table 53 • Supported Devices for FG484 MS-034 VAR AAL-1

Supported Devices
A54SX32A
A54SX72A

2.14.6 FG484—Fully Populated MS-034 VAR AAJ-1

The following figure shows the package outline of FG484 Fully Populated MS-034 VAR AAJ-1.

Figure 47 • Package Outline of FG484—Fully Populated MS-034 VAR AAJ-1

Note: Dimensions are in millimeters. For more information on dimensions, see [Fine Pitch Plastic Ball Grid Array Dimensions](#), page 73.

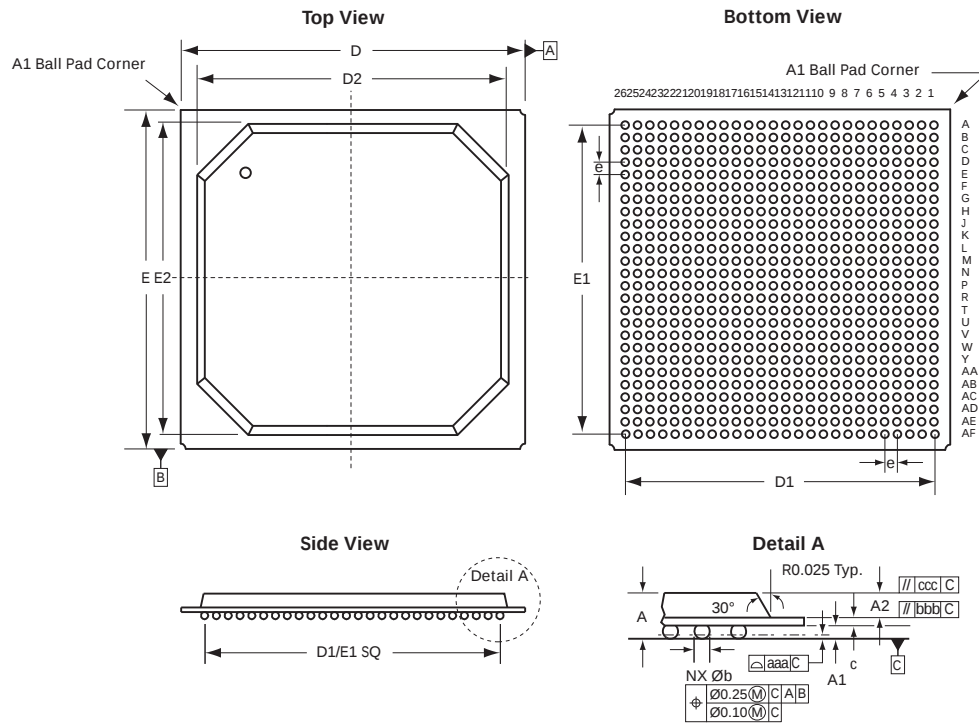
The following table lists the supported devices for FG484—Fully Populated MS-034 VAR AAJ-1.

Table 54 • Supported Devices for FG484—Fully Populated MS-034 VAR AAJ-1

Supported Devices							
APA450	AX250	AGL400	A3P400	A3PE600	A3P600L	AFS600	A2F200
APA600	AX500	AGL600	A3P600	A3PE1500	A3P1000L	AFS1500	A2F500
	AX1000	AGL1000	A3P1000	A3PE3000	M1A3P600L	M1AFS600	
		M1AGL600	M1A3P400	M1A3PE1500	M1A3P1000L	M1AFS1500	
		M1AGL1000	M1A3P600	M1A3PE3000		M7AFS600	
		AGLE600	M1A3P1000	A3PE600L			
		AGLE3000	M7A3P1000	A3PE3000L			
		M1AGLE3000		M1A3PE3000L			

2.14.7 FG676 (Option 1)

The following figure shows the package outline of FG676 (Option 1).

Figure 48 • Package Outline of FG676 (Option 1)

Note: Dimensions are in millimeters. For more information on dimensions, see [FG676 \(Option 1 and 2\) Package Mechanical Drawing Dimensions](#), page 69.

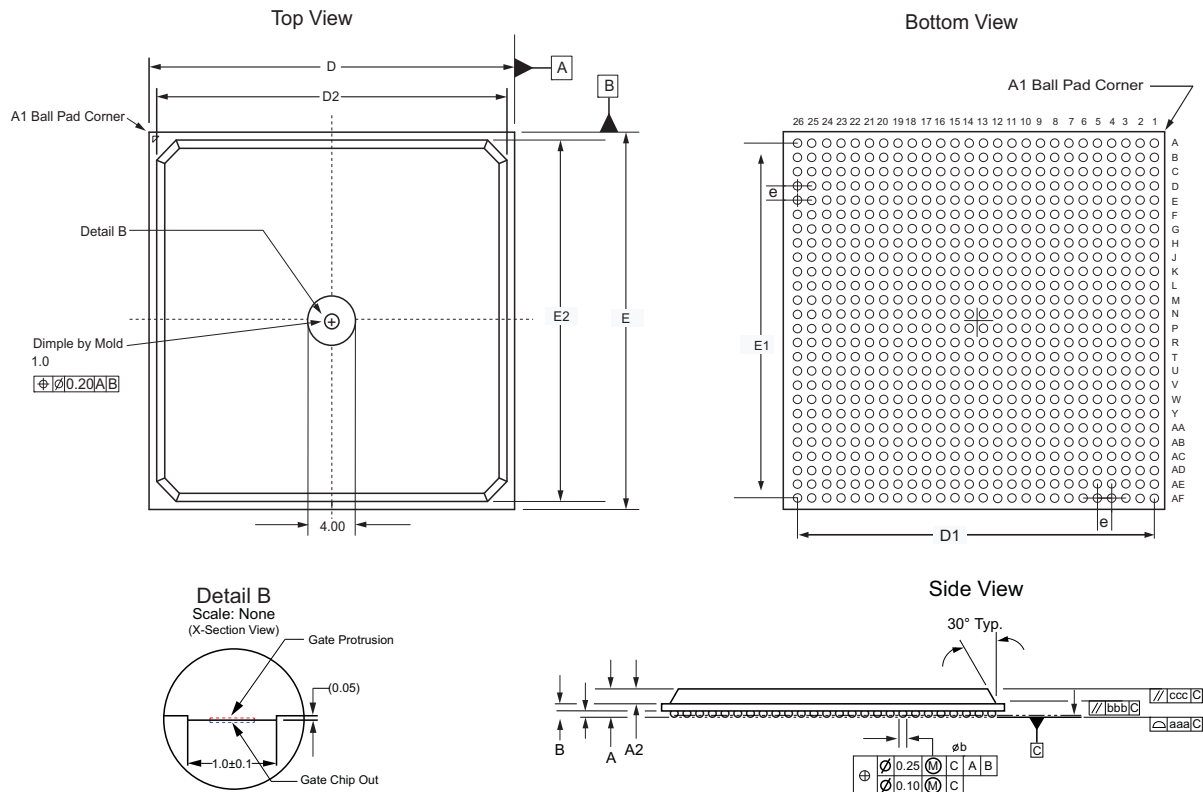
The following table lists the supported devices for FG676 (Option 1).

Table 55 • Supported Devices for FG676 (Option 1)

Supported Devices				
A500K2701	APA600	AX500	A3PE1500	AFS1500
	APA750	AX1000	M1A3PE1500	M1AFS1500

2.14.8 FG676 (Option 2)

The following figure shows the package outline of FG676 (Option 2).

Figure 49 • Package Outline of FG676 (Option 2)

Note: Dimensions are in millimeters. For more information on dimensions, see [FG676 \(Option 1 and 2\) Package Mechanical Drawing Dimensions](#), page 69.

The following table lists the supported devices for FG676 (Option 2).

Table 56 • Supported Devices for FG676 (Option 2)

Supported Devices	
SmartFusion [®] 2 (M2S090, M2S060)	IGLOO [®] 2 (M2GL090, M2GL060)

2.14.9 FG676 (Option 1 and 2) Package Mechanical Drawing Dimensions

The following table lists the dimensions of FG676 (Option 1 and 2) Package Mechanical Drawing.

Table 57 • Dimensions of FG676 (Option 1 and 2) Package Mechanical Drawing

JEDEC Equivalent	FG676 (Option 1), page 67 27mm X 27mm, 1.0mm Pitch, 676 Solder Balls, PBGA			FG676 (Option 2), page 68 27mm X 27mm, 1.0mm Pitch, 676 Solder Balls, PBGA		
	Min.	Nom.	Max.	Min.	Nom.	Max.
A	2.02	2.23	2.44	2.02	2.23	2.44
A1	0.40	0.50	0.60	0.40	0.50	0.60
A2	1.12	1.17	1.22	1.12	1.17	1.22
aaa	0.20			0.15		
b	0.50	0.63	0.70	0.50	0.61	0.70

Table 57 • Dimensions of FG676 (Option 1 and 2) Package Mechanical Drawing

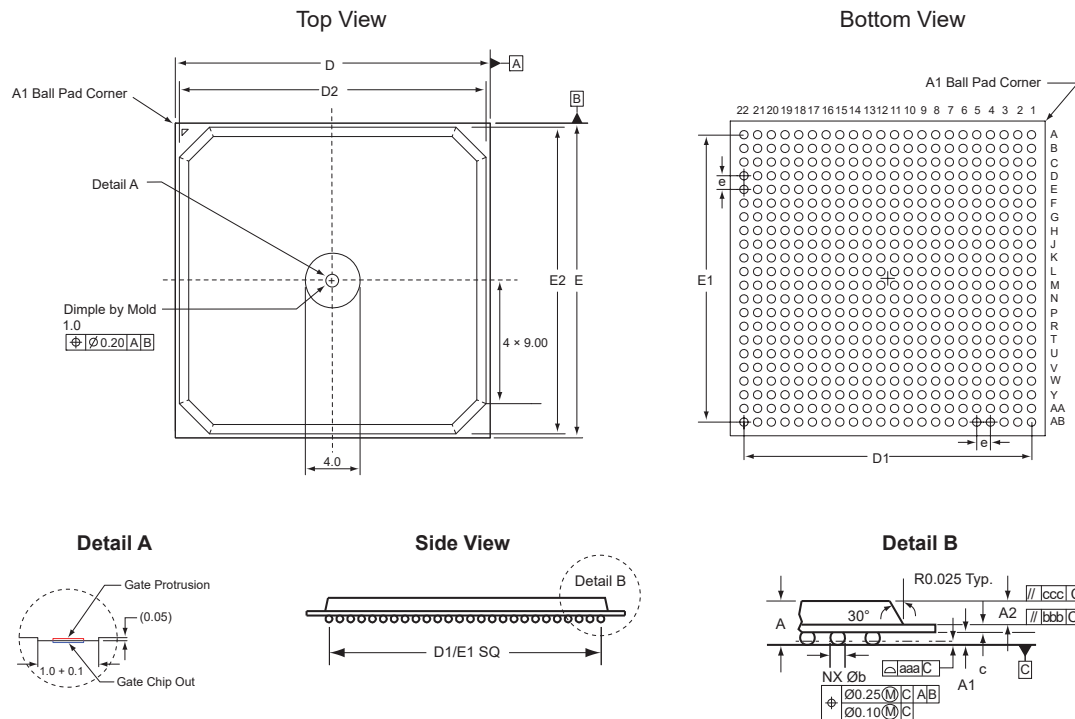
bbb	0.25			0.25		
c	0.50	0.56	0.62	0.50	0.56	0.62
ccc	0.35			0.35		
D	26.80	27.00	27.20	26.80	27.00	27.20
D1	25.00 BSC			25.00 BSC		
D2	23.95	24.00	24.70	25.65	25.70	26.05
E	26.80	27.00	27.20	26.80	27.00	27.20
E1	25.00 BSC			25.00 BSC		
E2	23.95	24.00	24.70	25.65	25.70	26.05
e	1.00 typ.			1.00 typ.		

Note: All dimensions are in millimeters.

Note: BSC = Basic spacing between centers.

2.14.10 FG484—Fully Populated MS-034 VAR AAJ-1, Larger Mold Cap Size

The following figure shows package outlines of FG484 Fully Populated MS-034 VAR AAJ-1, larger mold cap size.

Figure 50 • Package Outline of FG484 MS-034 VAR AAJ-1

The following table lists the supported devices for FG484 MS-034 VAR AAJ-1.

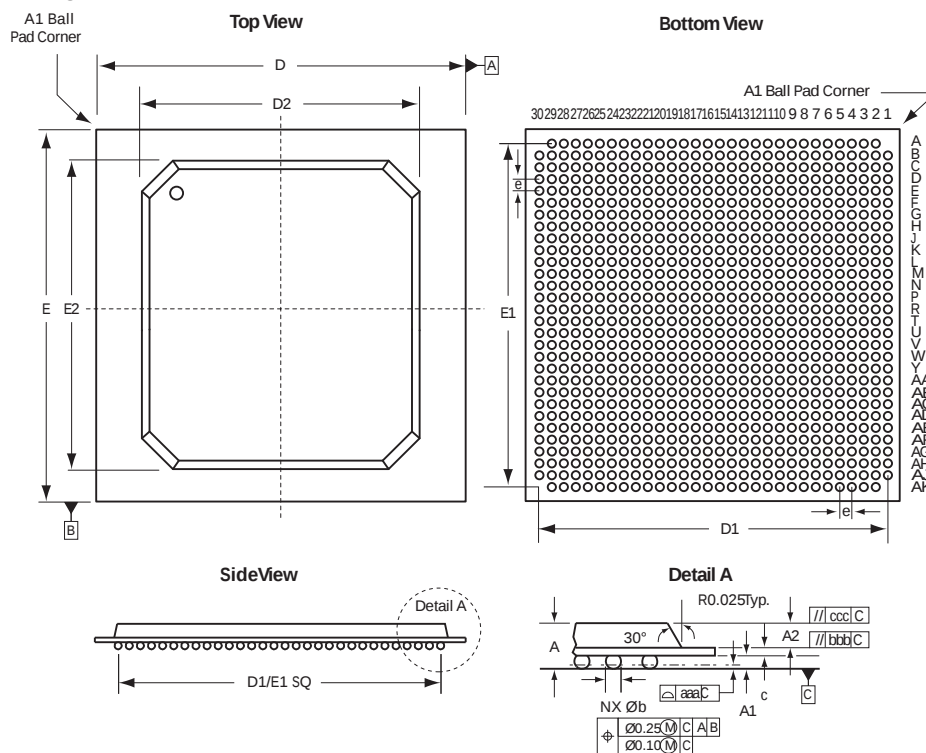
Table 58 • Supported Devices for FG484 MS-034 VAR AAJ-1

Supported Devices	
M2S005, M2S005S	M2GL005, M2GL005S
M2S010, M2S010T, M2S010TS	M2GL010, M2GL010T, M2GL010TS
M2S025, M2S025T, M2S025TS	M2GL025, M2GL025T, M2GL025TS
M2S050, M2S050T, M2S050TS	M2GL050, M2GL050T, M2GL050TS
M2S090, M2S090T, M2S090TS	M2GL090, M2GL090T, M2GL090TS
M2S060, M2S060T, M2S060TS	M2GL060, M2GL060T, M2GL060TS

2.14.11 FG896

The following figure shows package outlines of FG896.

Figure 51 • Package Outline of FG896



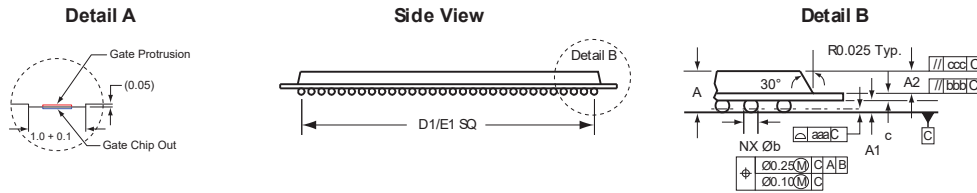
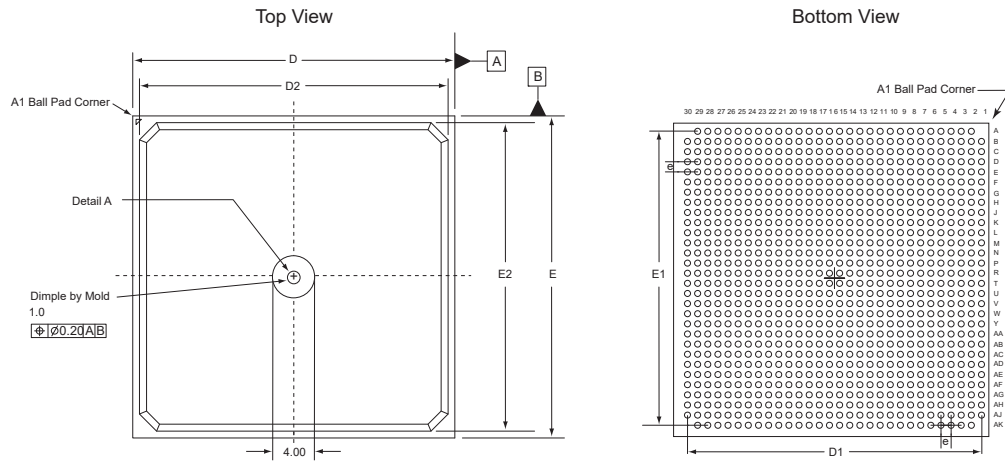
The following table lists the supported devices for FG896.

Table 59 • Supported Devices for FG896

Supported Devices	
M2S050, M2S050S, M2S050TS	M2GL050, M2GL050S, M2GL050TS

2.14.12 FG896—Larger Mold Cap Size

The following figure shows the package outline of larger mold cap size for FG896.

Figure 52 • Package Outline of FG896 Larger Mold Cap Size

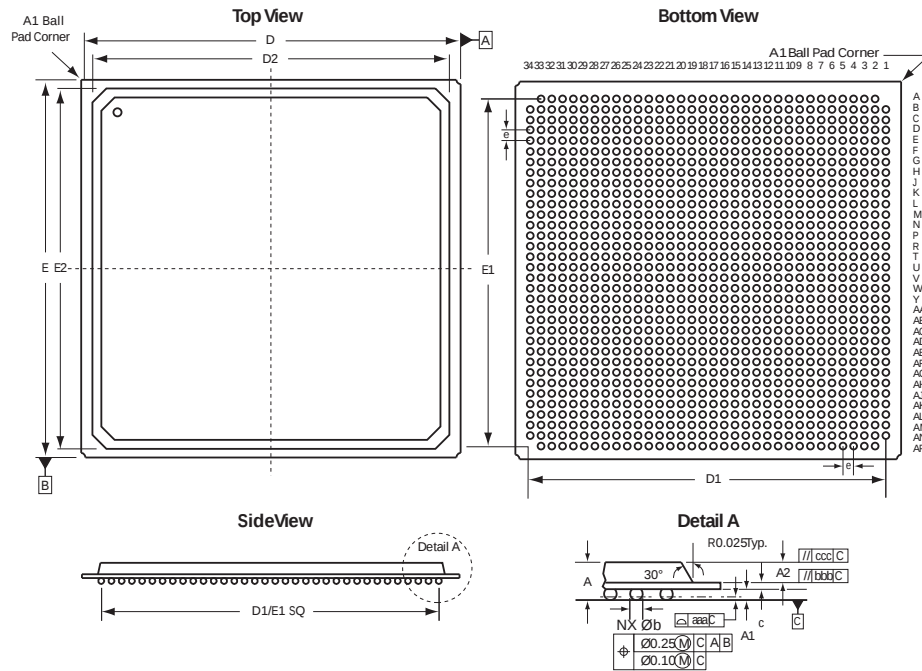
The following table lists the supported devices for FG896 larger mold cap size.

Table 60 • Supported Devices for FG896 Larger Mold Cap Size

Supported Devices	
M2S050, M2S050S, M2S050TS	M2GL050, M2GL050S, M2GL050TS

2.14.13 FG1152

The following figure shows the package outline of FG1152.

Figure 53 • Package Outline of FG1152

Note: Dimensions are in millimeters. For more information on dimensions, see [Fine Pitch Plastic Ball Grid Array Dimensions](#), page 73.

The following table lists the supported devices for FG1152.

Table 61 • Supported Devices for FG1152

Supported Devices	
APA1000	AX2000

2.14.14 Fine Pitch Plastic Ball Grid Array Dimensions

The following table lists the details and dimensions for FG144, FG256, and FG324.

Table 62 • Fine Pitch Plastic Ball Grid Array Dimensions for FG144, FG256, and FG324

JEDEC Equivalent	FG144, page 61 MO-192 VAR DAD-1			FG256 MO-192 VAR DAF1, page 62 MO-192 VAR DAF1			FG256 MS-034 VAR AAF-1, page 63 MS-034 VAR AAF-1			FG324, page 64 MS-034 VAR AAG-1		
	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.
A	1.35	1.45	1.55	1.35	1.60	1.70	1.55	1.76	1.97	1.48	1.63	1.78
A1	0.35	0.40	0.45	0.25	0.40	—	0.30	0.40	0.50	0.33	0.38	0.43
A2	0.65	0.70	0.75	0.65	0.70	0.75	0.75	0.80	0.85	0.65	0.70	0.75
aaa	0.10			0.12			0.20			0.20		
b	0.45	0.50	0.55	0.45	0.50	0.55	0.40	0.50	0.60	0.49	0.54	0.59
bbb	0.25			0.25			0.25			0.25		
c	—	0.35	—	0.40	0.50	0.60	0.50	0.56	0.62	0.50	0.55	0.60
ccc	0.35			0.35			0.35			0.35		
D	12.80	13.00	13.20	16.80	17.00	17.20	16.80	17.00	17.20	18.80	19.00	19.20

Table 62 • Fine Pitch Plastic Ball Grid Array Dimensions for FG144, FG256, and FG324

D1	11.00 BSC			15.00 BSC			15.00 BSC			17.00 BSC		
D2	12.80	13.00	13.20	16.80	17.00	17.20	14.80	15.00	15.20	18.80	19.00	19.20
E	12.80	13.00	13.20	16.80	17.00	17.20	16.80	17.00	17.20	18.80	19.00	19.20
E1	11.00 BSC			15.00 BSC			15.00 BSC			17.00 BSC		
E2	12.80	13.00	13.20	16.80	17.00	17.20	14.80	15.00	15.20	18.80	19.00	19.20
e	1.00 typ.			1.00 typ.			1.00 typ.			1.00 typ.		

Note: All dimensions are in millimeters.

Note: BSC = Basic spacing between centers.

The following table lists the details and dimensions for FG484.

Table 63 • Fine Pitch Plastic Ball Grid Array Dimensions for FG484

JEDEC Equivalent	FG484 MS-034 VAR AAL-1, page 65			FG484—Fully Populated MS-034 VAR AAJ-1, page 66			FG484—Fully Populated MS-034 VAR AAJ-1, Larger Mold Cap Size, page 70		
	MS-034 VAR AAL-1			(23x23 Fully Populated) MS-034 VAR AAJ-1			(23x23 Fully Populated) MS-034 VAR AAJ-1 with Larger Mold Cap		
Dimension	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.
A	2.02	2.23	2.44	2.02	2.23	2.44	2.02	2.23	2.44
A1	0.40	0.50	0.60	0.40	0.50	0.60	.040	.050	.060
A2	1.12	1.17	1.22	1.12	1.17	1.22	1.12	1.17	1.22
aaa	0.20			0.20			0.15		
b	0.50	0.63	0.70	0.50	0.63	0.70	0.50	0.61	0.70
bbb	0.25			0.25			0.25		
c	0.50	0.56	0.62	0.50	0.56	0.62	0.50	0.56	0.62
ccc	0.35			0.35			0.35		
D	26.80	27.00	27.20	22.80	23.00	23.20	22.80	23.00	23.20
D1	25.00 BSC			21.00 BSC			21.00 BSC		
D2	23.80	24.00	24.20	19.45	19.50	20.20	22.35	22.40	22.75
E	26.80	27.00	27.20	22.80	23.00	23.20	22.80	23.00	23.20
E1	25.00 BSC			21.00 BSC			21.00 BSC		
E2	23.80	24.00	24.20	19.45	19.50	20.20	22.35	22.40	22.75
e	1.00 typ.			1.00 typ.			1.00 typ.		

Note: All dimensions are in millimeters.

Note: BSC = Basic spacing between centers.

The following table lists the details and dimensions for FG896 and FG1152.

Table 64 • Fine Pitch Plastic Ball Grid Array Dimensions for FG896 and FG1152

JEDEC Equivalent	FG896, page 71 MS-034 VAR AAN-1			FG896, page 71 MS-034 VAR AAN-1 with Larger Mold Cap			FG1152, page 72 MS-034 VAR AAR-1		
	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.
A	2.02	2.23	2.44	2.02	2.23	2.44	2.02	2.23	2.44
A1	0.40	0.50	0.60	0.40	0.50	0.60	0.40	0.50	0.60
A2	1.12	1.17	1.22	1.12	1.17	1.22	1.12	1.17	1.22
aaa	0.20			0.15			0.20		
b	0.50	0.63	0.70	0.50	0.61	0.70	0.50	0.63	0.70
bbb	0.25			0.25			0.25		
c	0.50	0.56	0.62	0.50	0.56	0.62	0.50	0.56	0.62
ccc	0.35			0.35			0.35		
D	30.80	31.00	31.20	30.80	31.00	31.20	34.80	35.00	35.20
D1	29.00 BSC			29.00 BSC			33.00 BSC		
D2 (option 1) ¹	25.95	26.00	26.70	29.65	29.70	30.05	33.65	33.70	34.20
D2 (option 2) ³	28.80	29.00	29.20						
E	30.80	31.00	31.20	30.80	31.00	31.20	34.80	35.00	35.20
E1	29.00 BSC			29.00 BSC			33.00 BSC		
E2 (option 1) ³	25.95	26.00	26.70	29.65	29.70	30.05	33.65	33.70	34.20
E2 (option 2) ³	28.80	29.00	29.20						
e	1.00 typ.			1.00 typ.			1.00 typ.		

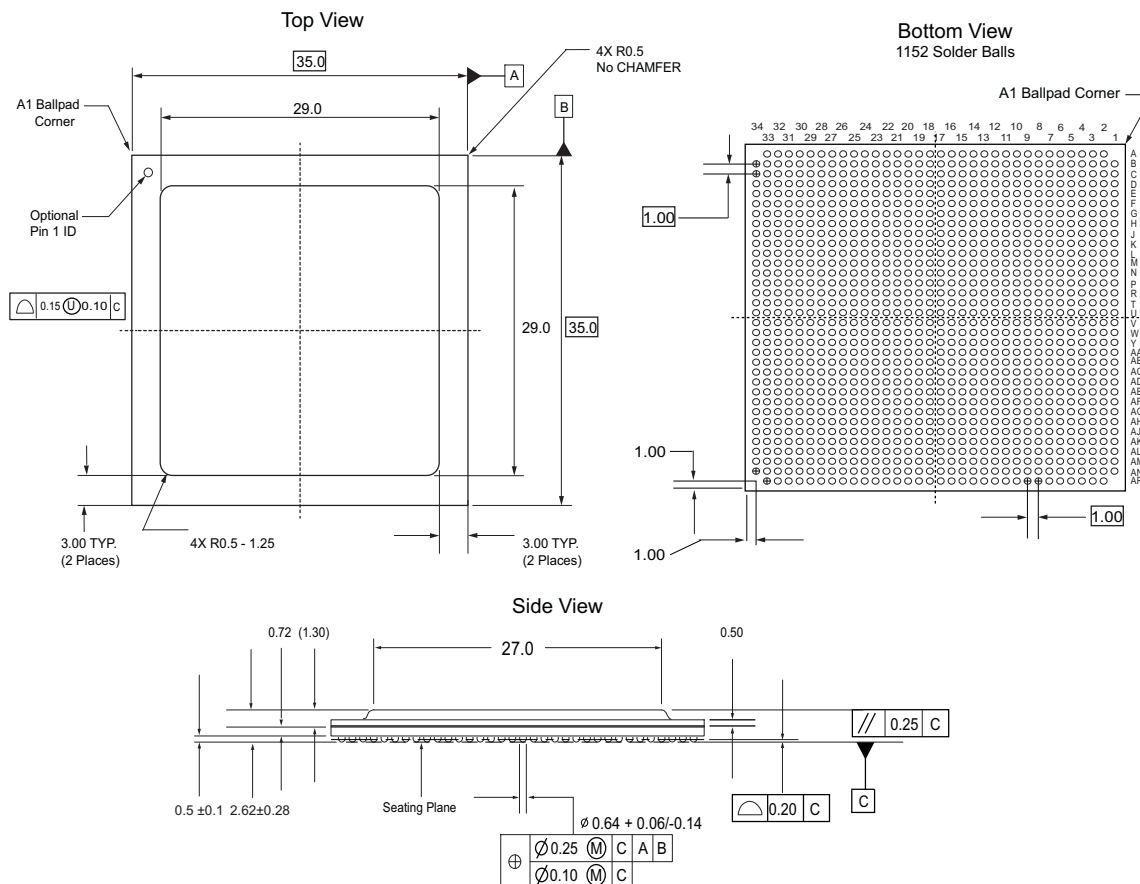
1. As per JEDEC specification MS-034, a different lid size is allowed (D2/E2) for FG896.

Note: All dimensions are in millimeters.

Note: BSC = Basic spacing between centers.

2.14.15 FC1152

The following figure shows the package outline of FC1152.

Figure 54 • Package Outline of FC1152

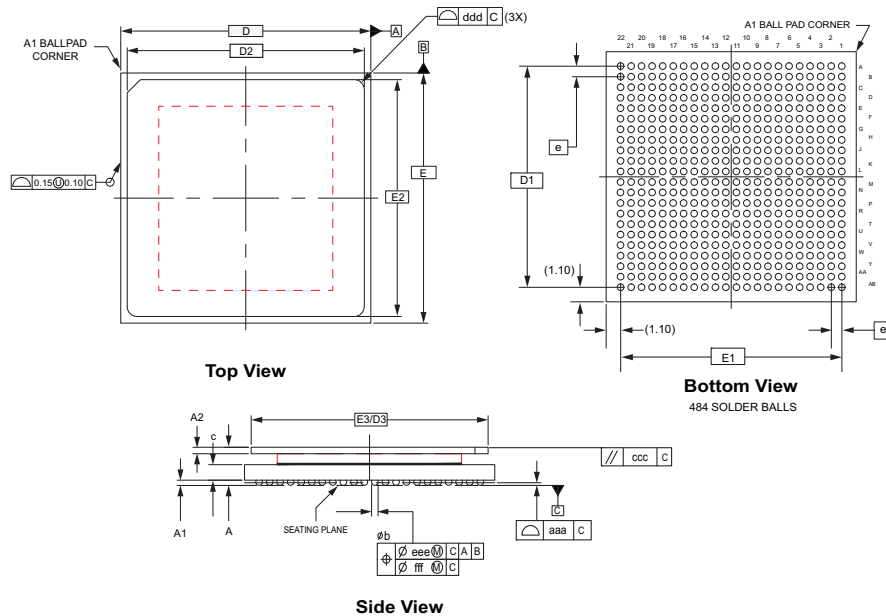
The following table lists the supported devices for FC1152.

Table 65 • Supported Devices for FC1152

Supported Devices	
SmartFusion [®] 2 (M2S150)	IGLOO [®] 2 (M2GL150)

2.14.16 FCV484

The following figure shows the package outline of FCV484.

Figure 55 • Package Outline of FCV484

Note: Dimensions are in millimeters. For more information on dimensions, see [FCV484 Package Mechanical Drawing Dimensions](#), page 77.

The following table lists the supported devices for supported devices for FCV484.

Table 66 • Supported Devices for FCV484

Supported Devices	
SmartFusion 2 (M2S150)	IGLOO 2 (M2GL150)

2.14.17 FCV484 Package Mechanical Drawing Dimensions

The following table shows the details and dimensions of FCV484 package mechanical drawing.

Table 67 • FCV484 Package Mechanical Drawing Dimensions

JEDEC Equivalent	FCV484, page 76		
Dimension	Min.	Nom.	Max.
A	2.85	3.00	3.15
A1	0.30	0.40	0.50
A2	0.50		
aaa	0.20		
b	0.45	0.50	0.55
ccc	0.25		
D	19.00		
D1	16.80 BSC		
D2	18.00 REF		

Table 67 • FCV484 Package Mechanical Drawing Dimensions

D3	18.00 REF
E	19.00
E1	16.80 BSC
E2	18.00 REF
E3	18.00 REF
e	.80 BSC
eee	0.15
fff	0.08

Note: All dimensions are in millimeters.

Note: BSC = Basic spacing between centers.

2.14.18 FC1152 Package Mechanical Drawing Dimensions

The following table shows the dimensions of FC1152.

Table 68 • Dimensions of FC1152

JEDEC Equivalent	FC1152, page 75		
Dimension	Min.	Nom.	Max.
A	2.34	2.62	2.90
A1	0.40	0.50	0.60
A2	0.8		
aaa	0.20		
b	0.50	0.64	0.70
ccc	0.25		
D	34.85	35.00	35.15
D1	33.00 BSC		
D2	29.00 REF		
D3	27.00 REF		
E	34.85	35.00	35.15
E1	33.00 BSC		
E2	29.00 REF		
E3	27.00 REF		
e	1.00 BSC		
eee	0.25		
fff	0.10		

Note: All dimensions are in millimeters.

Note: BSC = Basic spacing between centers.

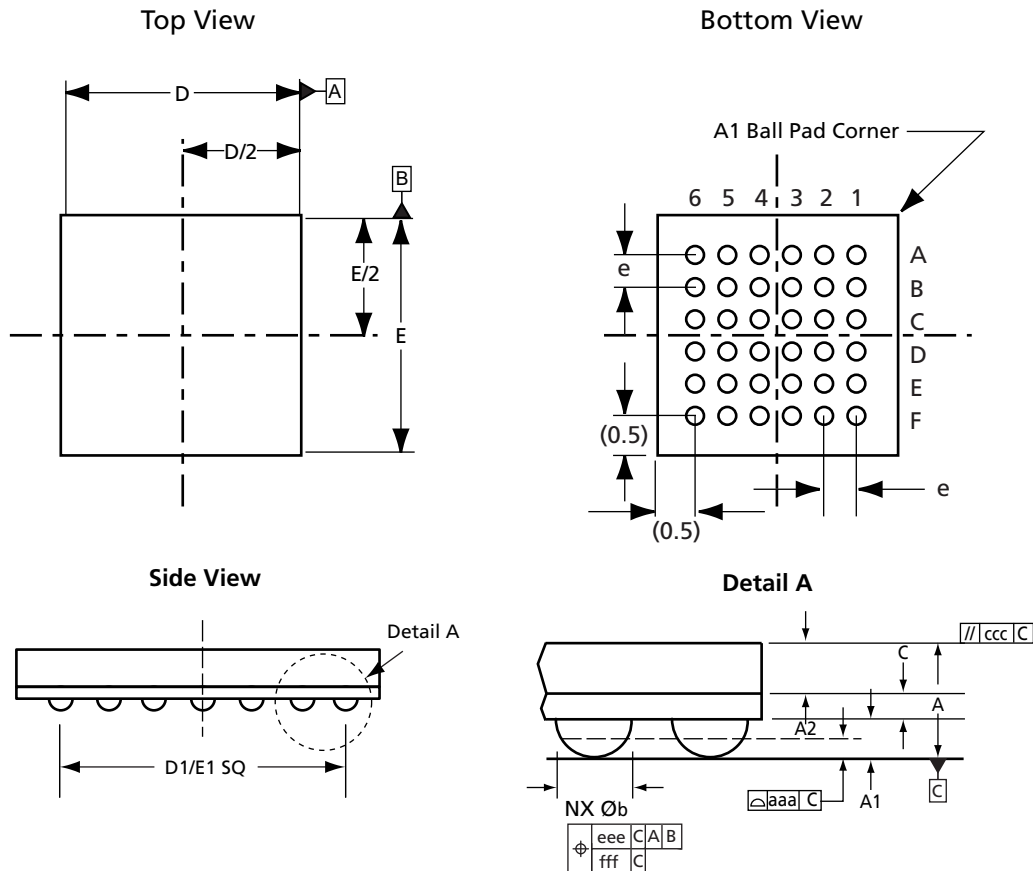
2.15 Chip Scale Package (UC/CS/VF)

The following figures show package outlines for various packages under chip scale package.

2.15.1 UC36

The following figure shows the package outline of UC36.

Figure 56 • Package Outline of UC36



Note: Dimensions are in millimeters. For more information on dimensions, see [Chip Scale Package Dimensions](#), page 93.

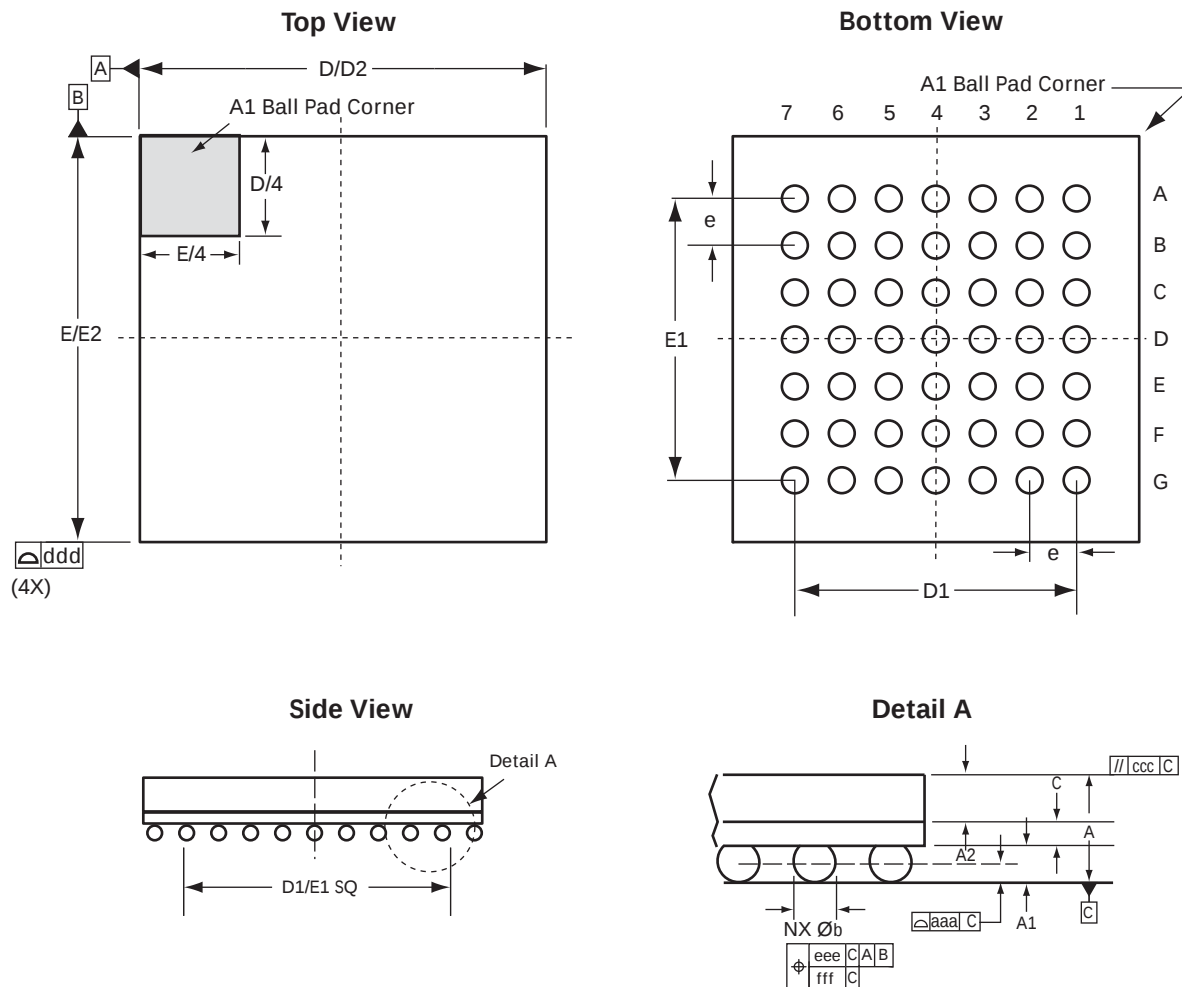
The following table shows the supported devices for UC36.

Table 69 • Supported Devices for UC36

Supported Devices
AGLN010

2.15.2 CS49

The following figure shows the package outline of CS49.

Figure 57 • Package Outline of CS49

Note: Dimensions are in millimeters. For more information on dimensions, see [Chip Scale Package Dimensions](#), page 93.

The following table shows the supported devices for CS49.

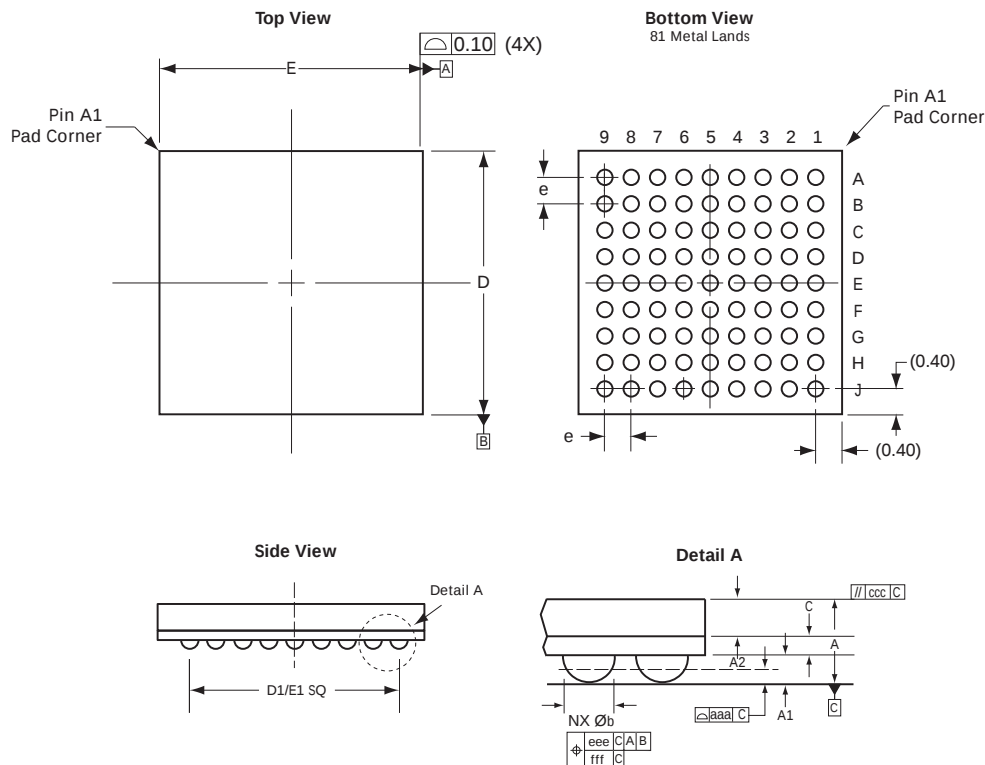
Table 70 • Supported Devices for CS49

Supported Devices
eX64 ¹
eX128 ¹

1. This product is obsolete.

2.15.3 UC81

The following figure shows the package outline of UC81.

Figure 58 • Package Outline of UC81

Note: Dimensions are in millimeters. For more information on dimensions, see [Chip Scale Package Dimensions](#), page 93.

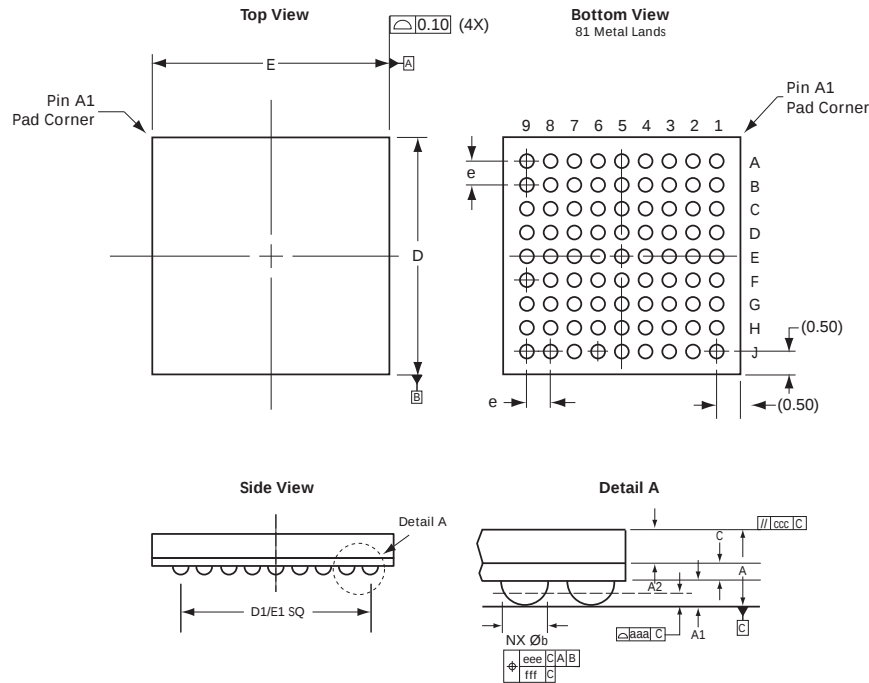
The following table shows the supported devices for UC81.

Table 71 • Supported Devices for UC81

Supported Devices	
AGL030	AGLN020
	AGLN030

2.15.4 CS81

The following figure shows the package outline of CS81.

Figure 59 • Package Outline of CS81

Note: Dimensions are in millimeters. For more information on dimensions, see [Chip Scale Package Dimensions](#), page 93.

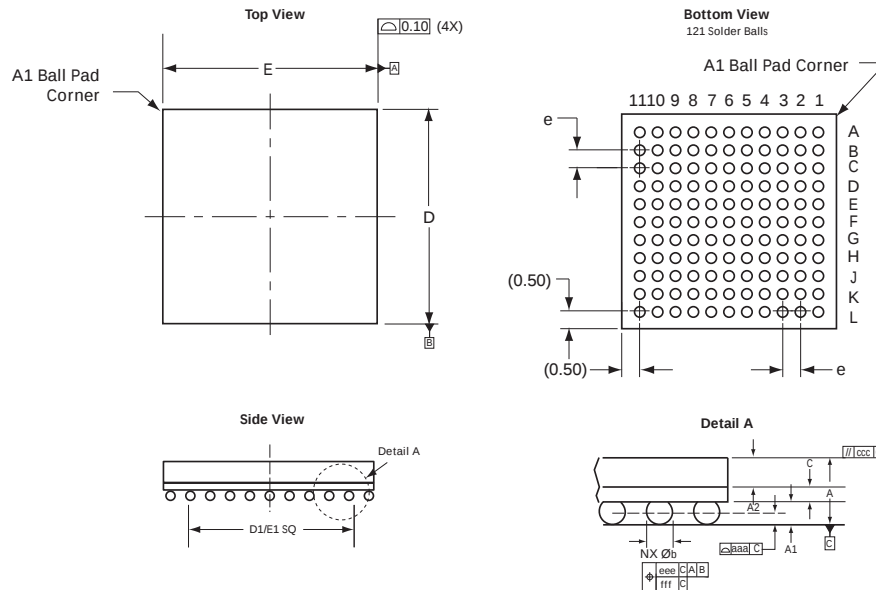
The following table shows the supported devices for CS81.

Table 72 • Supported Devices for CS81

Supported Devices	
AGL030	AGLN020
AGL250	AGLN030
	AGLN060
	AGLN125
	AGLN250

2.15.5 CS121

The following figure shows the package outline of CS121.

Figure 60 • Package Outline of CS121

Note: Dimensions are in millimeters. For more information on dimensions, see [Chip Scale Package Dimensions](#), page 93.

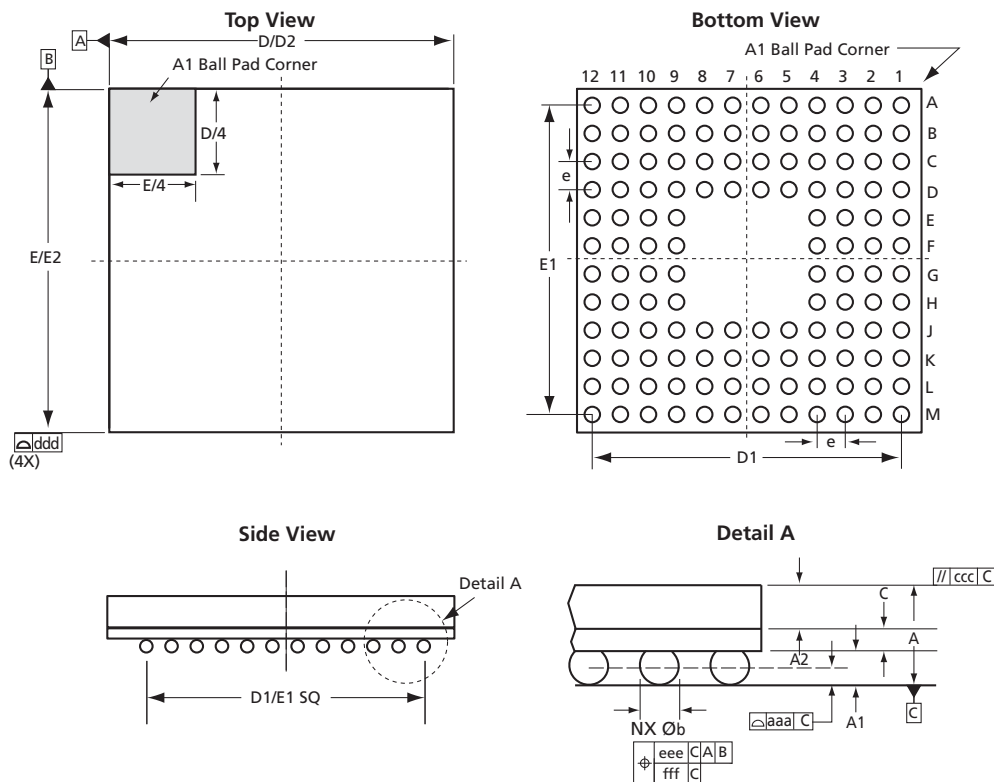
The following table shows the supported devices for CS121.

Table 73 • Supported Devices for CS121

Supported Devices
AGL060

2.15.6 CS128

The following figure shows the package outline of CS128.

Figure 61 • Package Outline of CS128

Note: Dimensions are in millimeters. For more information on dimensions, see [Chip Scale Package Dimensions](#), page 93.

The following table shows the supported devices for CS128.

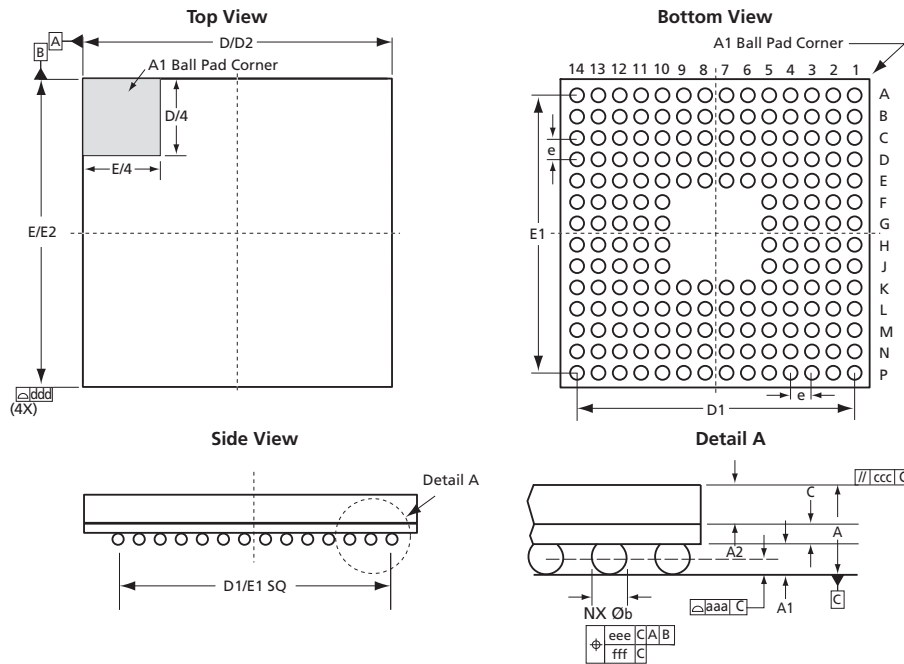
Table 74 • Supported Devices for CS128

Supported Devices
eX64 ¹
eX128 ¹
eX256 ¹

1. This product is obsolete

2.15.7 CS180

The following figure shows the package outline of CS180.

Figure 62 • Package Outline of CS180

Note: Dimensions are in millimeters. For more information on dimensions, see [Chip Scale Package Dimensions](#), page 93.

The following table shows the supported devices for CS180.

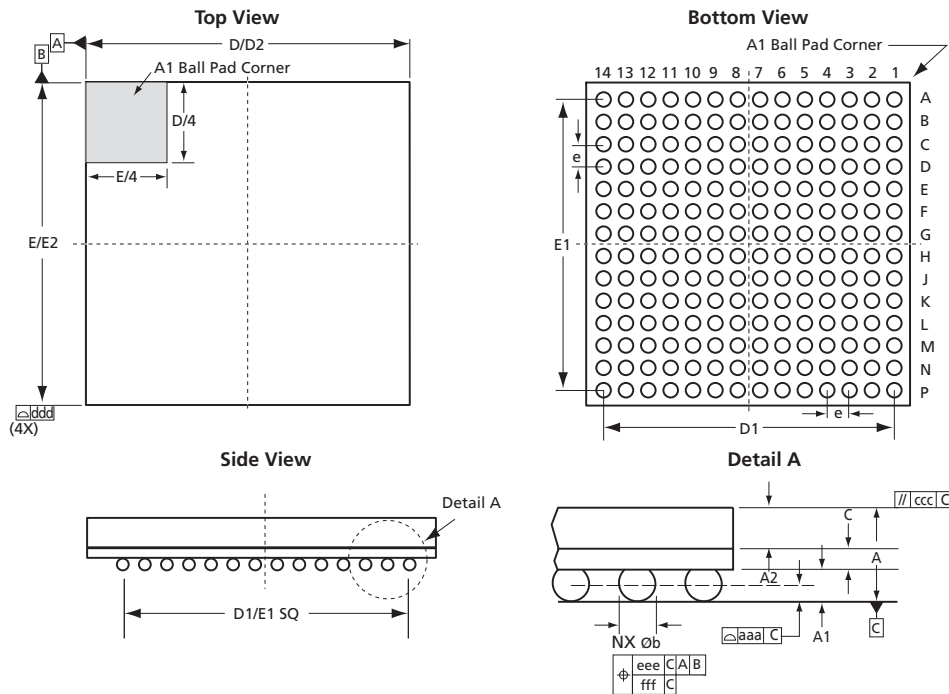
Table 75 • Supported Devices for CS180

Supported Devices	
eX256 ¹	AX125 ¹

1. This product is obsolete.

2.15.8 CS196

The following figure shows the package outline of CS196.

Figure 63 • Package Outline of CS195

Note: Dimensions are in millimeters. For more information on dimensions, see [Chip Scale Package Dimensions](#), page 93.

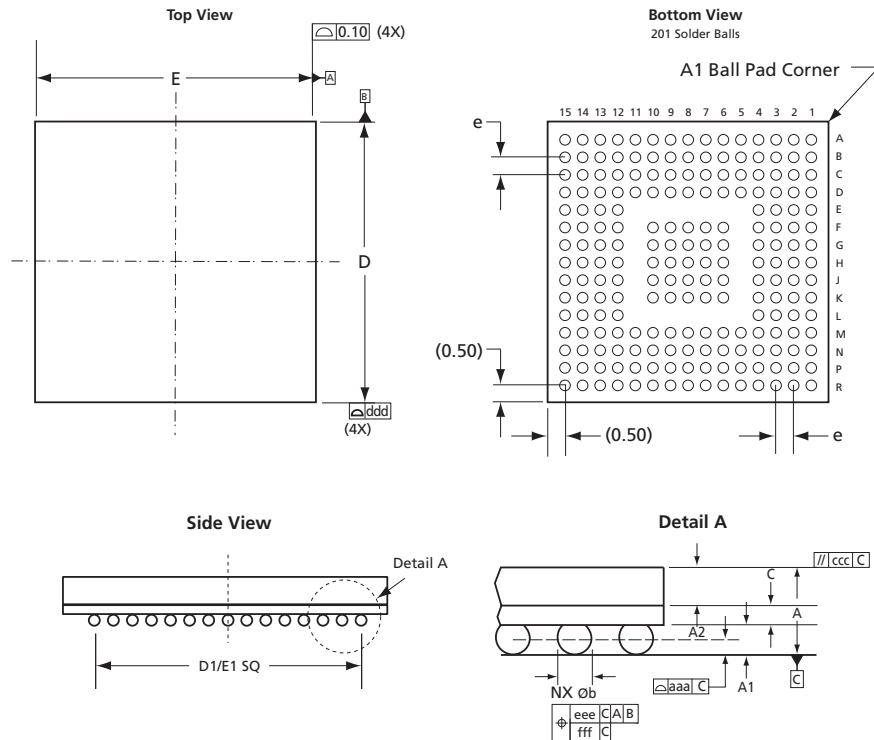
The following table shows the supported devices for CS196.

Table 76 • Supported Devices for CS196

Supported Devices
AGL125
AGL250
AGL400

2.15.9 CS201

The following figure shows the package outline of CS201.

Figure 64 • Package Outline of CS201

Note: Dimensions are in millimeters. For more information on dimensions, see [Chip Scale Package Dimensions](#), page 93.

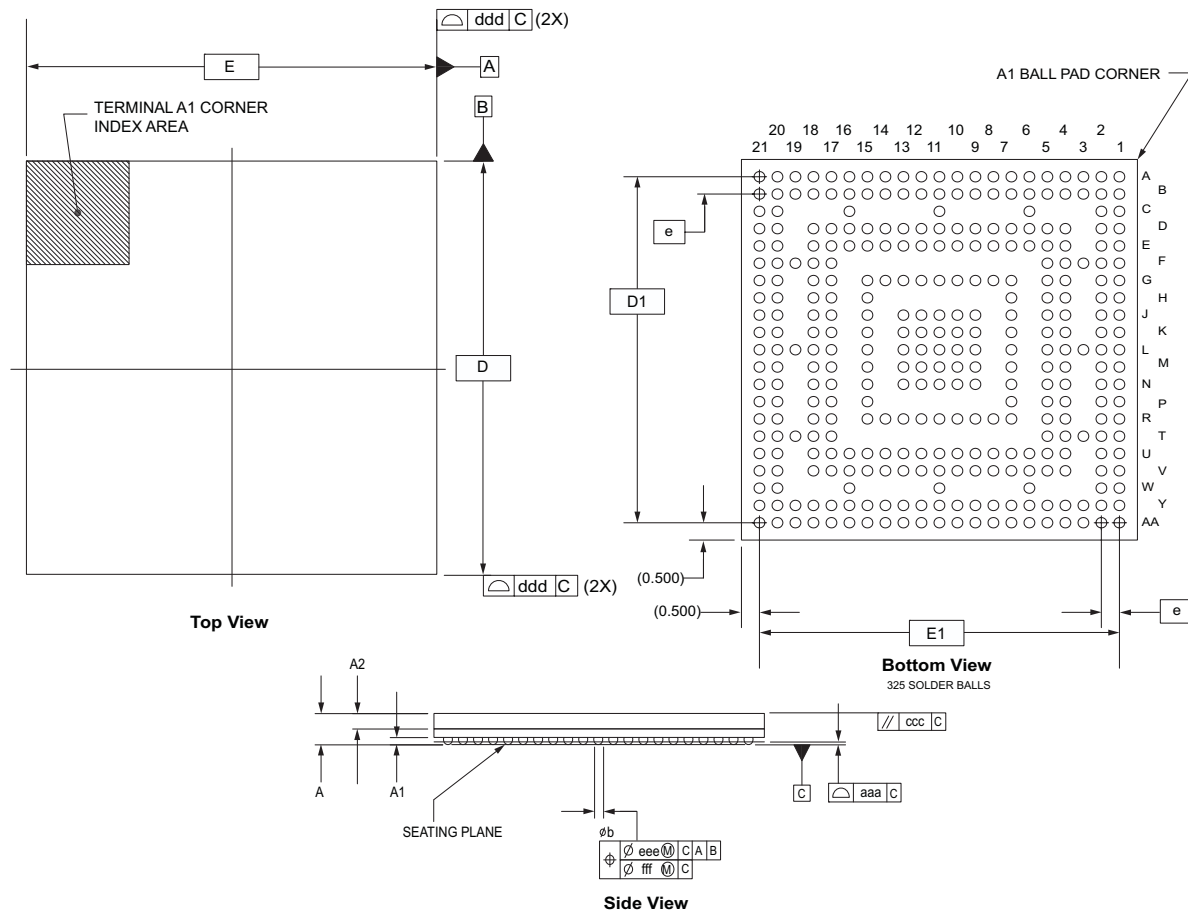
The following table shows the supported devices for CS201.

Table 77 • Supported Devices for CS201

Supported Devices
AGLP030
AGLP060

2.15.10 FCS325—(Option 1)

The following figure shows the package outline of FCS325 (Option 1).

Figure 65 • Package Outline of FCS325 (Option 1)

Note: Dimensions are in millimeters. For more information on dimensions, see [Chip Scale Package Dimensions](#), page 93.

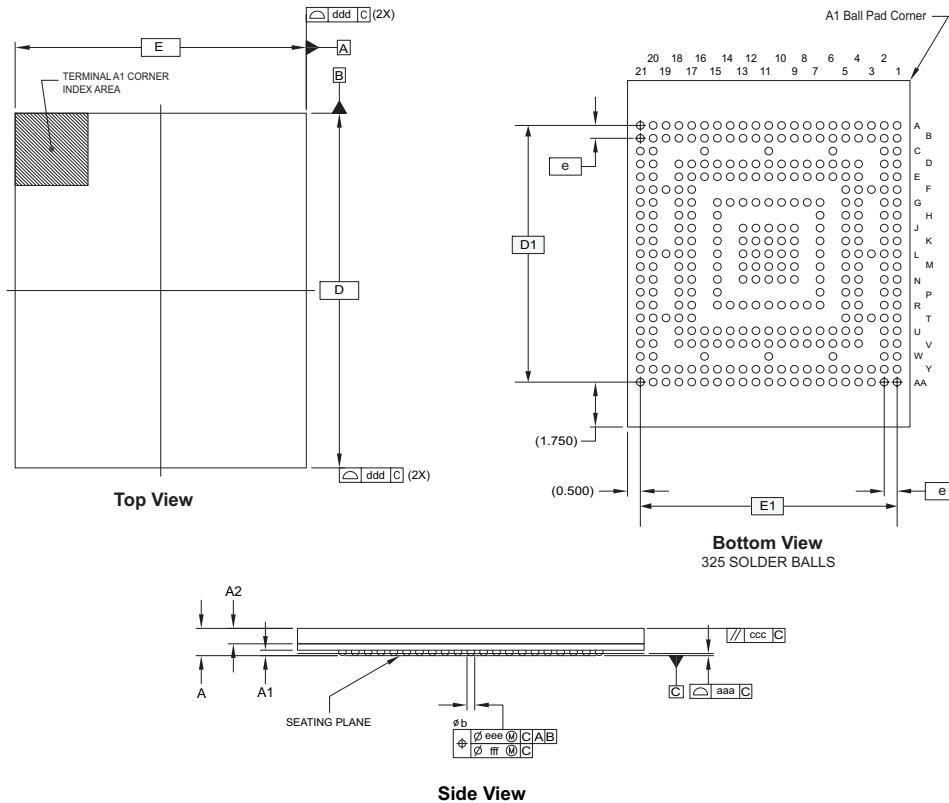
The following table shows the supported devices for FCS325–(Option 1).

Table 78 • Supported Devices for FCS325 (Option 1)

Supported Devices	
SmartFusion2 (M2S050, M2S025, M2S060)	IGLOO2 (M2GL050, M2GL025, M2GL060)

2.15.11 FCS325–(Option 2)

The following figure shows the package outline of FCS325–(Option 2).

Figure 66 • Package Outline of FCS325—(Option 2)

Note: Dimensions are in millimeters. For more information on dimensions, see [Chip Scale Package Dimensions](#), page 93.

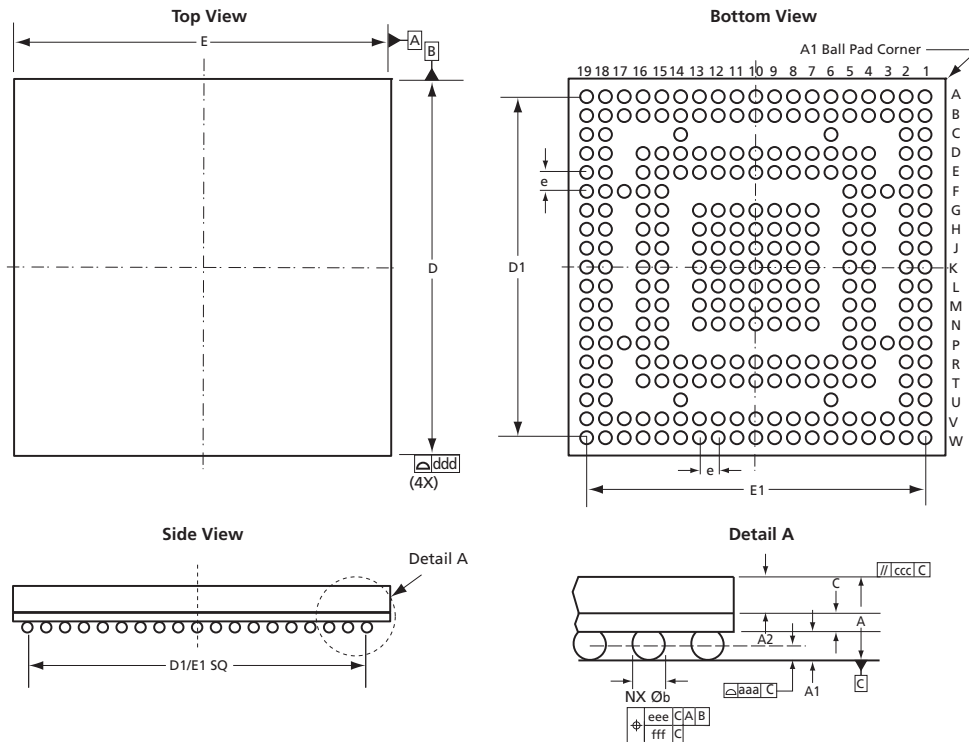
The following table shows the supported devices for FCS325—(Option 2).

Table 79 • Supported Devices for FCS325 (Option 2)

Supported Devices	
SmartFusion2 (M2S090)	IGLOO2 (M2GL090)

2.15.12 CS281

The following figure shows the package outline of CS281.

Figure 67 • Package Outline of CS281

Note: Dimensions are in millimeters. For more information on dimensions, see [Chip Scale Package Dimensions](#), page 93.

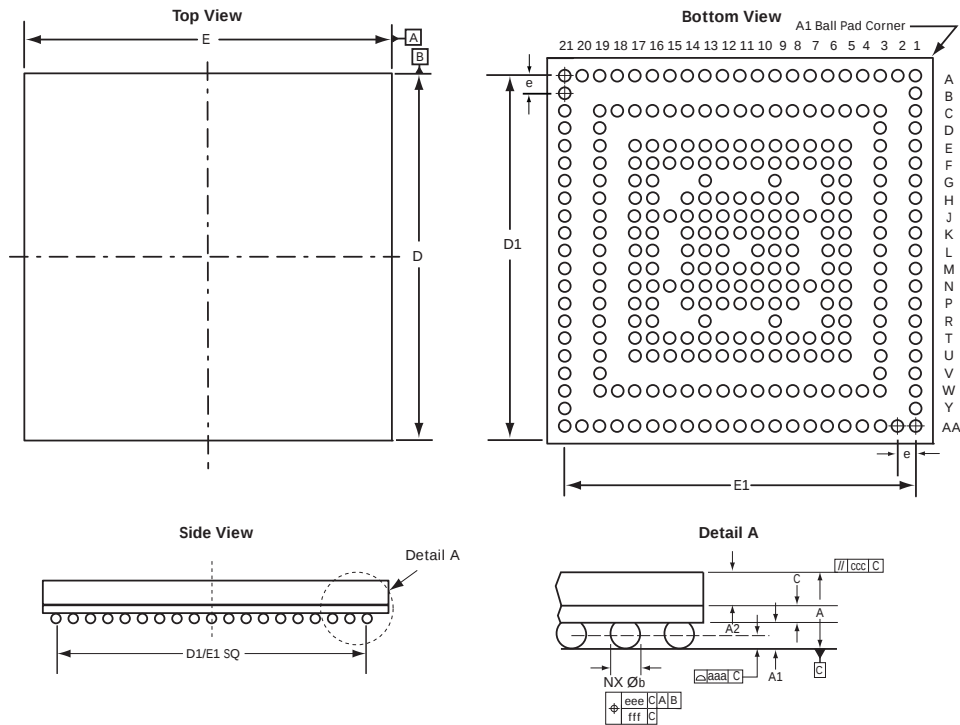
The following table shows the supported devices for CS281.

Table 80 • Supported Devices for CS281

Supported Devices
AGLP125
AGL600
AGL1000
M1AGL600
M1AGL1000

2.15.13 CS288

The following figure shows the package outline of CS288.

Figure 68 • Package Outline of CS288

Note: Dimensions are in millimeters. For more information on dimensions, see [Chip Scale Package Dimensions](#), page 93.

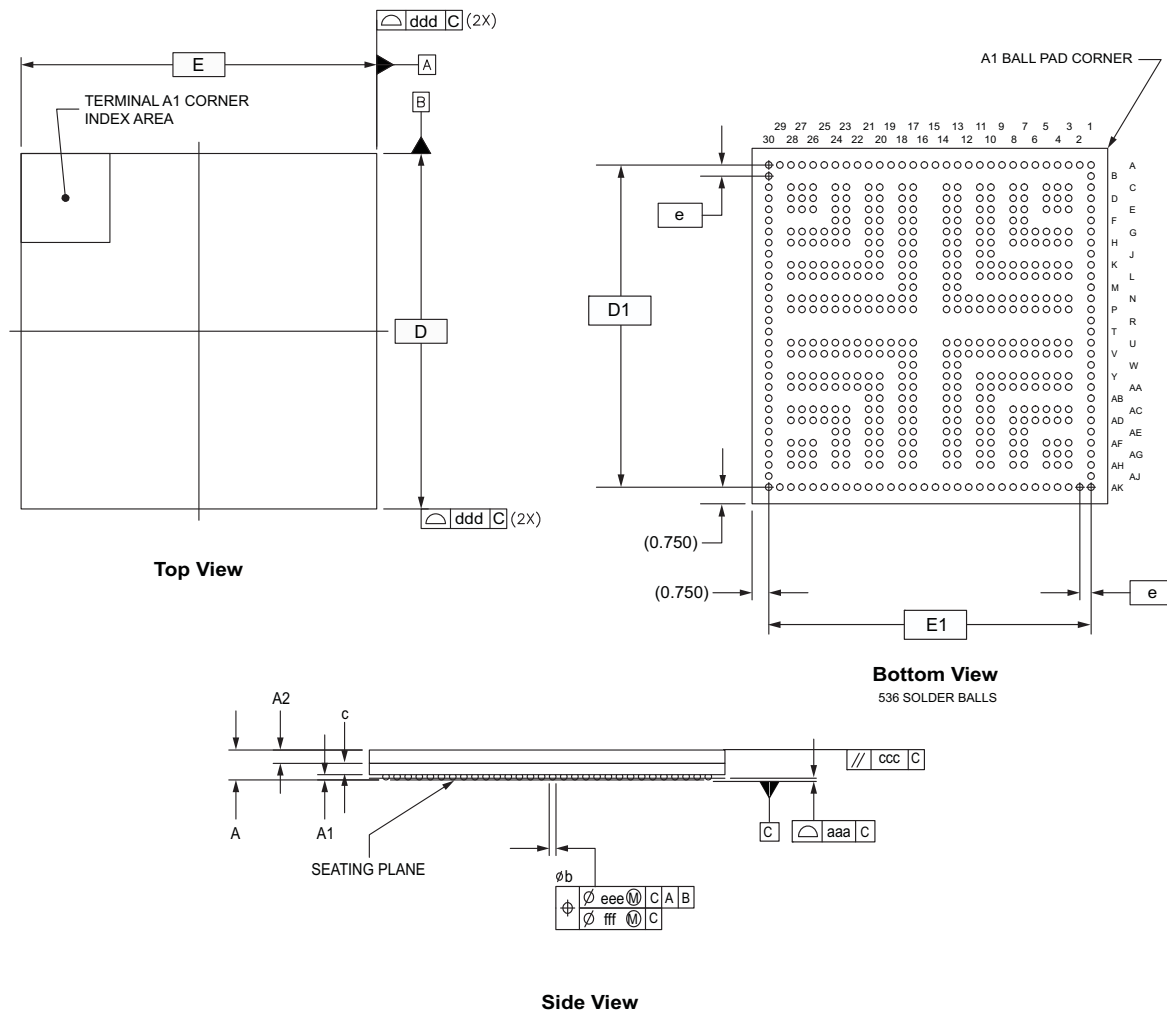
The following table shows the supported devices for CS288.

Table 81 • Supported Devices for CS288

Supported Devices
A2F060
A2F200
A2F500

2.15.14 FCS536

The following figure shows the package outline of FCS536.

Figure 69 • Package Outline of FCS536

Note: Dimensions are in millimeters. For more information on dimensions, see [Chip Scale Package Dimensions](#), page 93.

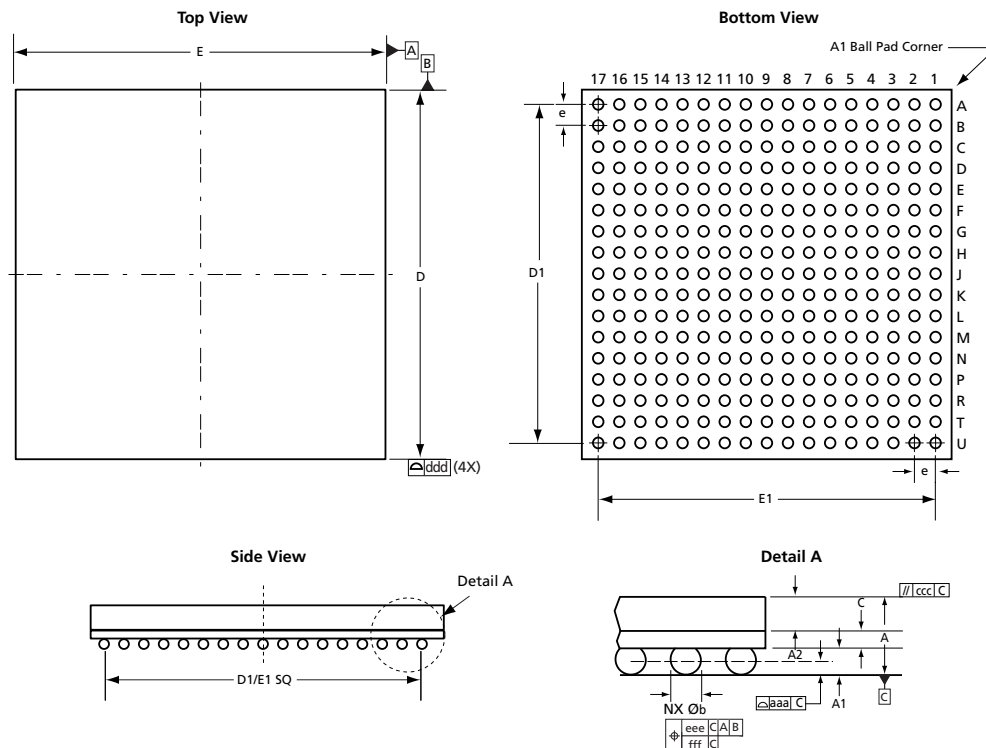
The following table shows the supported devices for FCS536.

Table 82 • Supported Devices for FCS536

Supported Devices
IGLOO2 (M2GL150)

2.15.15 CS289

The following figure shows the package outline of CS289.

Figure 70 • Package Outline of CS289

Note: Dimensions are in millimeters. For more information on dimensions, see [Chip Scale Package Dimensions](#), page 93.

The following table shows the supported devices for CS289.

Table 83 • Supported Devices for CS289

Supported Devices	
AGLP030	
AGLP060	
AGLP125	

2.15.16 Chip Scale Package Dimensions

The following table lists the chip scale package dimensions for UC36, CS49, UC81, and CS81.

Table 84 • Chip Scale Package Dimensions for UC36, CS49, UC81, and CS81

JEDEC Equivalent	UC36, page 79			CS49, page 79 MO-205			UC81, page 80			CS81, page 81		
Dimension	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.
A	0.66	0.73	0.80	—	—	1.50	0.66	0.73	0.80	0.66	0.73	0.80
A1	0.07	REF		0.25	—	—	0.07	REF		0.07	REF	
A2	0.40	0.45	0.50	0.85	—	—	0.42	0.45	0.48	0.42	0.45	0.48
aaa	0.08			0.12			0.08			0.08		
b	0.18	0.23	0.28	0.45	0.50	0.55	0.18	0.23	0.28	0.20	0.25	0.30
c	0.21	REF		—	0.36	—	0.21	REF		0.21	REF	
ccc	0.10			0.10			0.10			0.10		

Table 84 • Chip Scale Package Dimensions for UC36, CS49, UC81, and CS81

D/E	3.00 BSC	7.00 BSC	4.00 BSC	5.00 BSC
D1/E1	2.00	— 4.80 —	— 3.20 —	— 4.00 —
e	0.4 BSC	0.8 BSC	0.4 BSC	0.5 BSC
eee	0.15	0.15	0.15	0.15
fff	0.05	0.08	0.05	0.05

The following table lists the chip scale package dimensions for CS121, CS128, CS180, CS196, and CS201.

Table 85 • Chip Scale Package Dimensions for CS121, CS128, CS180, CS196, and CS201

JEDEC Equivalent	CS121, page 82 MO-195, Variation AC			CS128, page 83 MO-205, Variation BD			CS180, page 84 MO-205, Variation BF			CS196, page 85 MO-195, Variation BE			CS201, page 86 MO195, Variation AE ²		
Dimension	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.
A	0.79	0.89	0.99	—	—	1.50	—	—	1.50	—	—	1.20	0.79	0.89	0.99
A1	0.18	0.23	0.28	0.25	—	—	0.25	—	—	0.15	—	—	0.18	0.23	0.28
A2	0.40	0.45	0.50	0.85	—	—	0.85	—	—	0.60	—	—	0.40	0.45	0.50
aaa	0.08			0.12			0.12			0.08			0.08		
b	0.25	0.30	0.35	0.45	0.50	0.55	0.45	0.50	0.55	0.25	0.30	0.35	0.25	0.30	0.35
c	0.16	0.21	0.26	—	0.36	—	—	0.36	—	—	0.36	—	0.16	0.21	0.25
ccc	0.10			0.10			0.10			0.10			0.10		
D/E	6.00 BSC			11.00 BSC			13.00 BSC			8.00 BSC			8.00 BSC		
D1/E1	—	5.00	—	—	8.80	—	—	10.40	—	—	6.50	—	—	7.00	—
e	0.5 BSC			0.8 BSC			0.8 BSC			0.5 BSC			0.5 BSC		
eee	0.15			0.15			0.15			0.15			0.15		
fff	0.05			0.08			0.08			0.05			0.05		

Note: All dimensions are in millimeters.

Note: Variation AG depopulated.

The following table lists the chip scale package dimensions for FC325 and FC536.

Table 86 • Chip Scale Package Dimensions for FC325 and FC536

JEDEC Equivalent	CS325 (Option 1) (FCS325—(Option 1), page 87) FCS325—(Option 2), page 88						FCS536, page 91		
Dimension	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.
A			1.01			1.16			1.45
A1	0.15	0.21		0.15	0.21		0.15	0.24	
A2	0.40	0.45	0.50	0.55	0.60	0.65	0.55	0.60	0.65
aaa		0.08			0.08		0.08		
b	0.25	0.30	0.35	0.25	0.30	0.35	0.25	0.30	0.35
bbb		N.A.			N.A.		N.A.		

Table 86 • Chip Scale Package Dimensions for FC325 and FC536

c	0.21	0.25	0.29	0.21	0.25	0.29	0.472	0.512	0.552
ccc		0.10			0.10		0.10		
D		11.00			13.50		16.0		
D1		10.00 BSC			10.00 BSC		14.50 BSC		
E		11.00			11.00		16.0		
ddd		0.15			0.15		0.15		
E1		10.00 BSC			10.00 BSC		14.50 BSC		
e		0.50 TYP			0.50 TYP		0.50 TYP		
eee		0.15			0.15		0.15		

Note: All dimensions are in millimeters.

Note: Variation AG depopulated.

The following table lists the chip scale package dimensions for CS281, CS288, and CS289

Table 87 • Chip Scale Package Dimensions for FC325 and FC536

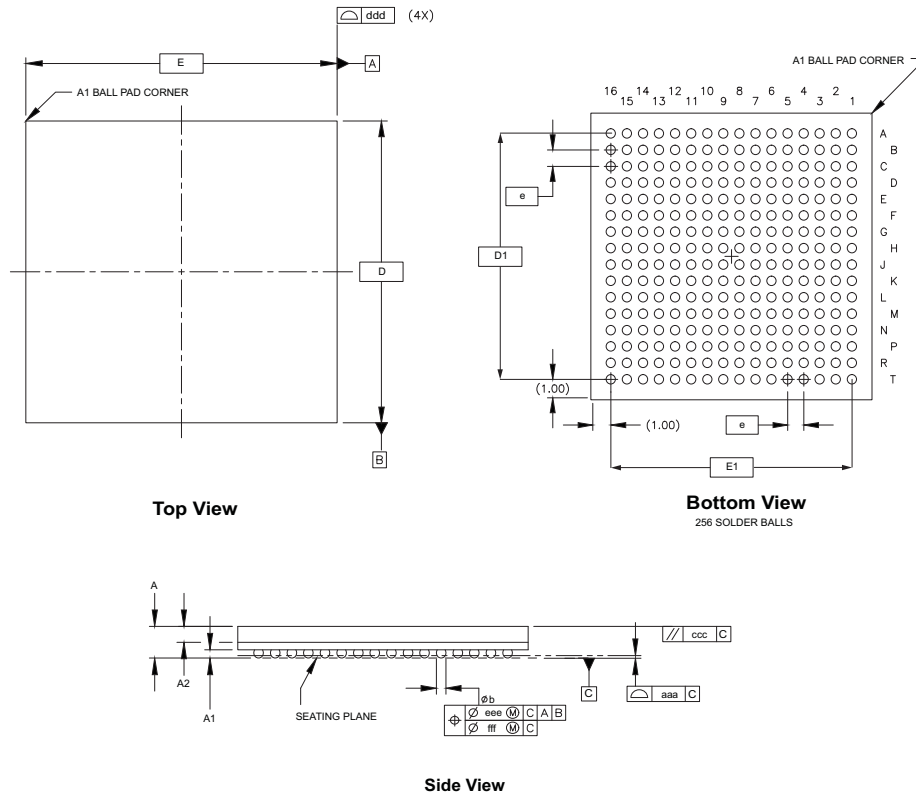
JEDEC Equivalent	CS281, page 89 MO-195, Variation AG2			CS288, page 90			CS289, page 92		
Dimension	Min.	Nom.	Max.	Min.	Nom.	Max.	Min.	Nom.	Max.
A	–	–	1.05	–	–	1.05	1.01	1.11	1.20
A1	0.18	0.23	0.28	0.18	0.23	0.28	0.25	0.30	0.35
A2	–	0.45 REF	–	–	0.45 REF	–	0.55	0.60	0.65
aaa	0.08			0.08			0.08		
b	0.26	0.31	0.36	0.26	0.31	0.36	0.35	0.40	0.45
c	–	0.26 REF	–	–	0.26 REF	–	0.17	0.21	0.25
ccc	0.20			0.20			0.10		
D/E	9.85	10.00	10.15	10.85	11.0	11.15	14.00 BSC		
D1/E1	9.00 BSC			10.00 BSC			–	12.80	–
e	0.5 BSC			0.5 BSC			0.8 BSC		
eee	0.15			0.15			0.15		
fff	0.05			0.05			0.08		

Note: All dimensions are in millimeters.

Note: Variation AG depopulated.

2.15.17 VF256

The following figure shows the package outline of VF256.

Figure 71 • Package Outline of VF256

Note: Dimensions are in millimeters. For more information on dimensions, see [Dimensions of VF256](#), page 98.

The following table shows the supported devices for VF256.

Table 88 • Supported Devices for VF256

Supported Devices	
SmartFusion2	IGLOO2
M2S025, M2S025T, M2S025TS	M2GL025, M2GL025T, M2S025TS
M2S010, M2S010T, M2S025TS	M2GL010, M2GL010T,
M2S005, M2S005S	M2GL025TS
	M2GL005, M2GL005S

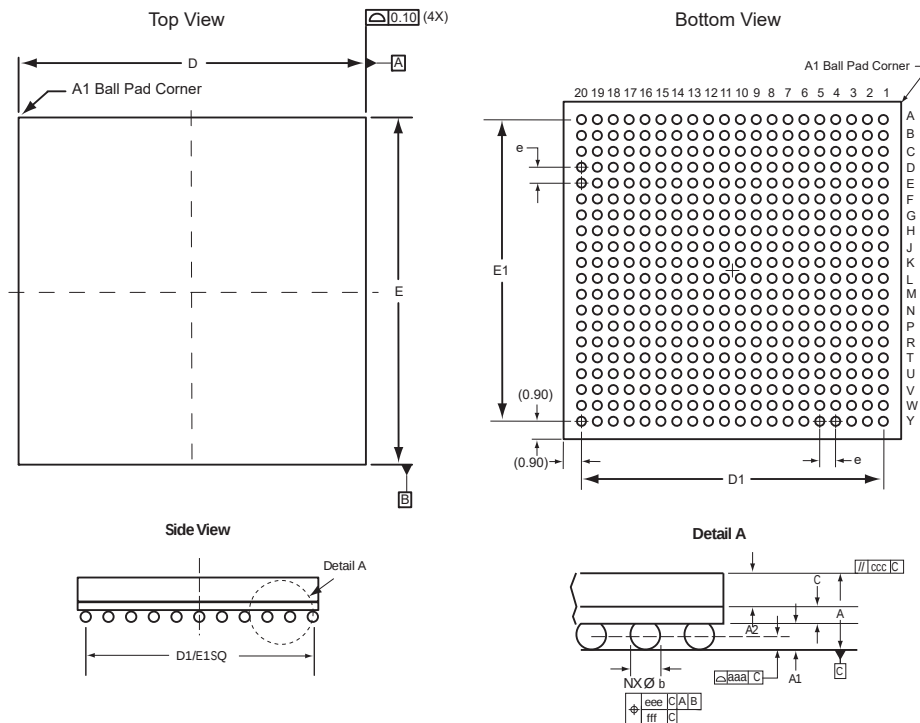
2.16 Very Fine Pitch Ball Grid Array

The following figures show package outlines for various packages under very fine pitch ball grid array.

2.16.1 VF400

The following figure shows the package outline of VF400.

Figure 72 • Package Outline of VF400



The following table lists the supported devices for VF400.

Table 89 • Supported Devices for VS400

Supported Devices	
M2S005, M2S005S	M2GL005, M2GL005S
M2S010, M2S010T, M2S010TS	M2GL010, M2GL010T,
M2S025, M2S025T, M2S025TS	M2GL010TS
M2S050, M2S050T, M2S050TS	M2GL025, M2GL025T,
M2S060, M2S060T, M2S060TS	M2GL025TS
	M2GL050, M2GL050T,
	M2GL050TS
	M2GL060, M2GL060T,
	M2GL060TS

2.16.2 Dimensions of VF400

The following table lists the dimensions of VF400.

Table 90 • Dimensions of VF400

JEDEC Equivalent	VF400, page 96		
Dimension	Min.	Nom.	Max.
A	1.31	1.41	1.51
A1	0.32	0.37	0.42
A2	0.65	0.70	0.75
aaa	0.12		
b	0.41	0.46	0.51

Table 90 • Dimensions of VF400

c	0.29	0.34	0.39
ccc	0.10		
D/E	17.00 BSC		
D1/E1	—	15.20	—
e	0.80 BSC		
eee	0.15		
fff	0.08		

Note: All dimensions are in millimeters.

2.16.3 Dimensions of VF256

The following table lists the dimensions of VF256.

Table 91 • Dimensions of VF256

JEDEC Equivalent	VF256, page 95		
Dimension	Min.	Nom.	Max.
A	1.36	1.46	1.56
A1	0.35	0.40	0.45
A2	0.65	0.70	0.75
aaa	0.12		
b	0.45	0.50	0.55
ccc	0.10		
D	14.00		
D1	12.00 BSC		
E	14.00		
E1	12.00 BSC		
ddd	0.10		
fff	0.08		
e	0.80 TYP		
eee	0.15		

Note: All dimensions are in millimeters.

Note: BSC = Basic spacing between centers.