


## Overview

The KEMET T494 Series is a lower ESR version of the popular T491 Series, designed specifically for today's highly automated surface mount processes and equipment. The T494 combines KEMET's proven solid tantalum technology, acclaimed and respected throughout the world, with the latest in materials, processes and automation, resulting in unsurpassed total performance and value. This product meets or exceeds the requirements of EIA standard 535BAAC. This series is classified as MSL (Moisture Sensitivity Level) 1 under J STD 020:

unlimited floor life time at ≤30°C / 85% RH. The T494 standard terminations are available in 100% matte tin and provide excellent wetting characteristics and compatibility with today's surface mount solder systems. Tin/lead (Sn/Pb) terminations are available upon request for any part number. Gold-plated terminations are also available for use with conductive epoxy attachment processes. Standard packaging of these devices is tape and reel in accordance with EIA 481. This system provides perfect compatibility with all tape-fed placement units.

## Benefits

- Meets or exceeds EIA Standard 535BAAC
- Taped and reeled per EIA 481
- Symmetrical, compliant terminations
- Optional gold-plated terminations
- Laser-marked case
- 100% surge current test on C, D, E, U, V, X sizes
- Halogen-free epoxy
- Capacitance values of 0.1 µF to 1,000 µF
- Tolerances of ±10% and ±20%
- Voltage rating of 2.5 – 50 VDC
- Extended range values
- Low profile case sizes
- RoHS Compliant and lead-free terminations
- Operating temperature range of -55°C to +125°C

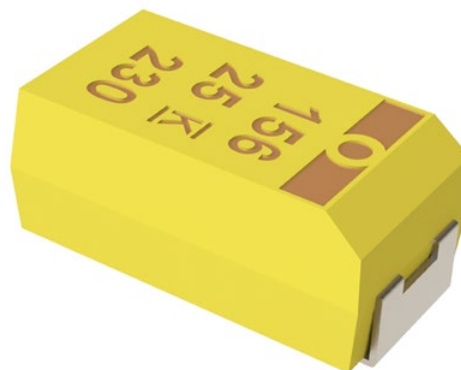

## Environmental Compliance

RoHS Compliant (6/6) according to Directive 2002/95/EC when ordered with 100% Sn Solder



RoHS Compliant

## SPICE

For a detailed analysis of specific part numbers, please visit [www.kemet.com](http://www.kemet.com) for a free download of KEMET's SPICE software. The KEMET SPICE program is freeware intended to aid design engineers in analyzing the performance of these capacitors over frequency, temperature, ripple, and DC bias conditions.

## Applications

Typical applications include decoupling and filtering in industrial and automotive end applications, such as DC/DC converters, portable electronics, telecommunications, and control units.

## Ordering Information

| T               | 494                  | T                            | 336                                                                                    | M                                | 004                                                                                                                                      | A                   | T                                                                                                                         |                                    |
|-----------------|----------------------|------------------------------|----------------------------------------------------------------------------------------|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|---------------------|---------------------------------------------------------------------------------------------------------------------------|------------------------------------|
| Capacitor Class | Series               | Case Size                    | Capacitance Code (pF)                                                                  | Capacitance Tolerance            | Voltage                                                                                                                                  | Failure Rate/Design | Lead Material                                                                                                             | Packaging (C-Spec)                 |
| T = Tantalum    | Industrial - Low ESR | A, B, C, D, E, S, T, U, V, X | First two digits represent significant figures. Third digit specifies number of zeros. | K = $\pm 10\%$<br>M = $\pm 20\%$ | 2R5 = 2.5 V<br>003 = 3 V<br>004 = 4 V<br>006 = 6.3 V<br>010 = 10 V<br>016 = 16 V<br>020 = 20 V<br>025 = 25 V<br>035 = 35 V<br>050 = 50 V | A = N/A             | T = 100% Matte Tin (Sn) Plated<br>H = Standard Solder Coated (SnPb 5% Pb minimum)<br>G = Gold Plated (A, B, C, D, X only) | Blank = 7" Reel<br>7280 = 13" Reel |

## Performance Characteristics

| Item                    | Performance Characteristics                                |
|-------------------------|------------------------------------------------------------|
| Operating Temperature   | -55°C to 125°C                                             |
| Rated Capacitance Range | 0.1 – 1,000 $\mu$ F @ 120 Hz/25°C                          |
| Capacitance Tolerance   | K Tolerance (10%), M Tolerance (20%)                       |
| Rated Voltage Range     | 2.5 – 50 V                                                 |
| DF (120 Hz)             | Refer to Part Number Electrical Specification Table        |
| ESR (100 kHz)           | Refer to Part Number Electrical Specification Table        |
| Leakage Current         | $\leq 0.01$ CV ( $\mu$ A) at rated voltage after 5 minutes |


## Qualification

| Test                       | Condition                                                                                                              |       | Characteristics |                              |          |          |
|----------------------------|------------------------------------------------------------------------------------------------------------------------|-------|-----------------|------------------------------|----------|----------|
| Endurance                  | 85°C @ rated voltage, 2,000 hours<br>125°C @ 2/3 rated voltage, 2,000 hours                                            |       | Δ C/C           | Within ±10% of initial value |          |          |
|                            |                                                                                                                        |       | DF              | Within initial limits        |          |          |
|                            |                                                                                                                        |       | DCL             | Within 1.25 x initial limit  |          |          |
|                            |                                                                                                                        |       | ESR             | Within initial limits        |          |          |
| Storage Life               | 125°C @ 0 volts, 2,000 hours                                                                                           |       | Δ C/C           | Within ±10% of initial value |          |          |
|                            |                                                                                                                        |       | DF              | Within initial limits        |          |          |
|                            |                                                                                                                        |       | DCL             | Within 1.25 x initial limit  |          |          |
|                            |                                                                                                                        |       | ESR             | Within initial limits        |          |          |
| Thermal Shock              | MIL–STD–202, Method 107, Condition B, mounted, -55°C to 125°C, 1,000 cycles                                            |       | Δ C/C           | Within ±5% of initial value  |          |          |
|                            |                                                                                                                        |       | DF              | Within initial limits        |          |          |
|                            |                                                                                                                        |       | DCL             | Within 1.25 x initial limit  |          |          |
|                            |                                                                                                                        |       | ESR             | Within initial limits        |          |          |
| Temperature Stability      | Extreme temperature exposure at a succession of continuous steps at +25°C, -55°C, +25°C, +85°C, +125°C, +25°C.         | Δ C/C | +25°C           | -55°C                        | +85°C    | +125°C   |
|                            |                                                                                                                        | DF    | IL*             | ±10%                         | ±10%     | ±20%     |
|                            |                                                                                                                        | DCL   | IL              | IL                           | 1.5 x IL | 1.5 x IL |
|                            |                                                                                                                        | DCL   | IL              | n/a                          | 10 x IL  | 12 x IL  |
| Surge Voltage              | 25°C and 85°C, 1.32 x rated voltage 1,000 cycles (125°C, 1.2 x rated voltage).                                         |       | Δ C/C           | Within ±5% of initial value  |          |          |
|                            |                                                                                                                        |       | DF              | Within initial limits        |          |          |
|                            |                                                                                                                        |       | DCL             | Within initial limits        |          |          |
|                            |                                                                                                                        |       | ESR             | Within initial limits        |          |          |
| Mechanical Shock/Vibration | MIL–STD–202, Method 213, Condition I, 100 G peak<br>MIL–STD–202, Method 204, Condition D, 10 Hz to 2,000 Hz, 20 G peak |       | Δ C/C           | Within ±10% of initial value |          |          |
|                            |                                                                                                                        |       | DF              | Within initial limits        |          |          |
|                            |                                                                                                                        |       | DCL             | Within initial limits        |          |          |


\*IL = Initial limit

## Electrical Characteristics

ESR vs. Frequency

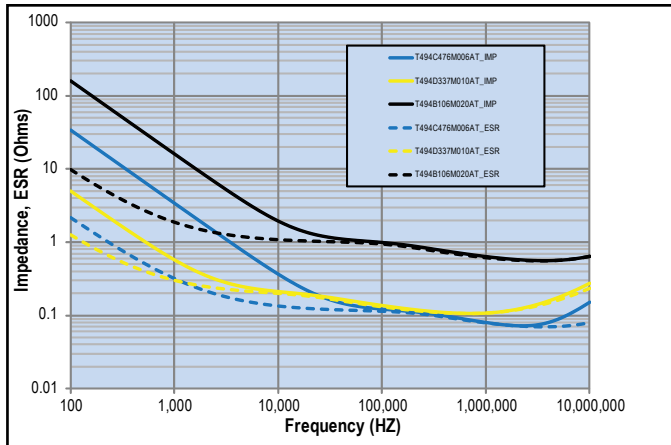


Capacitance vs. Frequency

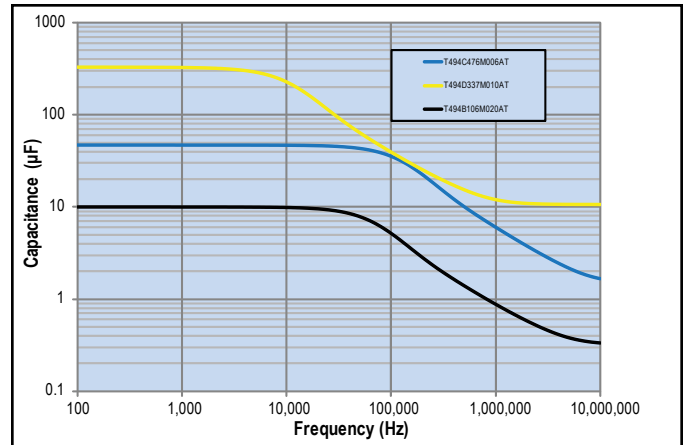

## Dimensions – Millimeters (Inches)

Metric will govern


CATHODE (-) END VIEW




SIDE VIEW



ANODE (+) END VIEW



BOTTOM VIEW

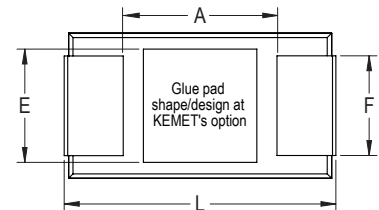

| Case Size |         | Component                  |                            |                            |                    |                    |                         |                              |            |            |             |            |            |            |
|-----------|---------|----------------------------|----------------------------|----------------------------|--------------------|--------------------|-------------------------|------------------------------|------------|------------|-------------|------------|------------|------------|
| KEMET     | EIA     | L*                         | W*                         | H*                         | F* ±0.1<br>±(.004) | S* ±0.3<br>±(.012) | B* ±0.15<br>(Ref) ±.006 | X (Ref)                      | P (Ref)    | R (Ref)    | T (Ref)     | A (Min)    | G (Ref)    | E (Ref)    |
| A         | 3216-18 | 3.2 ±0.2<br>(0.126 ±0.008) | 1.6 ±0.2<br>(0.063 ±0.008) | 1.6 ±0.2<br>(0.063 ±0.008) | 1.2 (.047)         | 0.8 (.031)         | 0.4 (.016)              | 0.10 ±0.10<br>(0.004 ±0.004) | 0.4 (.016) | 0.4 (.016) | 0.13 (.005) | 0.8 (.31)  | 1.1 (.043) | 1.3 (.051) |
| B         | 3528-21 | 3.5 ±0.2<br>(0.138 ±0.008) | 2.8 ±0.2<br>(0.110 ±0.008) | 1.9 ±0.2<br>(0.075 ±0.008) | 2.2 (.087)         | 0.8 (.031)         | 0.4 (.016)              | 0.10 ±0.10<br>(0.004 ±0.004) | 0.5 (.020) | 1.0 (.039) | 0.13 (.005) | 1.1 (.043) | 1.8 (.071) | 2.2 (.087) |
| C         | 6032-28 | 6.0 ±0.3<br>(0.236 ±0.03)  | 3.2 ±0.3<br>(0.126 ±0.012) | 2.5 ±0.3<br>(0.098 ±0.012) | 2.2 (.087)         | 1.3 (.051)         | 0.5 (.020)              | 0.10 ±0.10<br>(0.004 ±0.004) | 0.9 (.035) | 1.0 (.039) | 0.13 (.005) | 2.5 (.098) | 2.8 (.110) | 2.4 (.094) |
| D         | 7343-31 | 7.3 ±0.3<br>(0.287 ±0.012) | 4.3 ±0.3<br>(0.169 ±0.012) | 2.8 ±0.3<br>(0.110 ±0.012) | 2.4 (.094)         | 1.3 (.051)         | 0.5 (.020)              | 0.10 ±0.10<br>(0.004 ±0.004) | 0.9 (.035) | 1.0 (.039) | 0.13 (.005) | 3.8 (.150) | 3.5 (.138) | 3.5 (.138) |
| X         | 7343-43 | 7.3 ±0.3<br>(0.287 ±0.012) | 4.3 ±0.3<br>(0.169 ±0.012) | 4.0 ±0.3<br>(0.157 ±0.012) | 2.4 (.094)         | 1.3 (.051)         | 0.5 (.020)              | 0.10 ±0.10<br>(0.004 ±0.004) | 1.7 (.067) | 1.0 (.039) | 0.13 (.005) | 3.8 (.150) | 3.5 (.138) | 3.5 (.138) |
| E         | 7360-38 | 7.3 ±0.3<br>(0.287 ±0.012) | 6.0 ±0.3<br>(0.236 ±0.012) | 3.6 ±0.2<br>(0.142 ±0.008) | 4.1 (.161)         | 1.3 (.051)         | 0.5 (.020)              | 0.10 ±0.10<br>(0.004 ±0.004) | n/a        | n/a        | 0.13 (.005) | 3.8 (.150) | 3.5 (.138) | 3.5 (.138) |
| S         | 3216-12 | 3.2 ±0.2<br>(0.126 ±0.008) | 1.6 ±0.2<br>(0.063 ±0.008) | 1.2 (.047)                 | 1.2 (.047)         | 0.8 (.031)         | n/a                     | 0.05 (.002)                  | n/a        | n/a        | 0.13 (.005) | 0.8 (.031) | 1.1 (.043) | 1.3 (.051) |
| T         | 3528-12 | 3.5 ±0.2<br>(0.138 ±0.008) | 2.8 ±0.2<br>(0.110 ±0.008) | 1.2 (.047)                 | 2.2 (.087)         | 0.8 (.031)         | n/a                     | 0.05 (.002)                  | n/a        | n/a        | 0.13 (.005) | 1.1 (.043) | 1.8 (.071) | 2.2 (.087) |
| U         | 6032-15 | 6.0 ±0.3<br>(0.236 ±0.012) | 3.2 ±0.2<br>(0.110 ±0.008) | 1.5 (.059)                 | 2.2 (.087)         | 1.3 (.051)         | n/a                     | 0.05 (.002)                  | n/a        | n/a        | 0.13 (.005) | 2.5 (.098) | 2.8 (.110) | 2.4 (.094) |
| V         | 7343-20 | 7.3 ±0.3<br>(0.287 ±0.012) | 4.3 ±0.3<br>(0.169 ±0.012) | 2.0 (.079)                 | 2.4 (.094)         | 1.3 (.051)         | n/a                     | 0.05 (.002)                  | n/a        | n/a        | 0.13 (.005) | 3.8 (.150) | 3.5 (.138) | 3.5 (.138) |

Notes: (Ref) – Dimensions provided for reference only. No dimensions provided for B, P or R because low profile cases do not have a bevel or a notch.

\* MIL-PRF-55365/8 specified dimensions

Table 1 – Ratings &amp; Part Number Reference

| Rated Voltage | Rated Cap | Case Code/<br>Case Size | KEMET Part Number            | DC Leakage             | DF                     | ESR                     | Maximum Allowable Ripple Current |                      |                       | Moisture Sensitivity   |
|---------------|-----------|-------------------------|------------------------------|------------------------|------------------------|-------------------------|----------------------------------|----------------------|-----------------------|------------------------|
| VDC           | µF        | KEMET/EIA               | (See below for part options) | µA @ 20°C<br>Max/5 Min | % @ 20°C<br>120 Hz Max | Ω @ 20°C<br>100 kHz Max | (mA) 100 kHz<br>25°C             | (mA) 100 kHz<br>85°C | (mA) 100 kHz<br>125°C | Reflow Temp<br>≤ 260°C |
| 2.5           | 100       | T/3528-12               | T494T107(1)2R5A(2)           | 2.5                    | 24.0                   | 3.5                     | 141                              | 127                  | 56                    | 1                      |
| 2.5           | 220       | D/7343-31               | T494D227(1)2R5A(2)           | 5.5                    | 8.0                    | 0.2                     | 866                              | 779                  | 346                   | 1                      |
| 3             | 33        | A/3216-18               | T494A336(1)004A(2)           | 1.0                    | 6.0                    | 2.0                     | 194                              | 175                  | 78                    | 1                      |
| 4             | 3.3       | A/3216-18               | T494A335(1)004A(2)           | 0.5                    | 6.0                    | 4.0                     | 137                              | 123                  | 55                    | 1                      |
| 4             | 4.7       | A/3216-18               | T494A475(1)004A(2)           | 0.5                    | 6.0                    | 3.5                     | 146                              | 131                  | 58                    | 1                      |
| 4             | 6.8       | A/3216-18               | T494A685(1)004A(2)           | 0.5                    | 6.0                    | 3.0                     | 158                              | 142                  | 63                    | 1                      |
| 4             | 6.8       | S/3216-12               | T494S685(1)004A(2)           | 0.5                    | 6.0                    | 7.0                     | 93                               | 84                   | 37                    | 1                      |
| 4             | 10        | B/3528-21               | T494B106(1)004A(2)           | 0.5                    | 6.0                    | 1.2                     | 266                              | 239                  | 106                   | 1                      |
| 4             | 10        | A/3216-18               | T494A106(1)004A(2)           | 0.5                    | 6.0                    | 2.0                     | 194                              | 175                  | 78                    | 1                      |
| 4             | 10        | S/3216-12               | T494S106(1)004A(2)           | 0.5                    | 6.0                    | 9.0                     | 82                               | 74                   | 33                    | 1                      |
| 4             | 15        | B/3528-21               | T494B156(1)004A(2)           | 0.6                    | 6.0                    | 1.2                     | 266                              | 239                  | 106                   | 1                      |
| 4             | 15        | A/3216-18               | T494A156(1)004A(2)           | 0.6                    | 6.0                    | 1.5                     | 224                              | 202                  | 90                    | 1                      |
| 4             | 15        | T/3528-12               | T494T156(1)004A(2)           | 0.6                    | 6.0                    | 2.0                     | 187                              | 168                  | 75                    | 1                      |
| 4             | 15        | S/3216-12               | T494S156(M)004A(2)           | 0.6                    | 10.0                   | 9.0                     | 82                               | 74                   | 33                    | 1                      |
| 4             | 22        | C/6032-28               | T494C226(1)004A(2)           | 0.9                    | 6.0                    | 0.5                     | 469                              | 422                  | 188                   | 1                      |
| 4             | 22        | B/3528-21               | T494B226(1)004A(2)           | 0.9                    | 6.0                    | 0.6                     | 376                              | 338                  | 150                   | 1                      |
| 4             | 22        | A/3216-18               | T494A226(1)004A(2)           | 0.9                    | 6.0                    | 1.5                     | 224                              | 202                  | 90                    | 1                      |
| 4             | 22        | S/3216-12               | T494S226(M)004A(2)           | 0.9                    | 10.0                   | 8.0                     | 87                               | 78                   | 35                    | 1                      |
| 4             | 22        | T/3528-12               | T494T226(1)004A(2)           | 0.9                    | 6.0                    | 2.5                     | 167                              | 150                  | 67                    | 1                      |
| 4             | 33        | C/6032-28               | T494C336(1)004A(2)           | 1.3                    | 6.0                    | 0.5                     | 469                              | 422                  | 188                   | 1                      |
| 4             | 33        | U/6032-15               | T494U336(1)004A(2)           | 1.3                    | 6.0                    | 0.6                     | 387                              | 348                  | 155                   | 1                      |
| 4             | 33        | B/3528-21               | T494B336(1)004A(2)           | 1.3                    | 6.0                    | 0.5                     | 412                              | 371                  | 165                   | 1                      |
| 4             | 33        | A/3216-18               | T494A336(1)004A(2)           | 1.3                    | 6.0                    | 3.0                     | 158                              | 142                  | 63                    | 1                      |
| 4             | 33        | T/3528-12               | T494T336(M)004A(2)           | 1.3                    | 8.0                    | 3.5                     | 141                              | 127                  | 56                    | 1                      |
| 4             | 47        | C/6032-28               | T494C476(1)004A(2)           | 1.9                    | 6.0                    | 0.5                     | 469                              | 422                  | 188                   | 1                      |
| 4             | 47        | U/6032-15               | T494U476(1)004A(2)           | 1.9                    | 6.0                    | 0.6                     | 387                              | 348                  | 155                   | 1                      |
| 4             | 47        | B/3528-21               | T494B476(1)004A(2)           | 1.9                    | 6.0                    | 0.5                     | 412                              | 371                  | 165                   | 1                      |
| 4             | 47        | A/3216-18               | T494A476(M)004A(2)           | 1.9                    | 12.0                   | 2.0                     | 194                              | 175                  | 78                    | 1                      |
| 4             | 47        | T/3528-12               | T494T476(M)004A(2)           | 1.9                    | 12.0                   | 4.0                     | 132                              | 119                  | 53                    | 1                      |
| 4             | 68        | D/7343-31               | T494D686(1)004A(2)           | 2.7                    | 6.0                    | 0.20                    | 866                              | 779                  | 346                   | 1                      |
| 4             | 68        | C/6032-28               | T494C686(1)004A(2)           | 2.7                    | 6.0                    | 0.25                    | 663                              | 597                  | 265                   | 1                      |
| 4             | 68        | U/6032-15               | T494U686(1)004A(2)           | 2.7                    | 6.0                    | 0.60                    | 387                              | 348                  | 155                   | 1                      |
| 4             | 68        | B/3528-21               | T494B686(1)004A(2)           | 2.7                    | 6.0                    | 2.00                    | 206                              | 185                  | 82                    | 1                      |
| 4             | 68        | A/3216-18               | T494A686(1)004A(2)           | 2.7                    | 30.0                   | 3.00                    | 158                              | 142                  | 63                    | 1                      |
| 4             | 100       | D/7343-31               | T494D107(1)004A(2)           | 4.0                    | 8.0                    | 0.20                    | 866                              | 779                  | 346                   | 1                      |
| 4             | 100       | C/6032-28               | T494C107(1)004A(2)           | 4.0                    | 8.0                    | 0.20                    | 742                              | 668                  | 297                   | 1                      |
| 4             | 100       | U/6032-15               | T494U107(1)004A(2)           | 4.0                    | 10.0                   | 1.00                    | 300                              | 270                  | 120                   | 1                      |
| 4             | 100       | B/3528-21               | T494B107(M)004A(2)           | 4.0                    | 8.0                    | 0.65                    | 362                              | 326                  | 145                   | 1                      |
| 4             | 100       | A/3216-18               | T494A107(M)004A(2)           | 4.0                    | 30.0                   | 3.00                    | 158                              | 142                  | 63                    | 1                      |
| 4             | 100       | T/3528-12               | T494T107(M)004A(2)           | 4.0                    | 30.0                   | 4.50                    | 125                              | 113                  | 50                    | 1                      |
| 4             | 150       | D/7343-31               | T494D157(1)004A(2)           | 6.0                    | 8.0                    | 0.15                    | 1000                             | 900                  | 400                   | 1                      |
| 4             | 150       | V/7343-20               | T494V157(1)004A(2)           | 6.0                    | 8.0                    | 0.20                    | 791                              | 712                  | 316                   | 1                      |
| 4             | 150       | C/6032-28               | T494C157(1)004A(2)           | 6.0                    | 8.0                    | 0.30                    | 606                              | 545                  | 242                   | 1                      |
| 4             | 150       | B/3528-21               | T494B157(M)004A(2)           | 6.0                    | 12.0                   | 1.00                    | 292                              | 263                  | 117                   | 1                      |
| 4             | 220       | V/7343-20               | T494V227(1)004A(2)           | 8.8                    | 8.0                    | 0.30                    | 645                              | 581                  | 258                   | 1                      |
| 4             | 220       | B/3528-21               | T494B227(M)004A(2)           | 8.8                    | 8.0                    | 0.40                    | 461                              | 415                  | 184                   | 1                      |
| 4             | 330       | D/7343-31               | T494D337(1)004A(2)           | 13.2                   | 8.0                    | 0.15                    | 1000                             | 900                  | 400                   | 1                      |
| 4             | 330       | C/6032-28               | T494C337(1)004A(2)           | 13.2                   | 10.0                   | 0.09                    | 1106                             | 995                  | 442                   | 1                      |
| 4             | 330       | V/7343-20               | T494V337(1)004A(2)           | 13.2                   | 12.0                   | 0.30                    | 645                              | 581                  | 258                   | 1                      |
| 4             | 470       | X/7343-43               | T494X477(1)004A(2)           | 18.8                   | 8.0                    | 0.15                    | 1049                             | 944                  | 420                   | 1                      |
| 4             | 470       | D/7343-31               | T494D477(1)004A(2)           | 18.8                   | 8.0                    | 0.15                    | 1000                             | 900                  | 400                   | 1                      |
| VDC           | µF        | KEMET/EIA               | (See below for part options) | µA @ 20°C<br>Max/5 Min | % @ 20°C<br>120 Hz Max | Ω @ 20°C<br>100 kHz Max | (mA) 100 kHz<br>25°C             | (mA) 100 kHz<br>85°C | (mA) 100 kHz<br>125°C | Reflow Temp<br>≤ 260°C |
| Rated Voltage | Rated Cap | Case Code/<br>Case Size | KEMET Part Number            | DC Leakage             | DF                     | ESR                     | Maximum Allowable Ripple Current |                      |                       | Moisture Sensitivity   |

(1) To complete KEMET part number, insert M for ±20% or K for ±10%. Designates capacitance tolerance.

(2) To complete KEMET part number, insert T = 100% Matte Tin (Sn) Plated, G = Gold Plated, H = Standard Solder coated (SnPb 5% Pb minimum). Designates termination finish.

Refer to Ordering Information for additional detail.

Higher voltage ratings and tighter tolerance product including ESR may be substituted within the same size at KEMET's option. Voltage substitution will be marked with the higher voltage rating. Substitutions can include better than series.

**Table 1 – Ratings & Part Number Reference cont'd**

| Rated Voltage | Rated Cap | Case Code/<br>Case Size | KEMET Part Number            | DC Leakage             | DF                     | ESR                     | Maximum Allowable Ripple Current |                      |                       | Moisture Sensitivity   |
|---------------|-----------|-------------------------|------------------------------|------------------------|------------------------|-------------------------|----------------------------------|----------------------|-----------------------|------------------------|
| VDC           | µF        | KEMET/EIA               | (See below for part options) | µA @ 20°C<br>Max/5 Min | % @ 20°C<br>120 Hz Max | Ω @ 20°C<br>100 kHz Max | (mA) 100 kHz<br>25°C             | (mA) 100 kHz<br>85°C | (mA) 100 kHz<br>125°C | Reflow Temp<br>≤ 260°C |
| 4             | 680       | X/7343-43               | T494X687(M)004A(2)           | 27.2                   | 12.0                   | 0.10                    | 1285                             | 1157                 | 514                   | 1                      |
| 4             | 680       | D/7343-31               | T494D687(M)004A(2)           | 27.2                   | 12.0                   | 0.15                    | 1000                             | 900                  | 400                   | 1                      |
| 4             | 1000      | X/7343-43               | T494X108(1)004A(2)           | 40.0                   | 12.0                   | 0.10                    | 1285                             | 1157                 | 514                   | 1                      |
| 4             | 1000      | E/7360-38               | T494E108(M)004A(2)           | 40.0                   | 15.0                   | 0.08                    | 1581                             | 1423                 | 632                   | 1                      |
| 6.3           | 2.2       | A/3216-18               | T494A225(1)006A(2)           | 0.5                    | 6.0                    | 6.0                     | 112                              | 101                  | 45                    | 1                      |
| 6.3           | 3.3       | A/3216-18               | T494A335(1)006A(2)           | 0.5                    | 6.0                    | 6.0                     | 112                              | 101                  | 45                    | 1                      |
| 6.3           | 4.7       | A/3216-18               | T494A475(1)006A(2)           | 0.5                    | 6.0                    | 3.5                     | 146                              | 131                  | 58                    | 1                      |
| 6.3           | 4.7       | S/3216-12               | T494S475(1)006A(2)           | 0.5                    | 6.0                    | 8.0                     | 87                               | 78                   | 35                    | 1                      |
| 6.3           | 6.8       | B/3528-21               | T494B685(1)006A(2)           | 0.5                    | 6.0                    | 1.2                     | 266                              | 239                  | 106                   | 1                      |
| 6.3           | 6.8       | A/3216-18               | T494A685(1)006A(2)           | 0.5                    | 6.0                    | 2.0                     | 194                              | 175                  | 78                    | 1                      |
| 6.3           | 6.8       | S/3216-12               | T494S685(1)006A(2)           | 0.5                    | 6.0                    | 9.0                     | 82                               | 74                   | 33                    | 1                      |
| 6.3           | 10        | B/3528-21               | T494B106(1)006A(2)           | 0.6                    | 6.0                    | 1.0                     | 292                              | 263                  | 117                   | 1                      |
| 6.3           | 10        | A/3216-18               | T494A106(1)006A(2)           | 0.6                    | 6.0                    | 2.0                     | 194                              | 175                  | 78                    | 1                      |
| 6.3           | 10        | T/3528-12               | T494T106(1)006A(2)           | 0.6                    | 6.0                    | 1.2                     | 242                              | 218                  | 97                    | 1                      |
| 6.3           | 10        | S/3216-12               | T494S106(M)006A(2)           | 0.6                    | 10.0                   | 9.0                     | 82                               | 74                   | 33                    | 1                      |
| 6.3           | 15        | C/6032-28               | T494C156(1)006A(2)           | 0.9                    | 6.0                    | 0.6                     | 428                              | 385                  | 171                   | 1                      |
| 6.3           | 15        | B/3528-21               | T494B156(1)006A(2)           | 0.9                    | 6.0                    | 0.7                     | 348                              | 313                  | 139                   | 1                      |
| 6.3           | 15        | A/3216-18               | T494A156(1)006A(2)           | 0.9                    | 6.0                    | 2.0                     | 194                              | 175                  | 78                    | 1                      |
| 6.3           | 15        | T/3528-12               | T494T156(1)006A(2)           | 0.9                    | 6.0                    | 2.5                     | 167                              | 150                  | 67                    | 1                      |
| 6.3           | 15        | S/3216-12               | T494S156(M)006A(2)           | 0.9                    | 10.0                   | 10.0                    | 77                               | 69                   | 31                    | 1                      |
| 6.3           | 22        | C/6032-28               | T494C226(1)006A(2)           | 1.4                    | 6.0                    | 0.5                     | 469                              | 422                  | 188                   | 1                      |
| 6.3           | 22        | U/6032-15               | T494U226(1)006A(2)           | 1.4                    | 6.0                    | 0.8                     | 335                              | 302                  | 134                   | 1                      |
| 6.3           | 22        | B/3528-21               | T494B226(1)006A(2)           | 1.4                    | 6.0                    | 0.6                     | 376                              | 338                  | 150                   | 1                      |
| 6.3           | 22        | A/3216-18               | T494A226(1)006A(2)           | 1.4                    | 6.0                    | 3.0                     | 158                              | 142                  | 63                    | 1                      |
| 6.3           | 22        | T/3528-12               | T494T226(M)006A(2)           | 1.4                    | 8.0                    | 3.5                     | 141                              | 127                  | 56                    | 1                      |
| 6.3           | 33        | C/6032-28               | T494C336(1)006A(2)           | 2.1                    | 6.0                    | 0.3                     | 606                              | 545                  | 242                   | 1                      |
| 6.3           | 33        | U/6032-15               | T494U336(1)006A(2)           | 2.1                    | 6.0                    | 0.6                     | 387                              | 348                  | 155                   | 1                      |
| 6.3           | 33        | B/3528-21               | T494B336(1)006A(2)           | 2.1                    | 6.0                    | 0.6                     | 376                              | 338                  | 150                   | 1                      |
| 6.3           | 33        | A/3216-18               | T494A336(1)006A(2)           | 2.1                    | 12.0                   | 2.0                     | 194                              | 175                  | 78                    | 1                      |
| 6.3           | 33        | T/3528-12               | T494T336(M)006A(2)           | 2.1                    | 12.0                   | 4.0                     | 132                              | 119                  | 53                    | 1                      |
| 6.3           | 47        | D/7343-31               | T494D476(1)006A(2)           | 3.0                    | 6.0                    | 0.22                    | 826                              | 743                  | 330                   | 1                      |
| 6.3           | 47        | C/6032-28               | T494C476(1)006A(2)           | 3.0                    | 6.0                    | 0.25                    | 663                              | 597                  | 265                   | 1                      |
| 6.3           | 47        | U/6032-15               | T494U476(1)006A(2)           | 3.0                    | 6.0                    | 0.60                    | 387                              | 348                  | 155                   | 1                      |
| 6.3           | 47        | B/3528-21               | T494B476(1)006A(2)           | 3.0                    | 6.0                    | 0.50                    | 412                              | 371                  | 165                   | 1                      |
| 6.3           | 47        | A/3216-18               | T494A476(M)006A(2)           | 3.0                    | 12.0                   | 2.50                    | 173                              | 156                  | 69                    | 1                      |
| 6.3           | 47        | T/3528-12               | T494T476(1)006A(2)           | 3.0                    | 24.0                   | 4.00                    | 132                              | 119                  | 53                    | 1                      |
| 6.3           | 68        | D/7343-31               | T494D686(1)006A(2)           | 4.3                    | 6.0                    | 0.20                    | 866                              | 779                  | 346                   | 1                      |
| 6.3           | 68        | C/6032-28               | T494C686(1)006A(2)           | 4.3                    | 6.0                    | 0.20                    | 742                              | 668                  | 297                   | 1                      |
| 6.3           | 68        | U/6032-15               | T494U686(1)006A(2)           | 4.3                    | 10.0                   | 1.00                    | 300                              | 270                  | 120                   | 1                      |
| 6.3           | 68        | B/3528-21               | T494B686(M)006A(2)           | 4.3                    | 8.0                    | 0.65                    | 362                              | 326                  | 145                   | 1                      |
| 6.3           | 68        | A/3216-18               | T494A686(1)006A(2)           | 4.3                    | 30.0                   | 3.00                    | 158                              | 142                  | 63                    | 1                      |
| 6.3           | 100       | D/7343-31               | T494D107(1)006A(2)           | 6.3                    | 8.0                    | 0.15                    | 1000                             | 900                  | 400                   | 1                      |
| 6.3           | 100       | V/7343-20               | T494V107(1)006A(2)           | 6.3                    | 8.0                    | 0.20                    | 791                              | 712                  | 316                   | 1                      |
| 6.3           | 100       | C/6032-28               | T494C107(1)006A(2)           | 6.3                    | 8.0                    | 0.30                    | 606                              | 545                  | 242                   | 1                      |
| 6.3           | 100       | U/6032-15               | T494U107(M)006A(2)           | 6.3                    | 10.0                   | 1.20                    | 274                              | 247                  | 110                   | 1                      |
| 6.3           | 100       | B/3528-21               | T494B107(1)006A(2)           | 6.3                    | 15.0                   | 1.50                    | 238                              | 214                  | 95                    | 1                      |
| 6.3           | 150       | B/3528-21               | T494B157M006A(2)             | 9.5                    | 15.0                   | 2.25                    | 194                              | 175                  | 78                    | 1                      |
| 6.3           | 150       | D/7343-31               | T494D157(1)006A(2)           | 9.5                    | 8.0                    | 0.15                    | 1000                             | 900                  | 400                   | 1                      |
| 6.3           | 150       | C/6032-28               | T494C157(M)006A(2)           | 9.5                    | 8.0                    | 0.30                    | 606                              | 545                  | 242                   | 1                      |
| 6.3           | 150       | V/7343-20               | T494V157(1)006A(2)           | 9.5                    | 8.0                    | 0.30                    | 645                              | 581                  | 258                   | 1                      |
| 6.3           | 220       | X/7343-43               | T494X227(1)006A(2)           | 13.9                   | 8.0                    | 0.15                    | 1049                             | 944                  | 420                   | 1                      |
| VDC           | µF        | KEMET/EIA               | (See below for part options) | µA @ 20°C<br>Max/5 Min | % @ 20°C<br>120 Hz Max | Ω @ 20°C<br>100 kHz Max | (mA) 100 kHz<br>25°C             | (mA) 100 kHz<br>85°C | (mA) 100 kHz<br>125°C | Reflow Temp<br>≤ 260°C |
| Rated Voltage | Rated Cap | Case Code/<br>Case Size | KEMET Part Number            | DC Leakage             | DF                     | ESR                     | Maximum Allowable Ripple Current |                      |                       | Moisture Sensitivity   |

(1) To complete KEMET part number, insert M for ±20% or K for ±10%. Designates capacitance tolerance.

(2) To complete KEMET part number, insert T = 100% Matte Tin (Sn) Plated, G = Gold Plated, H = Standard Solder coated (SnPb 5% Pb minimum). Designates termination finish.

Refer to Ordering Information for additional detail.

Higher voltage ratings and tighter tolerance product including ESR may be substituted within the same size at KEMET's option. Voltage substitution will be marked with the higher voltage rating. Substitutions can include better than series.

**Table 1 – Ratings & Part Number Reference cont'd**

| Rated Voltage | Rated Cap | Case Code/<br>Case Size | KEMET Part Number            | DC Leakage             | DF                     | ESR                     | Maximum Allowable Ripple Current |                      |                       | Moisture Sensitivity   |
|---------------|-----------|-------------------------|------------------------------|------------------------|------------------------|-------------------------|----------------------------------|----------------------|-----------------------|------------------------|
| VDC           | µF        | KEMET/EIA               | (See below for part options) | µA @ 20°C<br>Max/5 Min | % @ 20°C<br>120 Hz Max | Ω @ 20°C<br>100 kHz Max | (mA) 100 kHz<br>25°C             | (mA) 100 kHz<br>85°C | (mA) 100 kHz<br>125°C | Reflow Temp<br>≤ 260°C |
| 6.3           | 220       | D/7343-31               | T494D227(1)006A(2)           | 13.9                   | 8.0                    | 0.15                    | 1000                             | 900                  | 400                   | 1                      |
| 6.3           | 220       | C/6032-28               | T494C227(M)006A(2)           | 13.9                   | 10.0                   | 0.30                    | 606                              | 545                  | 242                   | 1                      |
| 6.3           | 220       | V/7343-20               | T494V227(M)006A(2)           | 13.9                   | 12.0                   | 0.30                    | 645                              | 581                  | 258                   | 1                      |
| 6.3           | 330       | X/7343-43               | T494X337(1)006A(2)           | 20.8                   | 8.0                    | 0.15                    | 1049                             | 944                  | 420                   | 1                      |
| 6.3           | 330       | D/7343-31               | T494D337(1)006A(2)           | 20.8                   | 8.0                    | 0.15                    | 1000                             | 900                  | 400                   | 1                      |
| 6.3           | 330       | E/7360-38               | T494E337(1)006A(2)           | 20.8                   | 8.0                    | 0.25                    | 894                              | 805                  | 358                   | 1                      |
| 6.3           | 470       | X/7343-43               | T494X477(1)006A(2)           | 29.6                   | 10.0                   | 0.10                    | 1285                             | 1157                 | 514                   | 1                      |
| 6.3           | 470       | D/7343-31               | T494D477(M)006A(2)           | 29.6                   | 12.0                   | 0.15                    | 1000                             | 900                  | 400                   | 1                      |
| 6.3           | 470       | E/7360-38               | T494E477(1)006A(2)           | 29.6                   | 10.0                   | 0.20                    | 1000                             | 900                  | 400                   | 1                      |
| 6.3           | 680       | E/7360-38               | T494E687(M)006A(2)           | 42.8                   | 12.0                   | 0.10                    | 1414                             | 1273                 | 566                   | 1                      |
| 6.3           | 680       | X/7343-43               | T494X687(1)006A(2)           | 42.8                   | 12.0                   | 0.10                    | 1285                             | 1157                 | 514                   | 1                      |
| 10            | 1.5       | A/3216-18               | T494A155(1)010A(2)           | 0.5                    | 6.0                    | 6.0                     | 112                              | 101                  | 45                    | 1                      |
| 10            | 2.2       | B/3528-21               | T494B225(1)010A(2)           | 0.5                    | 6.0                    | 1.5                     | 238                              | 214                  | 95                    | 1                      |
| 10            | 2.2       | A/3216-18               | T494A225(1)010A(2)           | 0.5                    | 6.0                    | 6.0                     | 112                              | 101                  | 45                    | 1                      |
| 10            | 3.3       | A/3216-18               | T494A335(1)010A(2)           | 0.5                    | 6.0                    | 4.0                     | 137                              | 123                  | 55                    | 1                      |
| 10            | 3.3       | S/3216-12               | T494S335(1)010A(2)           | 0.5                    | 6.0                    | 9.0                     | 82                               | 74                   | 33                    | 1                      |
| 10            | 4.7       | B/3528-21               | T494B475(1)010A(2)           | 0.5                    | 6.0                    | 1.5                     | 238                              | 214                  | 95                    | 1                      |
| 10            | 4.7       | A/3216-18               | T494A475(1)010A(2)           | 0.5                    | 6.0                    | 3.0                     | 158                              | 142                  | 63                    | 1                      |
| 10            | 4.7       | S/3216-12               | T494S475(1)010A(2)           | 0.5                    | 6.0                    | 9.0                     | 82                               | 74                   | 33                    | 1                      |
| 10            | 6.8       | B/3528-21               | T494B685(1)010A(2)           | 0.7                    | 6.0                    | 1.2                     | 266                              | 239                  | 106                   | 1                      |
| 10            | 6.8       | A/3216-18               | T494A685(1)010A(2)           | 0.7                    | 6.0                    | 3.0                     | 158                              | 142                  | 63                    | 1                      |
| 10            | 6.8       | T/3528-12               | T494T685(1)010A(2)           | 0.7                    | 6.0                    | 2.0                     | 187                              | 168                  | 75                    | 1                      |
| 10            | 6.8       | S/3216-12               | T494S685(M)010A(2)           | 0.7                    | 10.0                   | 9.0                     | 82                               | 74                   | 33                    | 1                      |
| 10            | 10        | C/6032-28               | T494C106(1)010A(2)           | 1.0                    | 6.0                    | 0.6                     | 428                              | 385                  | 171                   | 1                      |
| 10            | 10        | B/3528-21               | T494B106(1)010A(2)           | 1.0                    | 6.0                    | 0.8                     | 326                              | 293                  | 130                   | 1                      |
| 10            | 10        | A/3216-18               | T494A106(1)010A(2)           | 1.0                    | 6.0                    | 1.8                     | 204                              | 184                  | 82                    | 1                      |
| 10            | 10        | T/3528-12               | T494T106(1)010A(2)           | 1.0                    | 6.0                    | 3.5                     | 141                              | 127                  | 56                    | 1                      |
| 10            | 10        | S/3216-12               | T494S106(M)010A(2)           | 1.0                    | 10.0                   | 12.0                    | 71                               | 64                   | 28                    | 1                      |
| 10            | 15        | C/6032-28               | T494C156(1)010A(2)           | 1.5                    | 6.0                    | 0.5                     | 469                              | 422                  | 188                   | 1                      |
| 10            | 15        | U/6032-15               | T494U156(1)010A(2)           | 1.5                    | 6.0                    | 0.8                     | 335                              | 302                  | 134                   | 1                      |
| 10            | 15        | B/3528-21               | T494B156(1)010A(2)           | 1.5                    | 6.0                    | 0.7                     | 348                              | 313                  | 139                   | 1                      |
| 10            | 15        | A/3216-18               | T494A156(1)010A(2)           | 1.5                    | 6.0                    | 3.2                     | 153                              | 138                  | 61                    | 1                      |
| 10            | 15        | T/3528-12               | T494T156(M)010A(2)           | 1.5                    | 8.0                    | 3.5                     | 141                              | 127                  | 56                    | 1                      |
| 10            | 22        | C/6032-28               | T494C226(1)010A(2)           | 2.2                    | 6.0                    | 0.4                     | 524                              | 472                  | 210                   | 1                      |
| 10            | 22        | U/6032-15               | T494U226(1)010A(2)           | 2.2                    | 6.0                    | 0.8                     | 335                              | 302                  | 134                   | 1                      |
| 10            | 22        | B/3528-21               | T494B226(1)010A(2)           | 2.2                    | 6.0                    | 0.7                     | 348                              | 313                  | 139                   | 1                      |
| 10            | 22        | A/3216-18               | T494A226(M)010A(2)           | 2.2                    | 10.0                   | 4.5                     | 129                              | 116                  | 52                    | 1                      |
| 10            | 22        | T/3528-12               | T494T226(M)010A(2)           | 2.2                    | 12.0                   | 6.0                     | 108                              | 97                   | 43                    | 1                      |
| 10            | 33        | D/7343-31               | T494D336(1)010A(2)           | 3.3                    | 6.0                    | 0.25                    | 775                              | 698                  | 310                   | 1                      |
| 10            | 33        | V/7343-20               | T494V336(1)010A(2)           | 3.3                    | 6.0                    | 0.30                    | 645                              | 581                  | 258                   | 1                      |
| 10            | 33        | C/6032-28               | T494C336(1)010A(2)           | 3.3                    | 6.0                    | 0.30                    | 606                              | 545                  | 242                   | 1                      |
| 10            | 33        | U/6032-15               | T494U336(1)010A(2)           | 3.3                    | 6.0                    | 0.60                    | 387                              | 348                  | 155                   | 1                      |
| 10            | 33        | T/3528-12               | T494T336(1)010A(2)           | 3.3                    | 24.0                   | 3.75                    | 137                              | 123                  | 55                    | 1                      |
| 10            | 33        | B/3528-21               | T494B336(1)010A(2)           | 3.3                    | 6.0                    | 1.40                    | 246                              | 221                  | 98                    | 1                      |
| 10            | 33        | A/3216-18               | T494A336(1)010A(2)           | 3.3                    | 15.0                   | 4.00                    | 137                              | 123                  | 55                    | 1                      |
| 10            | 47        | D/7343-31               | T494D476(1)010A(2)           | 4.7                    | 6.0                    | 0.22                    | 826                              | 743                  | 330                   | 1                      |
| 10            | 47        | V/7343-20               | T494V476(1)010A(2)           | 4.7                    | 6.0                    | 0.30                    | 645                              | 581                  | 258                   | 1                      |
| 10            | 47        | C/6032-28               | T494C476(1)010A(2)           | 4.7                    | 6.0                    | 0.30                    | 606                              | 545                  | 242                   | 1                      |
| 10            | 47        | U/6032-15               | T494U476(1)010A(2)           | 4.7                    | 10.0                   | 1.20                    | 274                              | 247                  | 110                   | 1                      |
| 10            | 47        | B/3528-21               | T494B476(M)010A(2)           | 4.7                    | 8.0                    | 0.65                    | 362                              | 326                  | 145                   | 1                      |
| 10            | 68        | D/7343-31               | T494D686(1)010A(2)           | 6.8                    | 6.0                    | 0.20                    | 866                              | 779                  | 346                   | 1                      |
| VDC           | µF        | KEMET/EIA               | (See below for part options) | µA @ 20°C<br>Max/5 Min | % @ 20°C<br>120 Hz Max | Ω @ 20°C<br>100 kHz Max | (mA) 100 kHz<br>25°C             | (mA) 100 kHz<br>85°C | (mA) 100 kHz<br>125°C | Reflow Temp<br>≤ 260°C |
| Rated Voltage | Rated Cap | Case Code/<br>Case Size | KEMET Part Number            | DC Leakage             | DF                     | ESR                     | Maximum Allowable Ripple Current |                      |                       | Moisture Sensitivity   |

(1) To complete KEMET part number, insert M for ±20% or K for ±10%. Designates capacitance tolerance.

(2) To complete KEMET part number, insert T = 100% Matte Tin (Sn) Plated, G = Gold Plated, H = Standard Solder coated (SnPb 5% Pb minimum). Designates termination finish.

Refer to Ordering Information for additional detail.

Higher voltage ratings and tighter tolerance product including ESR may be substituted within the same size at KEMET's option. Voltage substitution will be marked with the higher voltage rating. Substitutions can include better than series.



**Table 1 – Ratings & Part Number Reference cont'd**

| Rated Voltage | Rated Cap | Case Code/<br>Case Size | KEMET Part Number            | DC Leakage             | DF                     | ESR                     | Maximum Allowable Ripple Current |                      |                       | Moisture Sensitivity   |
|---------------|-----------|-------------------------|------------------------------|------------------------|------------------------|-------------------------|----------------------------------|----------------------|-----------------------|------------------------|
| VDC           | µF        | KEMET/EIA               | (See below for part options) | µA @ 20°C<br>Max/5 Min | % @ 20°C<br>120 Hz Max | Ω @ 20°C<br>100 kHz Max | (mA) 100 kHz<br>25°C             | (mA) 100 kHz<br>85°C | (mA) 100 kHz<br>125°C | Reflow Temp<br>≤ 260°C |
| 10            | 68        | C/6032-28               | T494C686(1)010A(2)           | 6.8                    | 6.0                    | 0.30                    | 606                              | 545                  | 242                   | 1                      |
| 10            | 68        | V/7343-20               | T494V686(1)010A(2)           | 6.8                    | 6.0                    | 0.30                    | 645                              | 581                  | 258                   | 1                      |
| 10            | 68        | U/6032-15               | T494U686(M)010A(2)           | 6.8                    | 10.0                   | 1.20                    | 274                              | 247                  | 110                   | 1                      |
| 10            | 68        | B/3528-21               | T494B686(M)010A(2)           | 6.8                    | 10.0                   | 1.50                    | 238                              | 214                  | 95                    | 1                      |
| 10            | 100       | D/7343-31               | T494D107(1)010A(2)           | 10.0                   | 8.0                    | 0.15                    | 1000                             | 900                  | 400                   | 1                      |
| 10            | 100       | C/6032-28               | T494C107(1)010A(2)           | 10.0                   | 8.0                    | 0.20                    | 742                              | 668                  | 297                   | 1                      |
| 10            | 100       | V/7343-20               | T494V107(1)010A(2)           | 10.0                   | 8.0                    | 0.40                    | 559                              | 503                  | 224                   | 1                      |
| 10            | 150       | X/7343-43               | T494X157(1)010A(2)           | 15.0                   | 8.0                    | 0.15                    | 1049                             | 944                  | 420                   | 1                      |
| 10            | 150       | D/7343-31               | T494D157(1)010A(2)           | 15.0                   | 8.0                    | 0.15                    | 1000                             | 900                  | 400                   | 1                      |
| 10            | 150       | C/6032-28               | T494C157(1)010A(2)           | 15.0                   | 10.0                   | 0.70                    | 396                              | 356                  | 158                   | 1                      |
| 10            | 150       | V/7343-20               | T494V157(M)010A(2)           | 15.0                   | 8.0                    | 0.30                    | 645                              | 581                  | 258                   | 1                      |
| 10            | 220       | X/7343-43               | T494X227(1)010A(2)           | 22.0                   | 8.0                    | 0.15                    | 1049                             | 944                  | 420                   | 1                      |
| 10            | 220       | D/7343-31               | T494D227(1)010A(2)           | 22.0                   | 8.0                    | 0.15                    | 1000                             | 900                  | 400                   | 1                      |
| 10            | 330       | X/7343-43               | T494X337(1)010A(2)           | 33.0                   | 10.0                   | 0.10                    | 1285                             | 1157                 | 514                   | 1                      |
| 10            | 330       | D/7343-31               | T494D337(1)010A(2)           | 33.0                   | 10.0                   | 0.15                    | 1000                             | 900                  | 400                   | 1                      |
| 10            | 330       | E/7360-38               | T494E337(1)010A(2)           | 33.0                   | 10.0                   | 0.25                    | 894                              | 805                  | 358                   | 1                      |
| 10            | 470       | X/7343-43               | T494X477(1)010A(2)           | 47.0                   | 10.0                   | 0.10                    | 1285                             | 1157                 | 514                   | 1                      |
| 10            | 470       | E/7360-38               | T494E477(M)010A(2)           | 47.0                   | 12.0                   | 0.10                    | 1414                             | 1273                 | 566                   | 1                      |
| 16            | 1         | A/3216-18               | T494A105(1)016A(2)           | 0.5                    | 4.0                    | 6.0                     | 112                              | 101                  | 45                    | 1                      |
| 16            | 1.5       | A/3216-18               | T494A155(1)016A(2)           | 0.5                    | 6.0                    | 6.0                     | 112                              | 101                  | 45                    | 1                      |
| 16            | 2.2       | A/3216-18               | T494A225(1)016A(2)           | 0.5                    | 6.0                    | 4.0                     | 137                              | 123                  | 55                    | 1                      |
| 16            | 2.2       | S/3216-12               | T494S225(1)016A(2)           | 0.5                    | 6.0                    | 10.0                    | 77                               | 69                   | 31                    | 1                      |
| 16            | 3.3       | B/3528-21               | T494B335(1)016A(2)           | 0.5                    | 6.0                    | 2.0                     | 206                              | 185                  | 82                    | 1                      |
| 16            | 3.3       | A/3216-18               | T494A335(1)016A(2)           | 0.5                    | 6.0                    | 4.0                     | 137                              | 123                  | 55                    | 1                      |
| 16            | 4.7       | B/3528-21               | T494B475(1)016A(2)           | 0.8                    | 6.0                    | 1.5                     | 238                              | 214                  | 95                    | 1                      |
| 16            | 4.7       | A/3216-18               | T494A475(1)016A(2)           | 0.8                    | 6.0                    | 3.0                     | 158                              | 142                  | 63                    | 1                      |
| 16            | 4.7       | T/3528-12               | T494T475(1)016A(2)           | 0.8                    | 6.0                    | 3.0                     | 153                              | 138                  | 61                    | 1                      |
| 16            | 6.8       | C/6032-28               | T494C685(1)016A(2)           | 1.1                    | 6.0                    | 0.8                     | 371                              | 334                  | 148                   | 1                      |
| 16            | 6.8       | B/3528-21               | T494B685(1)016A(2)           | 1.1                    | 6.0                    | 1.2                     | 266                              | 239                  | 106                   | 1                      |
| 16            | 6.8       | A/3216-18               | T494A685(1)016A(2)           | 1.1                    | 6.0                    | 3.0                     | 158                              | 142                  | 63                    | 1                      |
| 16            | 10        | C/6032-28               | T494C106(1)016A(2)           | 1.6                    | 6.0                    | 0.6                     | 428                              | 385                  | 171                   | 1                      |
| 16            | 10        | U/6032-15               | T494U106(1)016A(2)           | 1.6                    | 6.0                    | 1.0                     | 300                              | 270                  | 120                   | 1                      |
| 16            | 10        | B/3528-21               | T494B106(1)016A(2)           | 1.6                    | 6.0                    | 0.8                     | 326                              | 293                  | 130                   | 1                      |
| 16            | 10        | A/3216-18               | T494A106(1)016A(2)           | 1.6                    | 8.0                    | 3.0                     | 158                              | 142                  | 63                    | 1                      |
| 16            | 10        | T/3528-12               | T494T106(1)016A(2)           | 1.6                    | 8.0                    | 6.0                     | 108                              | 97                   | 43                    | 1                      |
| 16            | 15        | C/6032-28               | T494C156(1)016A(2)           | 2.4                    | 6.0                    | 0.4                     | 524                              | 472                  | 210                   | 1                      |
| 16            | 15        | U/6032-15               | T494U156(1)016A(2)           | 2.4                    | 6.0                    | 0.8                     | 335                              | 302                  | 134                   | 1                      |
| 16            | 15        | B/3528-21               | T494B156(1)016A(2)           | 2.4                    | 6.0                    | 0.8                     | 326                              | 293                  | 130                   | 1                      |
| 16            | 22        | D/7343-31               | T494D226(1)016A(2)           | 3.5                    | 6.0                    | 0.25                    | 775                              | 698                  | 310                   | 1                      |
| 16            | 22        | C/6032-28               | T494C226(1)016A(2)           | 3.5                    | 6.0                    | 0.35                    | 561                              | 505                  | 224                   | 1                      |
| 16            | 22        | U/6032-15               | T494U226(1)016A(2)           | 3.5                    | 10.0                   | 1.80                    | 224                              | 202                  | 90                    | 1                      |
| 16            | 22        | B/3528-21               | T494B226(1)016A(2)           | 3.5                    | 6.0                    | 1.00                    | 292                              | 263                  | 117                   | 1                      |
| 16            | 33        | D/7343-31               | T494D336(1)016A(2)           | 5.3                    | 6.0                    | 0.25                    | 775                              | 698                  | 310                   | 1                      |
| 16            | 33        | C/6032-28               | T494C336(1)016A(2)           | 5.3                    | 6.0                    | 0.30                    | 606                              | 545                  | 242                   | 1                      |
| 16            | 33        | U/6032-15               | T494U336(1)016A(2)           | 5.3                    | 12.0                   | 2.20                    | 202                              | 182                  | 81                    | 1                      |
| 16            | 33        | B/3528-21               | T494B336(1)016A(2)           | 5.3                    | 8.0                    | 1.20                    | 266                              | 239                  | 106                   | 1                      |
| 16            | 47        | D/7343-31               | T494D476(1)016A(2)           | 7.5                    | 6.0                    | 0.2                     | 866                              | 779                  | 346                   | 1                      |
| 16            | 47        | V/7343-20               | T494V476(1)016A(2)           | 7.5                    | 6.0                    | 0.3                     | 645                              | 581                  | 258                   | 1                      |
| 16            | 47        | C/6032-28               | T494C476(1)016A(2)           | 7.5                    | 6.0                    | 0.5                     | 469                              | 422                  | 188                   | 1                      |
| 16            | 68        | D/7343-31               | T494D686(1)016A(2)           | 10.9                   | 6.0                    | 0.15                    | 1000                             | 900                  | 400                   | 1                      |
| 16            | 68        | V/7343-20               | T494V686(1)016A(2)           | 10.9                   | 6.0                    | 0.5                     | 500                              | 450                  | 200                   | 1                      |
| VDC           | µF        | KEMET/EIA               | (See below for part options) | µA @ 20°C<br>Max/5 Min | % @ 20°C<br>120 Hz Max | Ω @ 20°C<br>100 kHz Max | (mA) 100 kHz<br>25°C             | (mA) 100 kHz<br>85°C | (mA) 100 kHz<br>125°C | Reflow Temp<br>≤ 260°C |
| Rated Voltage | Rated Cap | Case Code/<br>Case Size | KEMET Part Number            | DC Leakage             | DF                     | ESR                     | Maximum Allowable Ripple Current |                      |                       | Moisture Sensitivity   |

(1) To complete KEMET part number, insert M for ±20% or K for ±10%. Designates capacitance tolerance.

(2) To complete KEMET part number, insert T = 100% Matte Tin (Sn) Plated, G = Gold Plated, H = Standard Solder coated (SnPb 5% Pb minimum). Designates termination finish.

Refer to Ordering Information for additional detail.

Higher voltage ratings and tighter tolerance product including ESR may be substituted within the same size at KEMET's option. Voltage substitution will be marked with the higher voltage rating. Substitutions can include better than series.



**Table 1 – Ratings & Part Number Reference cont'd**

| Rated Voltage | Rated Cap | Case Code/<br>Case Size | KEMET Part Number            | DC Leakage             | DF                     | ESR                     | Maximum Allowable Ripple Current |                      |                       | Moisture Sensitivity   |
|---------------|-----------|-------------------------|------------------------------|------------------------|------------------------|-------------------------|----------------------------------|----------------------|-----------------------|------------------------|
| VDC           | µF        | KEMET/EIA               | (See below for part options) | µA @ 20°C<br>Max/5 Min | % @ 20°C<br>120 Hz Max | Ω @ 20°C<br>100 kHz Max | (mA) 100 kHz<br>25°C             | (mA) 100 kHz<br>85°C | (mA) 100 kHz<br>125°C | Reflow Temp<br>≤ 260°C |
| 16            | 68        | C/6032-28               | T494C686(1)016A(2)           | 10.9                   | 12.0                   | 1.0                     | 332                              | 299                  | 133                   | 1                      |
| 16            | 100       | X/7343-43               | T494X107(1)016A(2)           | 16.0                   | 8.0                    | 0.15                    | 1049                             | 944                  | 420                   | 1                      |
| 16            | 100       | D/7343-31               | T494D107(1)016A(2)           | 16.0                   | 8.0                    | 0.15                    | 1000                             | 900                  | 400                   | 1                      |
| 16            | 100       | V/7343-20               | T494V107(1)016A(2)           | 16.0                   | 12.0                   | 0.5                     | 500                              | 450                  | 200                   | 1                      |
| 16            | 150       | X/7343-43               | T494X157(1)016A(2)           | 24.0                   | 8.0                    | 0.15                    | 1049                             | 944                  | 420                   | 1                      |
| 16            | 150       | D/7343-31               | T494D157(1)016A(2)           | 24.0                   | 12.0                   | 0.4                     | 612                              | 551                  | 245                   | 1                      |
| 16            | 220       | X/7343-43               | T494X227(1)016A(2)           | 35.2                   | 10.0                   | 0.4                     | 642                              | 578                  | 257                   | 1                      |
| 16            | 220       | E/7360-38               | T494E227(1)016A(2)           | 35.2                   | 7.2                    | 0.5                     | 632                              | 569                  | 253                   | 1                      |
| 20            | 0.68      | A/3216-18               | T494A684(1)020A(2)           | 0.5                    | 4.0                    | 8.0                     | 97                               | 87                   | 39                    | 1                      |
| 20            | 1         | A/3216-18               | T494A105(1)020A(2)           | 0.5                    | 4.0                    | 5.5                     | 117                              | 105                  | 47                    | 1                      |
| 20            | 1         | S/3216-12               | T494S105(1)020A(2)           | 0.5                    | 6.0                    | 10.0                    | 77                               | 69                   | 31                    | 1                      |
| 20            | 1.5       | A/3216-18               | T494A155(1)020AS(2)          | 0.5                    | 6.0                    | 4.5                     | 129                              | 116                  | 52                    | 1                      |
| 20            | 1.5       | S/3216-12               | T494S155(1)020A(2)           | 0.5                    | 6.0                    | 9.0                     | 82                               | 74                   | 33                    | 1                      |
| 20            | 2.2       | B/3528-21               | T494B225(1)020A(2)           | 0.5                    | 6.0                    | 1.5                     | 238                              | 214                  | 95                    | 1                      |
| 20            | 2.2       | A/3216-18               | T494A225(1)020A(2)           | 0.5                    | 6.0                    | 4.0                     | 137                              | 123                  | 55                    | 1                      |
| 20            | 3.3       | B/3528-21               | T494B335(1)020A(2)           | 0.7                    | 6.0                    | 1.3                     | 256                              | 230                  | 102                   | 1                      |
| 20            | 3.3       | A/3216-18               | T494A335(1)020A(2)           | 0.7                    | 6.0                    | 4.0                     | 137                              | 123                  | 55                    | 1                      |
| 20            | 3.3       | T/3528-12               | T494T335(1)020A(2)           | 0.7                    | 6.0                    | 4.0                     | 132                              | 119                  | 53                    | 1                      |
| 20            | 4.7       | C/6032-28               | T494C475(1)020A(2)           | 0.9                    | 6.0                    | 0.6                     | 428                              | 385                  | 171                   | 1                      |
| 20            | 4.7       | B/3528-21               | T494B475(1)020A(2)           | 0.9                    | 6.0                    | 1.0                     | 292                              | 263                  | 117                   | 1                      |
| 20            | 4.7       | A/3216-18               | T494A475(1)020A(2)           | 0.9                    | 6.0                    | 3.0                     | 158                              | 142                  | 63                    | 1                      |
| 20            | 6.8       | C/6032-28               | T494C685(1)020A(2)           | 1.4                    | 6.0                    | 0.6                     | 428                              | 385                  | 171                   | 1                      |
| 20            | 6.8       | U/6032-15               | T494U685(1)020A(2)           | 1.4                    | 6.0                    | 1.4                     | 254                              | 229                  | 102                   | 1                      |
| 20            | 6.8       | B/3528-21               | T494B685(1)020A(2)           | 1.4                    | 6.0                    | 1.0                     | 292                              | 263                  | 117                   | 1                      |
| 20            | 6.8       | A/3216-18               | T494A685(M)020A(2)           | 1.4                    | 8.0                    | 3.0                     | 158                              | 142                  | 63                    | 1                      |
| 20            | 10        | C/6032-28               | T494C106(1)020A(2)           | 2.0                    | 6.0                    | 0.5                     | 469                              | 422                  | 188                   | 1                      |
| 20            | 10        | U/6032-15               | T494U106(1)020A(2)           | 2.0                    | 6.0                    | 0.8                     | 335                              | 302                  | 134                   | 1                      |
| 20            | 10        | B/3528-21               | T494B106(1)020A(2)           | 2.0                    | 6.0                    | 1.0                     | 292                              | 263                  | 117                   | 1                      |
| 20            | 10        | A/3216-18               | T494A106(M)020A(2)           | 2.0                    | 10.0                   | 3.0                     | 158                              | 142                  | 63                    | 1                      |
| 20            | 15        | D/7343-31               | T494D156(1)020A(2)           | 3.0                    | 6.0                    | 0.35                    | 655                              | 590                  | 262                   | 1                      |
| 20            | 15        | C/6032-28               | T494C156(1)020A(2)           | 3.0                    | 6.0                    | 0.40                    | 524                              | 472                  | 210                   | 1                      |
| 20            | 22        | D/7343-31               | T494D226(1)020A(2)           | 4.4                    | 6.0                    | 0.3                     | 707                              | 636                  | 283                   | 1                      |
| 20            | 22        | V/7343-20               | T494V226(1)020A(2)           | 4.4                    | 6.0                    | 0.4                     | 559                              | 503                  | 224                   | 1                      |
| 20            | 22        | C/6032-28               | T494C226(1)020A(2)           | 4.4                    | 6.0                    | 0.4                     | 524                              | 472                  | 210                   | 1                      |
| 20            | 22        | B/3528-21               | T494B226(1)020A(2)           | 4.4                    | 8.0                    | 3.0                     | 168                              | 151                  | 67                    | 1                      |
| 20            | 33        | D/7343-31               | T494D336(1)020A(2)           | 6.6                    | 6.0                    | 0.25                    | 775                              | 698                  | 310                   | 1                      |
| 20            | 33        | C/6032-28               | T494C336(M)020A(2)           | 6.6                    | 6.0                    | 0.40                    | 524                              | 472                  | 210                   | 1                      |
| 20            | 33        | V/7343-20               | T494V336(1)020A(2)           | 6.6                    | 8.0                    | 0.40                    | 559                              | 503                  | 224                   | 1                      |
| 20            | 33        | B/3528-21               | T494B336(M)020A(2)           | 6.6                    | 10.0                   | 3.00                    | 168                              | 151                  | 67                    | 1                      |
| 20            | 47        | C/6032-28               | T494C476(M)020A(2)           | 9.4                    | 10.0                   | 0.80                    | 371                              | 334                  | 148                   | 1                      |
| 20            | 47        | D/7343-31               | T494D476(1)020A(2)           | 9.4                    | 6.0                    | 0.20                    | 866                              | 779                  | 346                   | 1                      |
| 20            | 68        | X/7343-43               | T494X686(1)020A(2)           | 13.6                   | 6.0                    | 0.20                    | 908                              | 817                  | 363                   | 1                      |
| 20            | 68        | D/7343-31               | T494D686(1)020A(2)           | 13.6                   | 8.0                    | 0.20                    | 866                              | 779                  | 346                   | 1                      |
| 20            | 100       | D/7343-31               | T494D107(1)020A(2)           | 20.0                   | 6.0                    | 0.68                    | 471                              | 424                  | 188                   | 1                      |
| 20            | 100       | X/7343-43               | T494X107(1)020A(2)           | 20.0                   | 8.0                    | 0.15                    | 1049                             | 944                  | 420                   | 1                      |
| 20            | 100       | E/7360-38               | T494E107(1)020A(2)           | 20.0                   | 8.0                    | 0.30                    | 816                              | 734                  | 326                   | 1                      |
| 20            | 150       | X/7343-43               | T494X157(1)020A(2)           | 30.0                   | 10.0                   | 0.30                    | 742                              | 668                  | 297                   | 1                      |
| 25            | 0.33      | A/3216-18               | T494A334(1)025A(2)           | 0.5                    | 4.0                    | 10.0                    | 87                               | 78                   | 35                    | 1                      |
| 25            | 0.47      | A/3216-18               | T494A474(1)025A(2)           | 0.5                    | 4.0                    | 9.0                     | 91                               | 82                   | 36                    | 1                      |
| 25            | 0.68      | A/3216-18               | T494A684(1)025A(2)           | 0.5                    | 4.0                    | 6.0                     | 112                              | 101                  | 45                    | 1                      |
| 25            | 1         | B/3528-21               | T494B105(1)025A(2)           | 0.5                    | 4.0                    | 2.0                     | 206                              | 185                  | 82                    | 1                      |
| VDC           | µF        | KEMET/EIA               | (See below for part options) | µA @ 20°C<br>Max/5 Min | % @ 20°C<br>120 Hz Max | Ω @ 20°C<br>100 kHz Max | (mA) 100 kHz<br>25°C             | (mA) 100 kHz<br>85°C | (mA) 100 kHz<br>125°C | Reflow Temp<br>≤ 260°C |
| Rated Voltage | Rated Cap | Case Code/<br>Case Size | KEMET Part Number            | DC Leakage             | DF                     | ESR                     | Maximum Allowable Ripple Current |                      |                       | Moisture Sensitivity   |

(1) To complete KEMET part number, insert M for ±20% or K for ±10%. Designates capacitance tolerance.

(2) To complete KEMET part number, insert T = 100% Matte Tin (Sn) Plated, G = Gold Plated, H = Standard Solder coated (SnPb 5% Pb minimum). Designates termination finish.

Refer to Ordering Information for additional detail.

Higher voltage ratings and tighter tolerance product including ESR may be substituted within the same size at KEMET's option. Voltage substitution will be marked with the higher voltage rating. Substitutions can include better than series.

**Table 1 – Ratings & Part Number Reference cont'd**

| Rated Voltage | Rated Cap | Case Code/<br>Case Size | KEMET Part Number            | DC Leakage             | DF                     | ESR                     | Maximum Allowable Ripple Current |                      |                       | Moisture Sensitivity   |
|---------------|-----------|-------------------------|------------------------------|------------------------|------------------------|-------------------------|----------------------------------|----------------------|-----------------------|------------------------|
| VDC           | µF        | KEMET/EIA               | (See below for part options) | µA @ 20°C<br>Max/5 Min | % @ 20°C<br>120 Hz Max | Ω @ 20°C<br>100 kHz Max | (mA) 100 kHz<br>25°C             | (mA) 100 kHz<br>85°C | (mA) 100 kHz<br>125°C | Reflow Temp<br>≤ 260°C |
| 25            | 1         | A/3216-18               | T494A105(1)025A(2)           | 0.5                    | 4.0                    | 4.0                     | 137                              | 123                  | 55                    | 1                      |
| 25            | 1.5       | B/3528-21               | T494B155(1)025A(2)           | 0.5                    | 6.0                    | 1.5                     | 238                              | 214                  | 95                    | 1                      |
| 25            | 1.5       | A/3216-18               | T494A155(1)025A(2)           | 0.5                    | 6.0                    | 3.0                     | 158                              | 142                  | 63                    | 1                      |
| 25            | 2.2       | C/6032-28               | T494C225(1)025A(2)           | 0.6                    | 6.0                    | 2.2                     | 224                              | 202                  | 90                    | 1                      |
| 25            | 2.2       | B/3528-21               | T494B225(1)025A(2)           | 0.6                    | 6.0                    | 1.2                     | 266                              | 239                  | 106                   | 1                      |
| 25            | 2.2       | A/3216-18               | T494A225(1)025A(2)           | 0.6                    | 6.0                    | 3.0                     | 158                              | 142                  | 63                    | 1                      |
| 25            | 3.3       | C/6032-28               | T494C335(1)025A(2)           | 0.8                    | 6.0                    | 1.2                     | 303                              | 273                  | 121                   | 1                      |
| 25            | 3.3       | B/3528-21               | T494B335(1)025A(2)           | 0.8                    | 6.0                    | 2.0                     | 206                              | 185                  | 82                    | 1                      |
| 25            | 3.3       | A/3216-18               | T494A335(1)025A(2)           | 0.8                    | 6.0                    | 3.0                     | 158                              | 142                  | 63                    | 1                      |
| 25            | 4.7       | C/6032-28               | T494C475(1)025A(2)           | 1.2                    | 6.0                    | 0.6                     | 428                              | 385                  | 171                   | 1                      |
| 25            | 4.7       | B/3528-21               | T494B475(1)025A(2)           | 1.2                    | 6.0                    | 1.0                     | 292                              | 263                  | 117                   | 1                      |
| 25            | 4.7       | A/3216-18               | T494A475(M)025A(2)           | 1.2                    | 8.0                    | 3.0                     | 158                              | 142                  | 63                    | 1                      |
| 25            | 6.8       | C/6032-28               | T494C685(1)025A(2)           | 1.7                    | 6.0                    | 0.6                     | 428                              | 385                  | 171                   | 1                      |
| 25            | 6.8       | B/3528-21               | T494B685(1)025A(2)           | 1.7                    | 8.0                    | 2.0                     | 206                              | 185                  | 82                    | 1                      |
| 25            | 10        | D/7343-31               | T494D106(1)025A(2)           | 2.5                    | 6.0                    | 0.4                     | 612                              | 551                  | 245                   | 1                      |
| 25            | 10        | C/6032-28               | T494C106(1)025A(2)           | 2.5                    | 6.0                    | 0.6                     | 428                              | 385                  | 171                   | 1                      |
| 25            | 10        | B/3528-21               | T494B106(1)025A(2)           | 2.5                    | 8.0                    | 3.0                     | 168                              | 151                  | 67                    | 1                      |
| 25            | 15        | D/7343-31               | T494D156(1)025A(2)           | 3.8                    | 6.0                    | 0.35                    | 655                              | 590                  | 262                   | 1                      |
| 25            | 15        | C/6032-28               | T494C156(1)025A(2)           | 3.8                    | 6.0                    | 0.90                    | 350                              | 315                  | 140                   | 1                      |
| 25            | 15        | B/3528-21               | T494B156(1)025A(2)           | 3.8                    | 8.0                    | 3.00                    | 168                              | 151                  | 67                    | 1                      |
| 25            | 22        | D/7343-31               | T494D226(1)025A(2)           | 5.5                    | 6.0                    | 0.3                     | 707                              | 636                  | 283                   | 1                      |
| 25            | 22        | C/6032-28               | T494C226(1)025A(2)           | 5.5                    | 6.0                    | 1.0                     | 332                              | 299                  | 133                   | 1                      |
| 25            | 22        | V/7343-20               | T494V226(1)025A(2)           | 5.5                    | 6.0                    | 0.5                     | 500                              | 450                  | 200                   | 1                      |
| 25            | 33        | X/7343-43               | T494X336(1)025A(2)           | 8.3                    | 6.0                    | 0.3                     | 742                              | 668                  | 297                   | 1                      |
| 25            | 33        | D/7343-31               | T494D336(1)025A(2)           | 8.3                    | 6.0                    | 0.4                     | 612                              | 551                  | 245                   | 1                      |
| 25            | 33        | C/6032-28               | T494C336(1)025A(2)           | 8.3                    | 10.0                   | 1.0                     | 332                              | 299                  | 133                   | 1                      |
| 25            | 47        | X/7343-43               | T494X476(1)025A(2)           | 11.8                   | 6.0                    | 0.3                     | 742                              | 668                  | 297                   | 1                      |
| 25            | 47        | D/7343-31               | T494D476(1)025A(2)           | 11.8                   | 10.0                   | 0.2                     | 866                              | 779                  | 346                   | 1                      |
| 25            | 68        | X/7343-43               | T494X686(M)025A(2)           | 17.0                   | 8.0                    | 0.3                     | 742                              | 668                  | 297                   | 1                      |
| 25            | 68        | D/7343-31               | T494D686(M)025A(2)           | 17.0                   | 10.0                   | 0.5                     | 548                              | 493                  | 219                   | 1                      |
| 25            | 100       | X/7343-43               | T494X107(M)025A(2)           | 25.0                   | 8.0                    | 0.25                    | 812                              | 731                  | 325                   | 1                      |
| 35            | 0.1       | A/3216-18               | T494A104(1)035A(2)           | 0.5                    | 4.0                    | 10.0                    | 87                               | 78                   | 35                    | 1                      |
| 35            | 0.15      | A/3216-18               | T494A154(1)035A(2)           | 0.5                    | 4.0                    | 6.0                     | 112                              | 101                  | 45                    | 1                      |
| 35            | 0.22      | A/3216-18               | T494A224(1)035A(2)           | 0.5                    | 4.0                    | 6.0                     | 112                              | 101                  | 45                    | 1                      |
| 35            | 0.33      | A/3216-18               | T494A334(1)035A(2)           | 0.5                    | 4.0                    | 6.0                     | 112                              | 101                  | 45                    | 1                      |
| 35            | 0.47      | B/3528-21               | T494B474(1)035A(2)           | 0.5                    | 4.0                    | 2.5                     | 184                              | 166                  | 74                    | 1                      |
| 35            | 0.47      | A/3216-18               | T494A474(1)035A(2)           | 0.5                    | 4.0                    | 4.0                     | 137                              | 123                  | 55                    | 1                      |
| 35            | 0.68      | B/3528-21               | T494B684(1)035A(2)           | 0.5                    | 4.0                    | 2.5                     | 184                              | 166                  | 74                    | 1                      |
| 35            | 0.68      | A/3216-18               | T494A684(1)035A(2)           | 0.5                    | 4.0                    | 6.0                     | 112                              | 101                  | 45                    | 1                      |
| 35            | 1         | B/3528-21               | T494B105(1)035A(2)           | 0.5                    | 4.0                    | 2.0                     | 206                              | 185                  | 82                    | 1                      |
| 35            | 1         | A/3216-18               | T494A105(1)035A(2)           | 0.5                    | 4.0                    | 6.0                     | 112                              | 101                  | 45                    | 1                      |
| 35            | 1.5       | A/3216-18               | T494A155(1)035A(2)           | 0.5                    | 6.0                    | 4.0                     | 137                              | 123                  | 55                    | 1                      |
| 35            | 1.5       | C/6032-28               | T494C155(1)035A(2)           | 0.5                    | 6.0                    | 2.5                     | 210                              | 189                  | 84                    | 1                      |
| 35            | 1.5       | B/3528-21               | T494B155(1)035A(2)           | 0.5                    | 6.0                    | 3.0                     | 168                              | 151                  | 67                    | 1                      |
| 35            | 2.2       | A/3216-18               | T494A225(1)035A(2)           | 0.8                    | 6.0                    | 3.0                     | 158                              | 142                  | 63                    | 1                      |
| 35            | 2.2       | C/6032-28               | T494C225(1)035A(2)           | 0.8                    | 6.0                    | 1.5                     | 271                              | 244                  | 108                   | 1                      |
| 35            | 2.2       | B/3528-21               | T494B225(1)035A(2)           | 0.8                    | 6.0                    | 2.5                     | 184                              | 166                  | 74                    | 1                      |
| 35            | 3.3       | C/6032-28               | T494C335(1)035A(2)           | 1.2                    | 6.0                    | 0.8                     | 371                              | 334                  | 148                   | 1                      |
| 35            | 3.3       | B/3528-21               | T494B335(1)035A(2)           | 1.2                    | 6.0                    | 1.3                     | 256                              | 230                  | 102                   | 1                      |
| 35            | 4.7       | B/3528-21               | T494B475(1)035A(2)           | 1.6                    | 6.0                    | 1.5                     | 238                              | 214                  | 95                    | 1                      |
| 35            | 4.7       | D/7343-31               | T494D475(1)035A(2)           | 1.6                    | 6.0                    | 0.7                     | 463                              | 417                  | 185                   | 1                      |
| VDC           | µF        | KEMET/EIA               | (See below for part options) | µA @ 20°C<br>Max/5 Min | % @ 20°C<br>120 Hz Max | Ω @ 20°C<br>100 kHz Max | (mA) 100 kHz<br>25°C             | (mA) 100 kHz<br>85°C | (mA) 100 kHz<br>125°C | Reflow Temp<br>≤ 260°C |
| Rated Voltage | Rated Cap | Case Code/<br>Case Size | KEMET Part Number            | DC Leakage             | DF                     | ESR                     | Maximum Allowable Ripple Current |                      |                       | Moisture Sensitivity   |

(1) To complete KEMET part number, insert M for ±20% or K for ±10%. Designates capacitance tolerance.

(2) To complete KEMET part number, insert T = 100% Matte Tin (Sn) Plated, G = Gold Plated, H = Standard Solder coated (SnPb 5% Pb minimum). Designates termination finish.

Refer to Ordering Information for additional detail.

Higher voltage ratings and tighter tolerance product including ESR may be substituted within the same size at KEMET's option. Voltage substitution will be marked with the higher voltage rating. Substitutions can include better than series.

**Table 1 – Ratings & Part Number Reference cont'd**

| Rated Voltage | Rated Cap | Case Code/<br>Case Size | KEMET Part Number            | DC Leakage             | DF                     | ESR                     | Maximum Allowable Ripple Current |                      |                       | Moisture Sensitivity   |
|---------------|-----------|-------------------------|------------------------------|------------------------|------------------------|-------------------------|----------------------------------|----------------------|-----------------------|------------------------|
| VDC           | μF        | KEMET/EIA               | (See below for part options) | μA @ 20°C<br>Max/5 Min | % @ 20°C<br>120 Hz Max | Ω @ 20°C<br>100 kHz Max | (mA) 100 kHz<br>25°C             | (mA) 100 kHz<br>85°C | (mA) 100 kHz<br>125°C | Reflow Temp<br>≤ 260°C |
| 35            | 4.7       | C/6032-28               | T494C475(1)035A(2)           | 1.6                    | 6.0                    | 0.7                     | 396                              | 356                  | 158                   | 1                      |
| 35            | 6.8       | D/7343-31               | T494D685(1)035A(2)           | 2.4                    | 6.0                    | 0.5                     | 548                              | 493                  | 219                   | 1                      |
| 35            | 6.8       | C/6032-28               | T494C685(1)035A(2)           | 2.4                    | 6.0                    | 0.9                     | 350                              | 315                  | 140                   | 1                      |
| 35            | 10        | D/7343-31               | T494D106(1)035A(2)           | 3.5                    | 6.0                    | 0.4                     | 612                              | 551                  | 245                   | 1                      |
| 35            | 10        | C/6032-28               | T494C106(1)035A(2)           | 3.5                    | 6.0                    | 1.2                     | 303                              | 273                  | 121                   | 1                      |
| 35            | 10        | V/7343-20               | T494V106(1)035A(2)           | 3.5                    | 6.0                    | 0.8                     | 395                              | 356                  | 158                   | 1                      |
| 35            | 15        | X/7343-43               | T494X156(1)035A(2)           | 5.3                    | 6.0                    | 0.30                    | 742                              | 668                  | 297                   | 1                      |
| 35            | 15        | D/7343-31               | T494D156(1)035A(2)           | 5.3                    | 6.0                    | 0.35                    | 655                              | 590                  | 262                   | 1                      |
| 35            | 22        | X/7343-43               | T494X226(1)035A(2)           | 7.7                    | 6.0                    | 0.3                     | 742                              | 668                  | 297                   | 1                      |
| 35            | 22        | D/7343-31               | T494D226(1)035A(2)           | 7.7                    | 6.0                    | 0.4                     | 612                              | 551                  | 245                   | 1                      |
| 35            | 33        | D/7343-31               | T494D336(1)035A(2)           | 11.6                   | 6.0                    | 0.6                     | 500                              | 450                  | 200                   | 1                      |
| 35            | 33        | X/7343-43               | T494X336(1)035A(2)           | 11.6                   | 6.0                    | 0.6                     | 524                              | 472                  | 210                   | 1                      |
| 35            | 47        | X/7343-43               | T494X476(1)035A(2)           | 16.5                   | 8.0                    | 0.5                     | 574                              | 517                  | 230                   | 1                      |
| 35            | 47        | E/7360-38               | T494E476(1)035A(2)           | 16.5                   | 10.0                   | 0.3                     | 816                              | 734                  | 326                   | 1                      |
| 50            | 0.1       | A/3216-18               | T494A104(1)050A(2)           | 0.5                    | 4.0                    | 10.0                    | 87                               | 78                   | 35                    | 1                      |
| 50            | 0.15      | A/3216-18               | T494A154(1)050A(2)           | 0.5                    | 4.0                    | 10.0                    | 87                               | 78                   | 35                    | 1                      |
| 50            | 0.22      | A/3216-18               | T494A224(1)050A(2)           | 0.5                    | 4.0                    | 12.0                    | 79                               | 71                   | 32                    | 1                      |
| 50            | 0.22      | B/3528-21               | T494B224(1)050A(2)           | 0.5                    | 4.0                    | 10.0                    | 92                               | 83                   | 37                    | 1                      |
| 50            | 0.33      | A/3216-18               | T494A334(1)050A(2)           | 0.5                    | 4.0                    | 9.0                     | 91                               | 82                   | 36                    | 1                      |
| 50            | 0.33      | B/3528-21               | T494B334(1)050A(2)           | 0.5                    | 4.0                    | 2.5                     | 184                              | 166                  | 74                    | 1                      |
| 50            | 0.47      | A/3216-18               | T494A474(1)050A(2)           | 0.5                    | 4.0                    | 6.0                     | 112                              | 101                  | 45                    | 1                      |
| 50            | 0.47      | C/6032-28               | T494C474(1)050A(2)           | 0.5                    | 4.0                    | 1.8                     | 247                              | 222                  | 99                    | 1                      |
| 50            | 0.47      | B/3528-21               | T494B474(1)050A(2)           | 0.5                    | 4.0                    | 2.0                     | 206                              | 185                  | 82                    | 1                      |
| 50            | 0.68      | A/3216-18               | T494A684(1)050A(2)           | 0.5                    | 4.0                    | 5.0                     | 122                              | 110                  | 49                    | 1                      |
| 50            | 0.68      | C/6032-28               | T494C684(1)050A(2)           | 0.5                    | 4.0                    | 1.6                     | 262                              | 236                  | 105                   | 1                      |
| 50            | 0.68      | B/3528-21               | T494B684(1)050A(2)           | 0.5                    | 4.0                    | 3.0                     | 168                              | 151                  | 67                    | 1                      |
| 50            | 1         | A/3216-18               | T494A105(1)050A(2)           | 0.5                    | 4.0                    | 5.0                     | 122                              | 110                  | 49                    | 1                      |
| 50            | 1         | C/6032-28               | T494C105(1)050A(2)           | 0.5                    | 4.0                    | 1.6                     | 262                              | 236                  | 105                   | 1                      |
| 50            | 1         | B/3528-21               | T494B105(1)050A(2)           | 0.5                    | 6.0                    | 4.0                     | 146                              | 131                  | 58                    | 1                      |
| 50            | 1         | V/7343-20               | T494V105(1)050A(2)           | 0.5                    | 4.0                    | 4.0                     | 177                              | 159                  | 71                    | 1                      |
| 50            | 1.5       | D/7343-31               | T494D155(1)050A(2)           | 0.8                    | 6.0                    | 1.0                     | 387                              | 348                  | 155                   | 1                      |
| 50            | 1.5       | C/6032-28               | T494C155(1)050A(2)           | 0.8                    | 6.0                    | 1.5                     | 271                              | 244                  | 108                   | 1                      |
| 50            | 2.2       | D/7343-31               | T494D225(1)050A(2)           | 1.1                    | 6.0                    | 0.8                     | 433                              | 390                  | 173                   | 1                      |
| 50            | 2.2       | C/6032-28               | T494C225(1)050A(2)           | 1.1                    | 6.0                    | 1.5                     | 271                              | 244                  | 108                   | 1                      |
| 50            | 3.3       | D/7343-31               | T494D335(1)050A(2)           | 1.7                    | 6.0                    | 0.8                     | 433                              | 390                  | 173                   | 1                      |
| 50            | 4.7       | D/7343-31               | T494D475(1)050A(2)           | 2.4                    | 6.0                    | 0.6                     | 500                              | 450                  | 200                   | 1                      |
| 50            | 6.8       | X/7343-43               | T494X685(1)050A(2)           | 3.4                    | 6.0                    | 0.5                     | 574                              | 517                  | 230                   | 1                      |
| 50            | 6.8       | D/7343-31               | T494D685(1)050A(2)           | 3.4                    | 6.0                    | 0.7                     | 463                              | 417                  | 185                   | 1                      |
| 50            | 10        | X/7343-43               | T494X106(1)050A(2)           | 5.0                    | 6.0                    | 0.4                     | 642                              | 578                  | 257                   | 1                      |
| 50            | 10        | D/7343-31               | T494D106(1)050A(2)           | 5.0                    | 6.0                    | 0.7                     | 463                              | 417                  | 185                   | 1                      |
| 50            | 15        | X/7343-43               | T494X156(1)050A(2)           | 7.5                    | 6.0                    | 0.4                     | 642                              | 578                  | 257                   | 1                      |
| 50            | 22        | X/7343-43               | T494X226(1)050A(2)           | 11.0                   | 10.0                   | 0.5                     | 574                              | 517                  | 230                   | 1                      |
| VDC           | μF        | KEMET/EIA               | (See below for part options) | μA @ 20°C<br>Max/5 Min | % @ 20°C<br>120 Hz Max | Ω @ 20°C<br>100 kHz Max | (mA) 100 kHz<br>25°C             | (mA) 100 kHz<br>85°C | (mA) 100 kHz<br>125°C | Reflow Temp<br>≤ 260°C |
| Rated Voltage | Rated Cap | Case Code/<br>Case Size | KEMET Part Number            | DC Leakage             | DF                     | ESR                     | Maximum Allowable Ripple Current |                      |                       | Moisture Sensitivity   |

(1) To complete KEMET part number, insert M for ±20% or K for ±10%. Designates capacitance tolerance.


(2) To complete KEMET part number, insert T = 100% Matte Tin (Sn) Plated, G = Gold Plated, H = Standard Solder coated (SnPb 5% Pb minimum). Designates termination finish.

Refer to Ordering Information for additional detail.

Higher voltage ratings and tighter tolerance product including ESR may be substituted within the same size at KEMET's option. Voltage substitution will be marked with the higher voltage rating. Substitutions can include better than series.

## Recommended Voltage Derating Guidelines

|                                                 | -55°C to 85°C         | 85°C to 125°C         |
|-------------------------------------------------|-----------------------|-----------------------|
| % Change in Working DC Voltage with Temperature | V <sub>R</sub>        | 67% of V <sub>R</sub> |
| Recommended Maximum Application Voltage         | 50% of V <sub>R</sub> | 33% of V <sub>R</sub> |

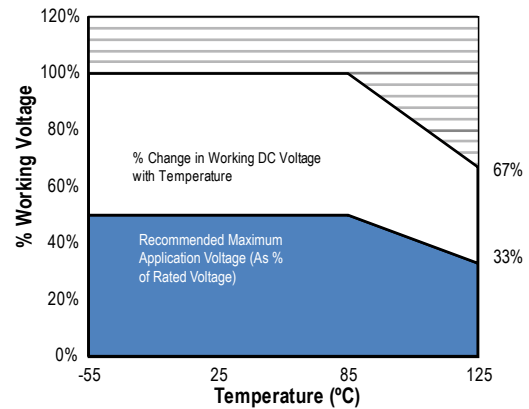

## Ripple Current/Ripple Voltage

Permissible AC ripple voltage and current are related to equivalent series resistance (ESR) and the power dissipation capabilities of the device. Permissible AC ripple voltage which may be applied is limited by two criteria:

1. The positive peak AC voltage plus the DC bias voltage, if any, must not exceed the DC voltage rating of the capacitor.
2. The negative peak AC voltage in combination with bias voltage, if any, must not exceed the allowable limits specified for reverse voltage. See the Reverse Voltage section for allowable limits.

The maximum power dissipation by case size can be determined using the table at right. The maximum power dissipation rating stated in the table must be reduced with increasing environmental operating temperatures. Refer to the table below for temperature compensation requirements.

| KEMET Case Code | EIA Case Code | Maximum Power Dissipation (P max) mWatts @ 25°C w/+20°C Rise |
|-----------------|---------------|--------------------------------------------------------------|
| A               | 3216-18       | 75                                                           |
| B               | 3528-21       | 85                                                           |
| C               | 6032-28       | 110                                                          |
| D               | 7343-31       | 150                                                          |
| X               | 7343-43       | 165                                                          |
| E               | 7360-38       | 200                                                          |
| S               | 3216-12       | 60                                                           |
| T               | 3528-12       | 70                                                           |
| U               | 6032-15       | 90                                                           |
| V               | 7343-20       | 125                                                          |
| T510X           | 7343-43       | 270                                                          |
| T510E           | 7360-38       | 285                                                          |

The maximum power dissipation rating must be reduced with increasing environmental operating temperatures. Refer to the Temperature Compensation Multiplier table for details.

| Temperature Compensation Multipliers for Maximum Ripple Current |          |           |
|-----------------------------------------------------------------|----------|-----------|
| T ≤ 25°C                                                        | T ≤ 85°C | T ≤ 125°C |
| 1.00                                                            | 0.90     | 0.40      |

T = Environmental Temperature

Using the P max of the device, the maximum allowable rms ripple current or voltage may be determined.

$$I(max) = \sqrt{P_{max}/R}$$

$$E(max) = Z \sqrt{P_{max}/R}$$

I = rms ripple current (amperes)

E = rms ripple voltage (volts)

P max = maximum power dissipation (watts)

R = ESR at specified frequency (ohms)

Z = Impedance at specified frequency (ohms)

## Reverse Voltage

Solid tantalum capacitors are polar devices and may be permanently damaged or destroyed if connected with the wrong polarity. The positive terminal is identified on the capacitor body by a stripe plus in some cases a beveled edge. A small degree of transient reverse voltage is permissible for short periods per the table. The capacitors should not be operated continuously in reverse mode, even within these limits.

| Temperature | Permissible Transient Reverse Voltage |
|-------------|---------------------------------------|
| 25°C        | 15% of Rated Voltage                  |
| 85°C        | 5% of Rated Voltage                   |
| 125°C       | 1% of Rated Voltage                   |

**Table 2 – Land Dimensions/Courtyard**

| KEMET          | Metric Size Code | Density Level A:<br>Maximum (Most) Land Protrusion (mm) |      |      |       |      | Density Level B:<br>Median (Nominal) Land Protrusion (mm) |      |      |      |      | Density Level C:<br>Minimum (Least) Land Protrusion (mm) |      |      |      |      |
|----------------|------------------|---------------------------------------------------------|------|------|-------|------|-----------------------------------------------------------|------|------|------|------|----------------------------------------------------------|------|------|------|------|
|                |                  | W                                                       | L    | S    | V1    | V2   | W                                                         | L    | S    | V1   | V2   | W                                                        | L    | S    | V1   | V2   |
| A              | 3216-18          | 1.35                                                    | 2.20 | 0.62 | 6.02  | 2.80 | 1.23                                                      | 1.80 | 0.82 | 4.92 | 2.30 | 1.13                                                     | 1.42 | 0.98 | 4.06 | 2.04 |
| B              | 3528-21          | 2.35                                                    | 2.21 | 0.92 | 6.32  | 4.00 | 2.23                                                      | 1.80 | 1.12 | 5.22 | 3.50 | 2.13                                                     | 1.42 | 1.28 | 4.36 | 3.24 |
| C              | 6032-25          | 2.35                                                    | 2.77 | 2.37 | 8.92  | 4.50 | 2.23                                                      | 2.37 | 2.57 | 7.82 | 4.00 | 2.13                                                     | 1.99 | 2.73 | 6.96 | 3.74 |
| D              | 7343-31          | 2.55                                                    | 2.77 | 3.67 | 10.22 | 5.60 | 2.43                                                      | 2.37 | 3.87 | 9.12 | 5.10 | 2.33                                                     | 1.99 | 4.03 | 8.26 | 4.84 |
| E <sup>1</sup> | 7360-38          | 4.25                                                    | 2.77 | 3.67 | 10.22 | 7.30 | 4.13                                                      | 2.37 | 3.87 | 9.12 | 6.80 | 4.03                                                     | 1.99 | 4.03 | 8.26 | 6.54 |
| S <sup>2</sup> | 3216-12          | 1.35                                                    | 2.20 | 0.62 | 6.02  | 2.80 | 1.23                                                      | 1.80 | 0.82 | 4.92 | 2.30 | 1.13                                                     | 1.42 | 0.98 | 4.06 | 2.04 |
| T              | 3528-12          | 2.35                                                    | 2.20 | 0.92 | 6.32  | 4.00 | 2.23                                                      | 1.80 | 1.12 | 5.22 | 3.50 | 2.13                                                     | 1.42 | 1.28 | 4.36 | 3.24 |
| U              | 6032-15          | 2.35                                                    | 2.77 | 2.37 | 8.92  | 4.50 | 2.23                                                      | 2.37 | 2.57 | 7.82 | 4.00 | 2.13                                                     | 1.99 | 2.73 | 6.96 | 3.74 |
| V              | 7343-20          | 2.55                                                    | 2.77 | 3.67 | 10.22 | 5.60 | 2.43                                                      | 2.37 | 3.87 | 9.12 | 5.10 | 2.33                                                     | 1.99 | 4.03 | 8.26 | 4.84 |
| X <sup>1</sup> | 7343-43          | 2.55                                                    | 2.77 | 3.67 | 10.22 | 5.60 | 2.43                                                      | 2.37 | 3.87 | 9.12 | 5.10 | 2.33                                                     | 1.99 | 4.03 | 8.26 | 4.84 |


**Density Level A:** For low-density product applications. Recommended for wave solder applications and provides a wider process window for reflow solder processes.

**Density Level B:** For products with a moderate level of component density. Provides a robust solder attachment condition for reflow solder processes.

**Density Level C:** For high component density product applications. Before adapting the minimum land pattern variations the user should perform qualification testing based on the conditions outlined in IPC standard 7351 (IPC-7351).

<sup>1</sup> Height of these chips may create problems in wave soldering.

<sup>2</sup> Land pattern geometry is too small for silkscreen outline.

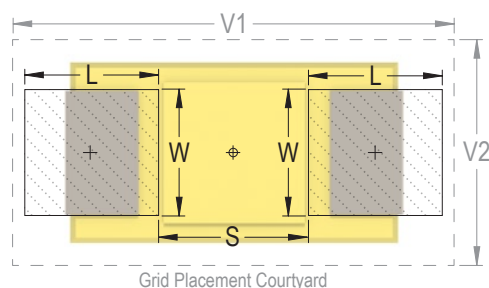

## Soldering Process

KEMET's families of surface mount capacitors are compatible with wave (single or dual), convection, IR, or vapor phase reflow techniques. Preheating of these components is recommended to avoid extreme thermal stress. KEMET's recommended profile conditions for convection and IR reflow reflect the profile conditions of the IPC/J-STD-020D standard for moisture sensitivity testing. The devices can safely withstand a maximum of three reflow passes at these conditions.

Please note that although the X/7343-43 case size can withstand wave soldering, the tall profile (4.3 mm maximum) dictates care in wave process development.

Hand soldering should be performed with care due to the difficulty in process control. If performed, care should be taken to avoid contact of the soldering iron to the molded case. The iron should be used to heat the solder pad, applying solder between the pad and the termination, until reflow occurs. Once reflow occurs, the iron should be removed immediately. "Wiping" the edges of a chip and heating the top surface is not recommended.


During typical reflow operations, a slight darkening of the gold-colored epoxy may be observed. This slight darkening is normal and not harmful to the product. Marking permanency is not affected by this change.

| Profile Feature                                            | SnPb Assembly       | Pb-Free Assembly    |
|------------------------------------------------------------|---------------------|---------------------|
| <b>Preheat/Soak</b>                                        |                     |                     |
| Temperature Minimum ( $T_{\text{Smin}}$ )                  | 100°C               | 150°C               |
| Temperature Maximum ( $T_{\text{Smax}}$ )                  | 150°C               | 200°C               |
| Time ( $t_s$ ) from $T_{\text{Smin}}$ to $T_{\text{Smax}}$ | 60 – 120 seconds    | 60 – 120 seconds    |
| Ramp-up Rate ( $T_L$ to $T_P$ )                            | 3°C/seconds maximum | 3°C/seconds maximum |
| Liquidous Temperature ( $T_L$ )                            | 183°C               | 217°C               |
| Time Above Liquidous ( $t_L$ )                             | 60 – 150 seconds    | 60 – 150 seconds    |
| Peak Temperature ( $T_P$ )                                 | 220°C*<br>235°C**   | 250°C*<br>260°C**   |
| Time within 5°C of Maximum Peak Temperature ( $t_p$ )      | 20 seconds maximum  | 30 seconds maximum  |
| Ramp-down Rate ( $T_P$ to $T_L$ )                          | 6°C/seconds maximum | 6°C/seconds maximum |
| Time 25°C to Peak Temperature                              | 6 minutes maximum   | 8 minutes maximum   |

*Note: All temperatures refer to the center of the package, measured on the package body surface that is facing up during assembly reflow.*

\*Case Size D, E, P, Y, and X

\*\*Case Size A, B, C, H, I, K, M, R, S, T, U, V, W, and Z

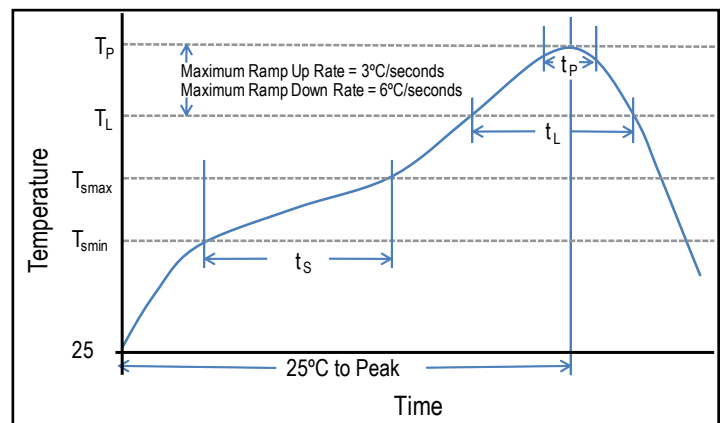


## Storage


Tantalum chip capacitors should be stored in normal working environments. While the chips themselves are quite robust in other environments, solderability will be degraded by exposure to high temperatures, high humidity, corrosive atmospheres, and long term storage. In addition, packaging materials will be degraded by high temperature—reels may soften or warp and tape peel force may increase. KEMET recommends that maximum storage temperature not exceed 40°C and maximum storage humidity not exceed 60% relative humidity. Temperature fluctuations should be minimized to avoid condensation on the parts and atmospheres should be free of chlorine and sulphur bearing compounds. For optimized solderability chip stock should be used promptly, preferably within three years of receipt.



## Construction

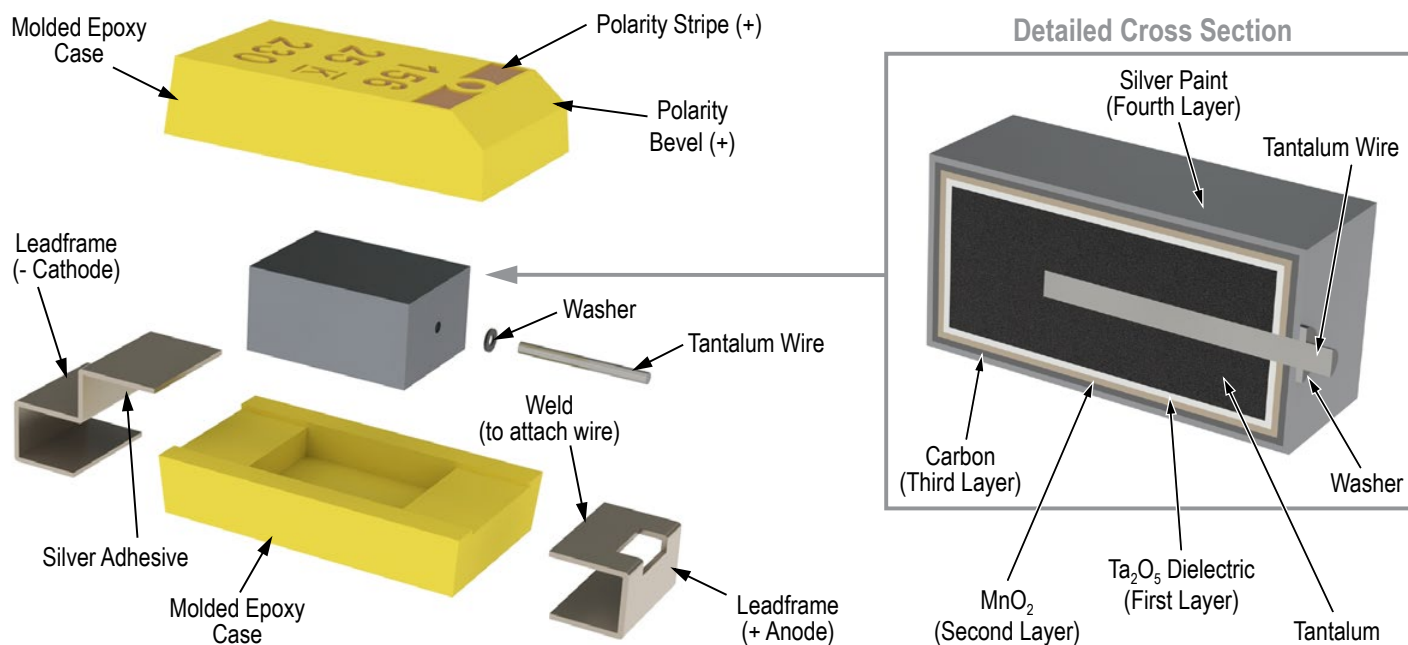

## Capacitor Marking

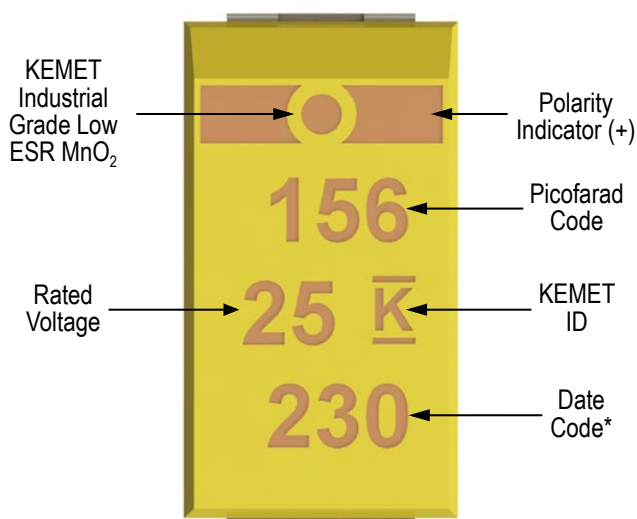

\* 230 = 30<sup>th</sup> week of 2012

| Date Code *                                                  |                                                                                    |
|--------------------------------------------------------------|------------------------------------------------------------------------------------|
| 1 <sup>st</sup> digit = Last number of Year                  | 9 = 2009<br>0 = 2010<br>1 = 2011<br>2 = 2012<br>3 = 2013<br>4 = 2014               |
| 2 <sup>nd</sup> and 3 <sup>rd</sup> digit = Week of the Year | 01 = 1 <sup>st</sup> week of the Year to<br>52 = 52 <sup>nd</sup> week of the Year |