D Series

High Voltage relays 10kV & 15kV

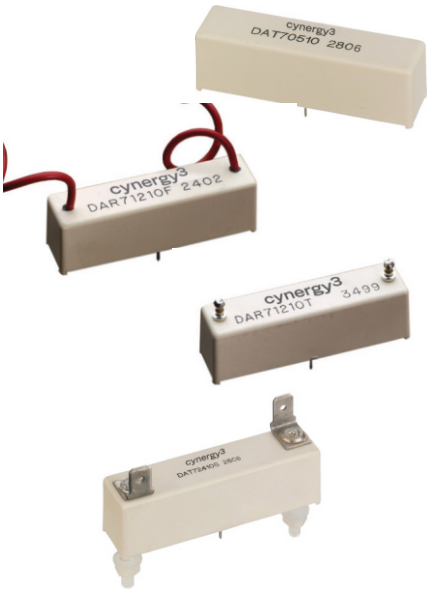

- *10kV or 15kV Isolation*
- *Low Contact Resistance*
- *PCB or Panel Mount*
- *HV connections via Flying Leads, Solder Turret (wire wrap), or 1/4" Spade Terminals*
- *Excellent AC characteristics*

Contact Specification	Unit	Condition	10kV SPNO		10kV SPNC		15kV SPNO		
Contact Material			Rhodium	Tunsten	Rhodium	Tungsten	Tungsten		
Isolation across contacts	kV	DC or AC peak	10	10	10	10	15		
Switching Power Max.	W		50	50	50	50	50		
Switching Voltage Max.	V	DC or AC peak	1000	7000	1000	7000	10000		
Switching Current Max.	A	DC or AC peak	3	2	3	2	2		
Carry Current Max	A	DC or AC peak	4	3	4	3	2		
Capacitance across contacts	pF	coil to screen grounded	<0.2	<0.2	<0.2	<0.2	<0.2		
Lifetime operations		dry switching	10^9	10^9	10^9	10^9	10^9		
		50W switching	10^6	10^6	10^6	10^6	10^6		
Contact Resistance	m	max (typical)	50 (15)	250(100)	50 (15)	250(100)	250 (100)		
Insulation Resistance		min (typical)	10^{10} (10^{13})		10^{10} (10^{13})		10^{10} (10^{13})		
Coil Specification			5V	12V 24V	5V	12V 24V	5V	12V 24V	
Must Operate Voltage	V	DC	3.7	9 20	3.7	9 20	3.7	9 20	
Must Release Voltage	V	DC	0.5	1.25 4	0.5	1.25 4	0.5	1.25 4	
Operate Time	ms	diode fitted	3.0	3.0 3.0	2.0	2.0 2.0	3.0	3.0 3.0	
Release Time	ms	diode fitted	2.0	2.0 2.0	3.0	3.0 3.0	2.0	2.0 2.0	
Resistance			28	150 780	38	240 925	16	95 350	
Relay Specification									
Isolation contact/coil	kV			17		17		17	
Insulation resistance contact to all terminals		min (typical)	10^{10} (10^{13})			10^{10} (10^{13})		10^{10} (10^{13})	
Envirnonmental Operating Temp range	°C		-20 to +70			-20 to +70		-20 to +70	

Very high isolation voltages, up to 15kV, are achieved through the use of high vacuum reed switches with either Rhodium or Tungsten contacts and make these relays suitable for high reliability applications, such as cardiac defibrillators, test equipment and high voltage power supplies.

The Rhodium contact relays have low contact resistance, while the Tungsten contact relays can switch higher voltages.

PCB or Panel Mount, via Nylon studs, versions are available.

Connection options, for the HV, include PCB, solder turret(wire wrap), flying lead and 0.25" spade terminals.

Part Numbering System

D A T 7 12 10 F

Reed Switch Size

Contact Form A=n/o, B=n/c

Contact Material
R=Rhodium,
T=Tungsten

Moulding Ref. No.

Coil Voltage
05=5Vdc, 12=12Vdc,
24=24Vdc

Isolation between Contacts
3=3kV, 5=5kV,
10=10kV, 15=15kV

Mounting or Connection Style
No suffix indicates PCB mount
F=PCB mount & coil connection with Flying lead HV connection
P=Panel mount with wire wrap terminals
S=PCB mount & coil connection with stud fixing & 1/4" spade HV connection (not available on 15kV models)
T=PCB mount & coil connection with stud fixing & wire wrap HV connection

Cynergy3 Components Ltd.
7 Cobham Road
Ferndown Industrial Estate
Wimborne, Dorset BH21 7PE
Telephone +44 (0) 1202 897969

Email:sales@cynergy3.com

ISO9001 CERTIFIED

www.cynergy3.com

© 2013 Cynergy3 Components, All Rights Reserved. Specifications are subject to change without prior notice. Cynergy3 Components and the Cynergy3 Components logo are trademarks of Cynergy3 Components Limited.

MECHANICAL

STANDARD

(e.g. DAT71210)

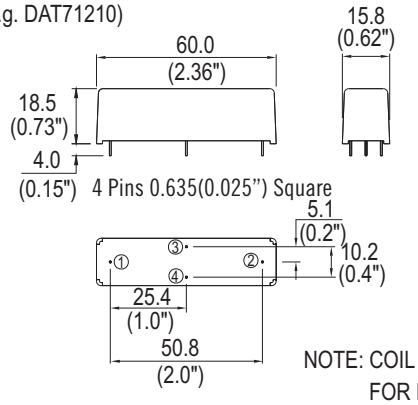

CIRCUIT DIAGRAMS
(ALL VARIANTS)



NOTE: COIL POLARITY IS IMPORTANT FOR FORM B VARIANT ONLY.

PANEL MOUNT

(e.g. DAT71210P)

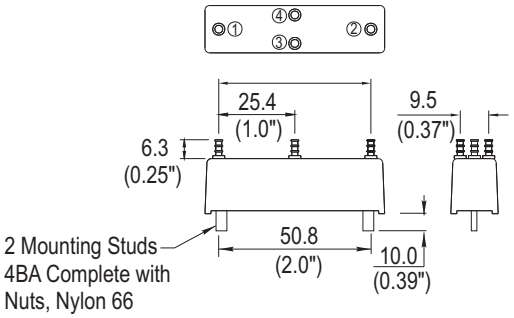

FLYING LEAD

(e.g. DAT71210F)

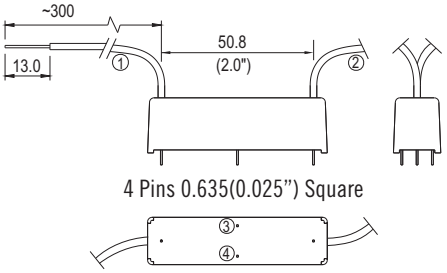

NOTE: PINS WHICH ARE NOT NUMBERED HAVE NO ELECTRICAL CONNECTION.

TURRET (Wire Wrap)

(e.g. DAT71210T)

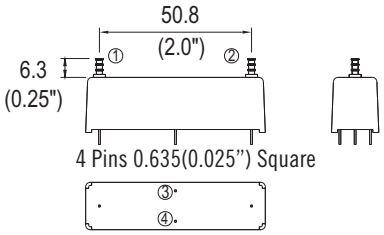

NOTE: PINS WHICH ARE NOT NUMBERED HAVE NO ELECTRICAL CONNECTION.

SPADE TYPE

(e.g. DAT71210S)

'S' Suffix denotes the 0.250" 'Push On' blade connectors, 4BA fixing bolts and Epoxy potting.

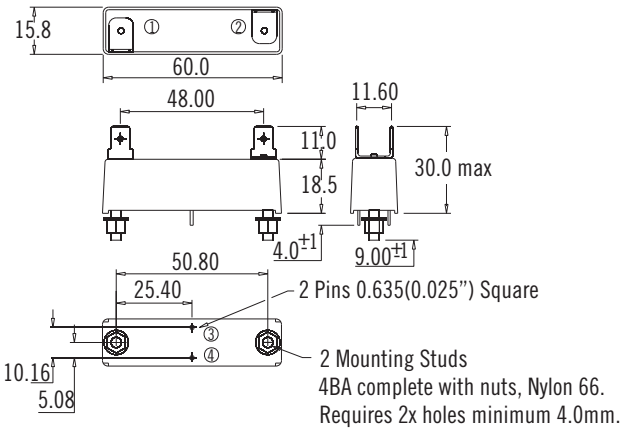

© 2012 Cynergy3 Components, All Rights Reserved. Specifications are subject to change without prior notice. Cynergy3 Components and the Cynergy3 Components logo are trademarks of Cynergy3 Components Limited.