

Features:

- General purpose resistor ideal for commercial/industrial applications
- Flame retardant coatings standard
- Flameproof version available as CFF
- Panasert available on selected sizes - contact factory
- Auto sequencing/insertion compatible
- CFM (mini) ideal choice when size constraints apply
- Cut and formed product is available on select sizes - contact factory
- Standard lead wire for CF / CFM is copper plated steel, with 100% tin over plate
- 100% tin plate on copper wire is available as type CFQ / CFQM
- RoHS compliant, lead free and halogen free



Electrical Specifications - CF

Type / Code	Power Rating (W) @ 70 °C	Maximum Working Voltage ⁽¹⁾	Maximum Overload Voltage	Dielectric Withstanding Voltage	Resistance Temperature Coefficient per Ohmic Range	Ohmic Range (Ω) and Tolerance	
						2%	5%
CF18	0.125	250	500	350	$< 10 \Omega = \pm 400 \text{ ppm}/^\circ\text{C}$ $10 \Omega \text{ to } 9.99 \text{ K } \Omega = 0 \sim -400 \text{ ppm}/^\circ\text{C}$ $10 \text{ K } \Omega \text{ to } 99 \text{ K } \Omega = 0 \sim -500 \text{ ppm}/^\circ\text{C}$ $100 \text{ K } \Omega \text{ to } 999 \text{ K } \Omega = 0 \sim -850 \text{ ppm}/^\circ\text{C}$ $1 \text{ M } \Omega \text{ and above} = 0 \sim -1500 \text{ ppm}/^\circ\text{C}$	10 - 1 M	1 - 22 M
CF14	0.25	350	600	350		1 - 1 M	1 - 22 M
CF12	0.5	350	700	600		10 - 1 M	1 - 22 M
CF1	1	500	1000	600		1 - 1 M	1 - 10 M
CF2	2	500	1000	600		1 - 1 M	1 - 10 M


(1) Lesser of $\sqrt{P \cdot R}$ or maximum working voltage.

Electrical Specifications - CFM

Type / Code	Power Rating (W) @ 70 °C	Maximum Working Voltage ⁽¹⁾	Maximum Overload Voltage	Dielectric Withstanding Voltage	Resistance Temperature Coefficient per Ohmic Range	Ohmic Range (Ω) and Tolerance	
						2%	5%
CFM14	0.25	250	500	350	$< 10 \Omega = \pm 400 \text{ ppm}/^\circ\text{C}$ $10 \Omega \text{ to } 9.99 \text{ K } \Omega = 0 \sim -400 \text{ ppm}/^\circ\text{C}$ $10 \text{ K } \Omega \text{ to } 99 \text{ K } \Omega = 0 \sim -500 \text{ ppm}/^\circ\text{C}$ $100 \text{ K } \Omega \text{ to } 999 \text{ K } \Omega = 0 \sim -850 \text{ ppm}/^\circ\text{C}$ $1 \text{ M } \Omega \text{ and above} = 0 \sim -1500 \text{ ppm}/^\circ\text{C}$	1 - 1 M	1 - 10 M
CFM12	0.5	350	600	350		1 - 1 M	1 - 10 M
CFM1	1	600	1000	600		1 - 1 M	1 - 10 M

(1) Lesser of $\sqrt{P \cdot R}$ or maximum working voltage.

Mechanical Specifications – CF / CFQ

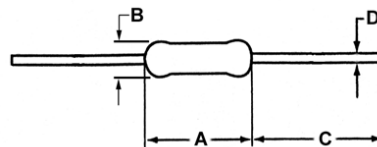

Type / Code	A Body Length	B Body Diameter	C Lead Length (Bulk)	D - Lead Diameter CF / CFM	D - Lead Diameter CFQ / CFQM	Unit
CF18 / CFQ18	0.130 ± 0.012	0.067 ± 0.012	1.102 ± 0.118	0.016 ± 0.003	0.018 ± 0.003	inches
	3.30 ± 0.30	1.70 ± 0.30	28.00 ± 3.00	0.40 ± 0.08	0.45 ± 0.08	mm
CF14 / CFQ14	0.236 ± 0.012	0.091 ± 0.012	1.102 ± 0.118	0.022 ± 0.003	0.022 ± 0.003	inches
	6.00 ± 0.30	2.30 ± 0.30	28.00 ± 3.00	0.55 ± 0.08	0.55 ± 0.08	mm
CF12 / CFQ12	0.335 ± 0.039	0.106 ± 0.020	1.102 ± 0.118	0.022 ± 0.003	0.028 ± 0.004	inches
	8.50 ± 1.00	2.70 ± 0.50	28.00 ± 3.00	0.55 ± 0.08	0.70 ± 0.10	mm
CF1 / CFQ1	0.433 ± 0.039	0.177 ± 0.020	1.181 ± 0.118	0.031 ± 0.004	0.031 ± 0.004	inches
	11.00 ± 1.00	4.50 ± 0.50	30.00 ± 3.00	0.80 ± 0.10	0.80 ± 0.10	mm
CF2 / CFQ2	0.591 ± 0.039	0.197 ± 0.020	1.339 ± 0.157	0.031 ± 0.004	0.031 ± 0.004	inches
	15.00 ± 1.00	5.00 ± 0.50	34.00 ± 4.00	0.80 ± 0.10	0.80 ± 0.10	mm

Mechanical Specifications – CFM / CFQM


Type / Code	A Body Length	B Body Diameter	C Lead Length (Bulk)	D - Lead Diameter CF / CFM	D - Lead Diameter CFQ / CFQM	Unit
CFM14 / CFQM14	0.130 ± 0.012 3.30 ± 0.30	0.067 ± 0.012 1.70 ± 0.30	1.102 ± 0.118 28.00 ± 3.00	0.016 ± 0.003 0.40 ± 0.08	0.018 ± 0.003 0.45 ± 0.08	inches mm
CFM12 / CFQM12	0.236 ± 0.012 6.00 ± 0.30	0.091 ± 0.012 2.30 ± 0.30	1.102 ± 0.118 28.00 ± 3.00	0.022 ± 0.003 0.55 ± 0.08	0.022 ± 0.003 0.55 ± 0.08	inches mm
CFM1 / CFQM1	0.354 ± 0.020 9.00 ± 0.50	0.138 ± 0.020 3.50 ± 0.50	1.102 ± 0.118 28.00 ± 3.00	0.028 ± 0.002 0.70 ± 0.05	0.028 ± 0.002 0.70 ± 0.05	inches mm

Performance Characteristics


Test	Test Method	Typical Result			Test Limit		
Current Noise	MIL-STD 202, Method 308	1 Ω ~ 91 K Ω	100 K Ω ~ 910 K Ω	1 M Ω ~ 22 M Ω	1 Ω ~ 91 K Ω	100 K Ω ~ 910 K Ω	1 M Ω ~ 22 M Ω
		0.15 μ V/V	0.32 μ V/V	0.54 μ V/V	0.2 μ V/V	0.4 μ V/V	0.6 μ V/V
Short Time Overload	JIS C5201-1, IEC60115-1, 4.13	< ± 0.25%			≤ ± (0.75% + 0.05 Ω)		
Resistance to Solder Heat	JIS C5201-1, IEC60115-1, 4.18	< ± 0.3%			≤ ± (0.50% + 0.05 Ω)		
Rapid Change of Temperature	JIS C5201-1, IEC60115-1, 4.19	< ± 0.3%			≤ ± (1.00% + 0.05 Ω)		
Endurance at 70 °C	JIS C5201-1, IEC60115-1, 4.25.1	< ± 1%			R < 100 K Ω: ≤ ± (2.0% + 0.05 Ω)		
Terminal Strength	MIL-STD 202, Method 211	< ± 0.2%			≤ ± (0.50% + 0.05 Ω)		
Damp Heat (Steady state)	JIS C5201-1, IEC60115-1, 4.24	< ± 1.5%			R < 100 K Ω: ≤ ± (3.0% + 0.05 Ω)		

Operating Temperature Range: -55 °C to +155 °C

Power Derating Curve:

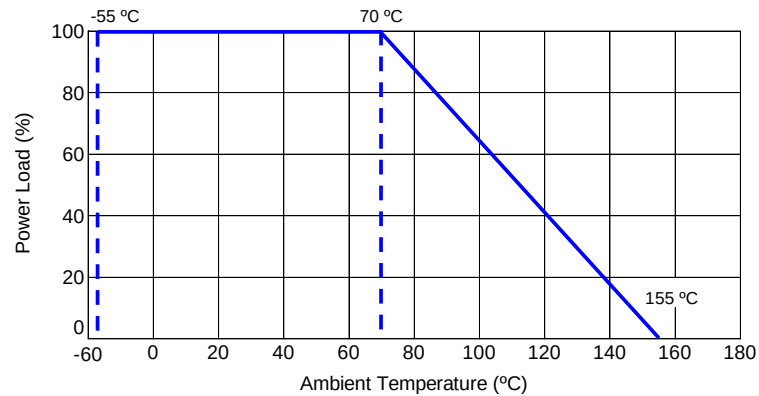

Single Pulse Power:

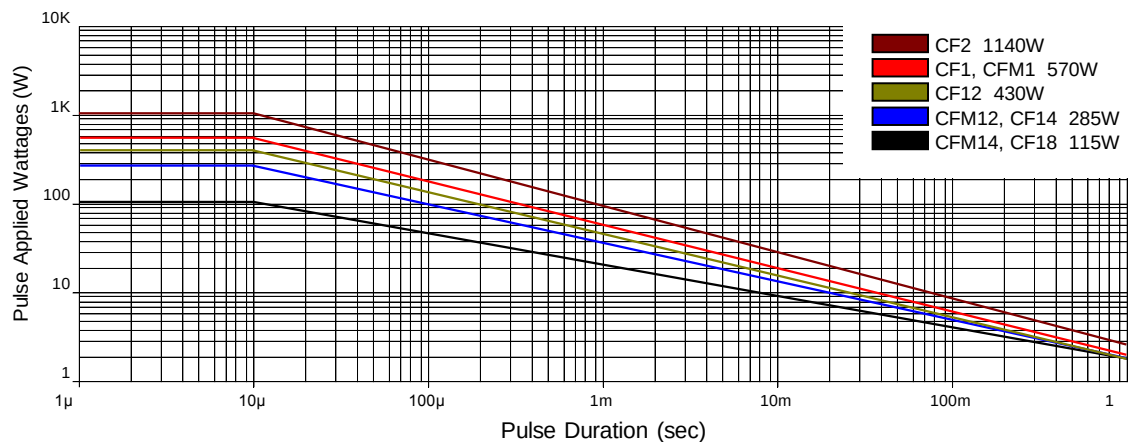

Typical performance for reference only.


Repetitive Pulse Data:

If repetitive pulses are applied to resistors, pulse wave form must be less than “Pulse limiting voltage”, “Pulse limiting current” or “Pulse limiting wattage” calculated by the formula below.

$$V_p = K \sqrt{P \times R \times T / t}$$

$$I_p = K \sqrt{P / R \times T / t}$$

$$P_p = K^2 \times P \times T / t$$

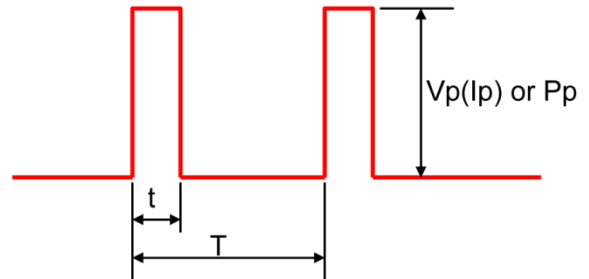

Where: V_p : Pulse limiting voltage (V)
 I_p : Pulse limiting current (A)
 P_p : Pulse limiting wattage (W)
 P : Power rating (W)
 R : Nominal resistance (ohm)
 T : Repetitive period (sec.)
 t : Pulse duration (sec.)
 K : Coefficient: 0.8
 $[V_r$: Rated Voltage (V), I_r : Rated Current (A)]

Note 1: If $T > 10 \rightarrow T = 10$ (sec.), $T / t > 1000 \rightarrow T / t = 1000$

Note 2: If $T > 10$ and $T / t > 1000$, “Pulse Limiting power (single pulse) is applied

Note 3: If $V_p < V_r$ ($I_p < I_r$ or $P_p < P$), V_r (I_r , P) is V_p (I_p , P_p)


Note 4: Pulse limiting voltage (Current, Wattage) is applied at less than rated ambient temperature. If ambient temperature is more than the rated temperature (70 °C), please decrease power rating according to “Power Derating Curve”

Note 5: Please assure sufficient margin for use period and conditions for “Pulse limiting voltage”


Note 6: If the pulse waveform is not square wave, please judge after transform the waveform into square wave according to the “Waveform Transformation to Square Wave”.

Waveform Transformation to Square Wave


1. Discharge curve wave with time constant “t” → Square wave

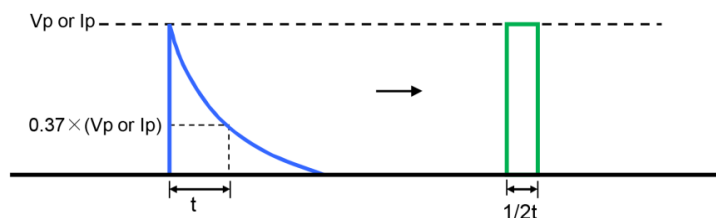


2. Damping oscillation wave with time constant of envelope " t " → Square wave

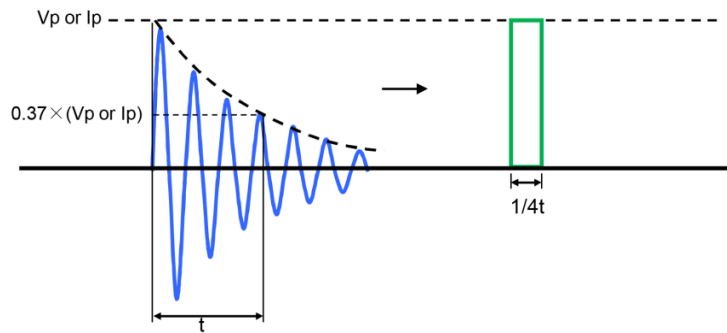


3. Half-wave rectification wave → Square wave

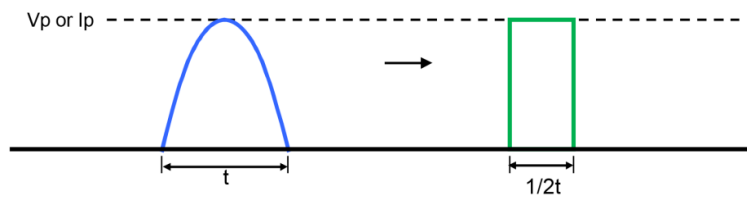


4. Triangular wave → Square wave

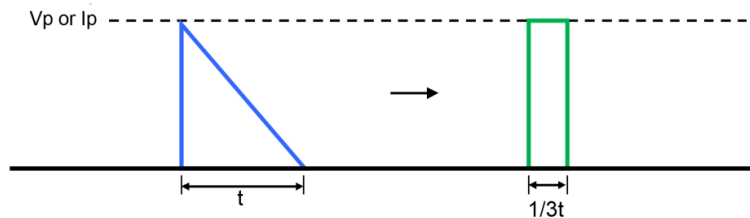


5. Special wave → Square wave

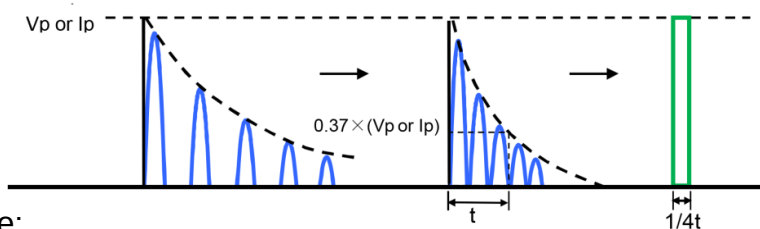

Current Noise:

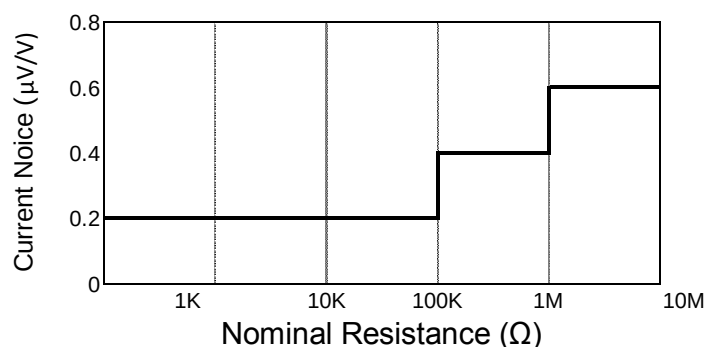

Packaging Specifications

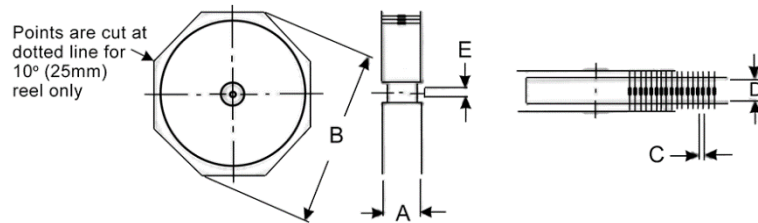


Type / Code	Class	Tape	A Max ⁽¹⁾	B Max	C	D ⁽²⁾	Unit
CF18 / CFQ18	I	0.250	2.508	13.504	0.197 ± 0.020	2.063 ± 0.079	inches
		6.35	63.70	343.00	5.00 ± 0.50	52.40 ± 2.00	mm
CF14 / CFQ14	I	0.250	2.638	13.504	0.197 ± 0.020	2.063 ± 0.079	inches
		6.35	67.00	343.00	5.00 ± 0.50	52.40 ± 2.00	mm
CF12 / CFQ12	I	0.250	2.736	13.504	0.197 ± 0.020	2.063 ± 0.079	inches
		6.35	69.50	343.00	5.00 ± 0.50	52.40 ± 2.00	mm
CF1 / CFQ1	I	0.250	2.972	13.504	0.197 ± 0.020	2.063 ± 0.079	inches
		6.35	75.50	343.00	5.00 ± 0.50	52.40 ± 2.00	mm
CF2 / CFQ2	I	0.250	3.130	13.504	0.394 ± 0.020	2.063 ± 0.079	inches
		6.35	79.50	343.00	10.00 ± 0.50	52.40 ± 2.00	mm
CFM14 / CFQM14	I	0.250	2.508	13.504	0.197 ± 0.020	2.063 ± 0.079	inches
		6.35	63.70	343.00	5.00 ± 0.50	52.40 ± 2.00	mm
CFM12 / CFQM12	I	0.250	2.638	13.504	0.197 ± 0.020	2.063 ± 0.079	inches
		6.35	67.00	343.00	5.00 ± 0.50	52.40 ± 2.00	mm
CFM1 / CFQM1	I	0.250	2.736	13.504	0.197 ± 0.020	2.063 ± 0.079	inches
		6.35	69.50	343.00	5.00 ± 0.50	52.40 ± 2.00	mm

Dimension "E": This is a non-critical dimension that does not have a tolerance in the standard.

Range of diameters is from 0.547 inches (13.90 mm) to 1.500 inches (38.10 mm).

- (1) Reference value only. The "A" dimension shall be governed by the overall length of the taped component. The distance between flanges shall be 0.059 inches (1.50 mm) to 0.315 (8.00 mm) greater than the overall component.
- (2) The given dimension "D" expresses the standard width spacing. A 26 mm narrow spacing is available as option "N" packaging code. Contact factory for more details.



Radial Lead Taping Specifications (Pana-Sert PCF14)

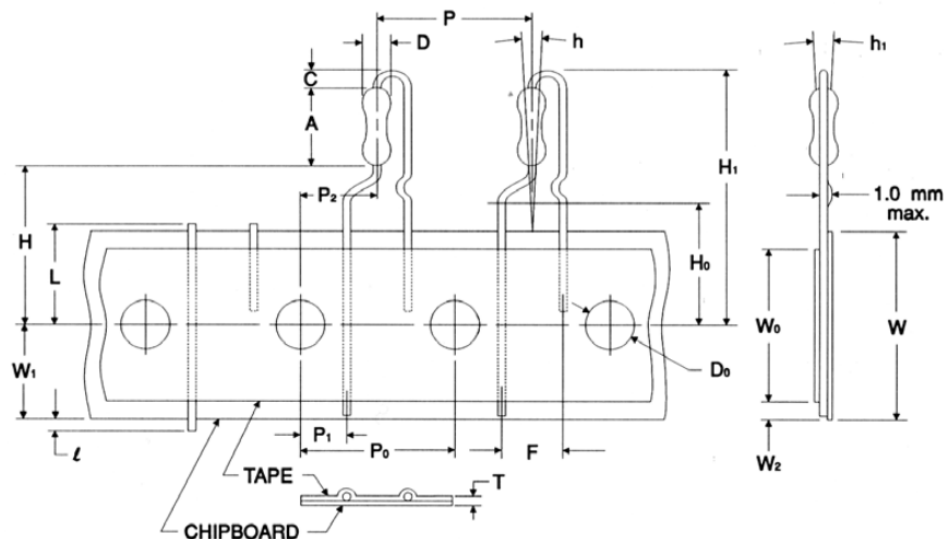


Symbol	Description	PANA-SERT	Unit	Symbol	Description	PANA-SERT	Unit
A	Resistor body length	0.256 ± 0.020 6.50 ± 0.50	inches mm	L	Cutout Length(1)	0.433 max. 11.00 max.	inches mm
C	Height of bending	0.098 ± 0.020 2.50 ± 0.50	inches mm	P	Resistor pitch(1)	0.500 ± 0.039 12.70 ± 1.00	inches mm
D	Resistor body diameter	0.091 ± 0.008 2.30 ± 0.20	inches mm	P ₀	Sprocket-hole pitch(1)	0.500 ± 0.012 12.70 ± 0.30	inches mm
D ₀	Sprocket-hole diameter	0.157 ± 0.012 4.00 ± 0.30	inches mm	P ₁	Sprocket-hole center to lead center	0.152 ± 0.028 3.85 ± 0.70	inches mm
F	Resistor lead spacing	0.197 ± 0.039 5.00 ± 1.00	inches mm	P ₂	Sprocket-hole center to resistor center(1)	0.250 ± 0.051 6.35 ± 1.30	inches mm
H	Height to bottom of resistor	0.748 ± 0.039 19.00 ± 1.00	inches mm	T	Thickness (chipboard and tape)	0.028 ± 0.008 0.70 ± 0.20	inches mm
H ₀	Height to lead clinch	0.630 ± 0.020 16.00 ± 0.50	inches mm	W	Chipboard width(1)	0.709 + 0.039 / -0.020 18.00 + 1.00 / -0.50	inches mm
H ₁	Height of resistor	1.122 max. 28.50 max.	inches mm	W ₀	Hold-down tape width	0.49 min. 12.50 min.	inches mm
h	Resistor alignment	0 ± 0.079 (0 ± 5°) 0 ± 2.00 (0 ± 5°)	inches mm	W ₁	Sprocket-hole position	0.354 + 0.030 / -0.020 9.00 + 0.75 / -0.50	inches mm
h ₁	Resistor alignment	0 ± 0.079 (0 ± 5°) 0 ± 2.00 (0 ± 5°)	inches mm	W ₂	Hold-down tape position	0.118 max. 3.00 max.	inches mm
I	Lead protrusion	0.079 max. 2.00 max.	inches mm				

Surface Temperature Rise

Measurement Point

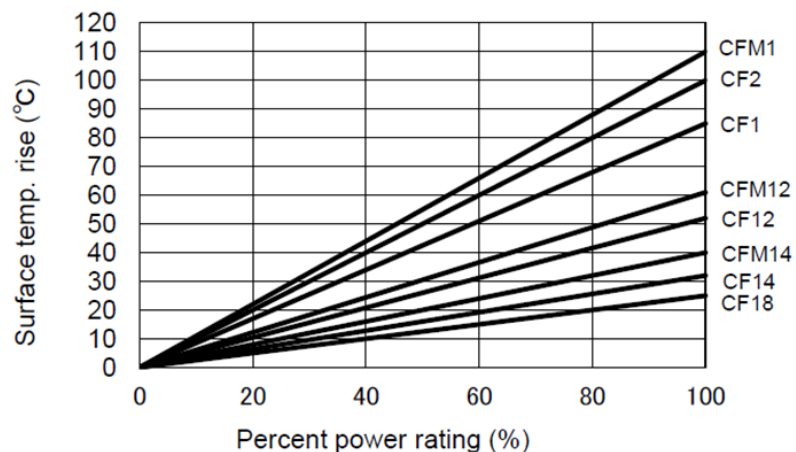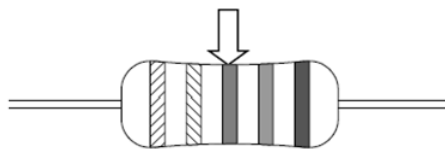

Standard Color Codes



PRECISION - Have three significant-figure bands, a multiplier band and a tolerance band. Tolerances 1% or less.

GENERAL PURPOSE - Have two significant-figure bands, a multiplier band and a tolerance band. Tolerances 2% or greater.

Color Band Description		
Band	Precision	General Purpose
1st Band	Nominal	Nominal
2nd Band	Nominal	Nominal
3rd Band	Nominal	Multiplier
4th Band	Multiplier	Tolerance
5th Band	Tolerance	-

	Nominal	Multiplier	Tolerance (%)
Black	0	1	-
Brown	1	10	1
Red	2	100	2
Orange	3	1 K	-
Yellow	4	10 K	-
Green	5	100 K	0.5
Blue	6	1000 K	0.25
Violet	7	-	0.1
Gray	8	-	-
White	9	0.001	-
Silver	-	0.01	10
Gold	-	0.1	5

RoHS Compliance

Stackpole Electronics has joined the worldwide effort to reduce the amount of lead in electronic components and to meet the various regulatory requirements now prevalent, such as the European Union's directive regarding "Restrictions on Hazardous Substances" (RoHS 3). As part of this ongoing program, we periodically update this document with the status regarding the availability of our compliant components. All our standard part numbers are compliant to EU Directive 2011/65/EU of the European Parliament as amended by Directive (EU) 2015/863/EU as regards the list of restricted substances.

RoHS Compliance Status						
Standard Product Series	Description	Package / Termination Type	Standard Series RoHS Compliant	Lead-Free Termination Composition	Lead-Free Mfg. Effective Date (Std Product Series)	Lead-Free Effective Date Code (YY/WW)
CF	Carbon Film Leaded Resistor	Axial	YES	100% Matte Sn	Jan-04 (Taiwan, China)	04/01
CFM	Mini-Carbon Film Leaded Resistor	Axial	YES	100% Matte Sn	Jan-04 (Taiwan, China)	04/01

"Conflict Metals" Commitment

We at Stackpole Electronics, Inc. are joined with our industry in opposing the use of metals mined in the "conflict region" of the eastern Democratic Republic of the Congo (DRC) in our products. Recognizing that the supply chain for metals used in the electronics industry is very complex, we work closely with our own suppliers to verify to the extent possible that the materials and products we supply do not contain metals sourced from this conflict region. As such, we are in compliance with the requirements of Dodd-Frank Act regarding Conflict Minerals.

Compliance to "REACH"

We certify that all passive components supplied by Stackpole Electronics, Inc. are SVHC (Substances of Very High Concern) free and compliant with the requirements of EU Directive 1907/2006/EC, "The Registration, Evaluation, Authorization and Restriction of Chemicals", otherwise referred to as REACH. Contact us for complete list of REACH Substance Candidate List.

Environmental Policy

It is the policy of Stackpole Electronics, Inc. (SEI) to protect the environment in all localities in which we operate. We continually strive to improve our effect on the environment. We observe all applicable laws and regulations regarding the protection of our environment and all requests related to the environment to which we have agreed. We are committed to the prevention of all forms of pollution.

How to Order

1	2	3	4	5	6	7	8	9	10																																																																														
C	F	1	2	J	T	1	0	0	K																																																																														
<table><tr><th colspan="2">Product Series</th></tr><tr><td>Code</td><td>Description</td></tr><tr><td>CF</td><td>Standard</td></tr><tr><td>CFF</td><td>Flameproof</td></tr><tr><td>CFM</td><td>Mini</td></tr><tr><td>PCF</td><td>Panasert CF14</td></tr><tr><td>PCFM</td><td>Panasert CF12</td></tr><tr><td>CFQ</td><td>Tin plating on copper wire</td></tr><tr><td>CFQM</td><td>Tin plating (mini)</td></tr><tr><td>PCFQ</td><td>Tin plating on copper wire Panasert</td></tr></table>		Product Series		Code	Description	CF	Standard	CFF	Flameproof	CFM	Mini	PCF	Panasert CF14	PCFM	Panasert CF12	CFQ	Tin plating on copper wire	CFQM	Tin plating (mini)	PCFQ	Tin plating on copper wire Panasert	<table><tr><th colspan="2">Power Rating</th></tr><tr><td>Code</td><td>Power</td></tr><tr><td>18</td><td>0.125 W</td></tr><tr><td>14</td><td>0.25 W</td></tr><tr><td>12</td><td>0.5 W</td></tr><tr><td>1</td><td>1 W</td></tr><tr><td>2</td><td>2 W</td></tr></table>		Power Rating		Code	Power	18	0.125 W	14	0.25 W	12	0.5 W	1	1 W	2	2 W	<table><tr><th colspan="2">Tolerance</th></tr><tr><td>Code</td><td>Tol</td></tr><tr><td>G</td><td>2%</td></tr><tr><td>J</td><td>5%</td></tr></table>		Tolerance		Code	Tol	G	2%	J	5%	<table><tr><th colspan="4">Packaging</th></tr><tr><td>Code</td><td>Description</td><td>Product Code</td><td>Quantity</td></tr><tr><td rowspan="4">T</td><td rowspan="4">Tape and Reel</td><td>CF18, CFQ18, CFM14, CFQM14, CF14, CFQ14, CFM12, CFQM12, CF12, CFQ12, PCF14, PCFM12</td><td>5000</td></tr><tr><td>CFM1/CFQM1</td><td>2500</td></tr><tr><td>CF1/CFQ1</td><td>2000</td></tr><tr><td>CF2/CFQ2</td><td>1000</td></tr><tr><td rowspan="3">A</td><td rowspan="3">Ammo</td><td>CF18, CFQ18, CFM14, CFQM14, CF14, CFQ14, CFM12, CFQM12</td><td>5000</td></tr><tr><td>CF12, CFQ12, CFM1, CFQM1, PCF14, PCFM12, CF1, CFQ1</td><td>2000</td></tr><tr><td>CF2</td><td>1000</td></tr><tr><td>B</td><td>Bulk</td><td>All Sizes</td><td>1000</td></tr></table>			Packaging				Code	Description	Product Code	Quantity	T	Tape and Reel	CF18, CFQ18, CFM14, CFQM14, CF14, CFQ14, CFM12, CFQM12, CF12, CFQ12, PCF14, PCFM12	5000	CFM1/CFQM1	2500	CF1/CFQ1	2000	CF2/CFQ2	1000	A	Ammo	CF18, CFQ18, CFM14, CFQM14, CF14, CFQ14, CFM12, CFQM12	5000	CF12, CFQ12, CFM1, CFQM1, PCF14, PCFM12, CF1, CFQ1	2000	CF2	1000	B	Bulk	All Sizes	1000	<table><tr><th>Resistance Value</th></tr><tr><td>Four characters with the multiplier used as the decimal holder.</td></tr><tr><td>10 ohm = 10R0</td></tr><tr><td>10.2 Kohm = 10K2</td></tr><tr><td>1 Mohm = 1M00</td></tr></table>		Resistance Value	Four characters with the multiplier used as the decimal holder.	10 ohm = 10R0	10.2 Kohm = 10K2	1 Mohm = 1M00
Product Series																																																																																							
Code	Description																																																																																						
CF	Standard																																																																																						
CFF	Flameproof																																																																																						
CFM	Mini																																																																																						
PCF	Panasert CF14																																																																																						
PCFM	Panasert CF12																																																																																						
CFQ	Tin plating on copper wire																																																																																						
CFQM	Tin plating (mini)																																																																																						
PCFQ	Tin plating on copper wire Panasert																																																																																						
Power Rating																																																																																							
Code	Power																																																																																						
18	0.125 W																																																																																						
14	0.25 W																																																																																						
12	0.5 W																																																																																						
1	1 W																																																																																						
2	2 W																																																																																						
Tolerance																																																																																							
Code	Tol																																																																																						
G	2%																																																																																						
J	5%																																																																																						
Packaging																																																																																							
Code	Description	Product Code	Quantity																																																																																				
T	Tape and Reel	CF18, CFQ18, CFM14, CFQM14, CF14, CFQ14, CFM12, CFQM12, CF12, CFQ12, PCF14, PCFM12	5000																																																																																				
		CFM1/CFQM1	2500																																																																																				
		CF1/CFQ1	2000																																																																																				
		CF2/CFQ2	1000																																																																																				
A	Ammo	CF18, CFQ18, CFM14, CFQM14, CF14, CFQ14, CFM12, CFQM12	5000																																																																																				
		CF12, CFQ12, CFM1, CFQM1, PCF14, PCFM12, CF1, CFQ1	2000																																																																																				
		CF2	1000																																																																																				
B	Bulk	All Sizes	1000																																																																																				
Resistance Value																																																																																							
Four characters with the multiplier used as the decimal holder.																																																																																							
10 ohm = 10R0																																																																																							
10.2 Kohm = 10K2																																																																																							
1 Mohm = 1M00																																																																																							