

SPECIFICATION

Part No.	:	G20.B.305111.wmc
Product Name	:	Hercules Covert Wall and Cabinet Mounted Cellular Antenna
Features	:	GSM / CDMA /DCS /PCS / WCDMA / UMTS / HSDPA 850/900/1700/1800/1900/2100 MHz High Efficiency - Omni-directional Pattern Covert and Vandal Resistant IP67 and IP69K Waterproof Standard is 3M Cable NFC200 SMA(M)-Customizable ROHS Compliant

Photo:



1. Introduction

The Wall Mount G20 Hercules Gen II is a high performance covert wall mounted cellular antenna for 2G and 3G applications. This antenna can easily fix to a wall or metal surface. The Wall Mount G20 antenna has omnidirectional radiation patterns across all bands ensuring constant reception and transmission.

Applications

- Smart City Outdoors Utility and Traffic Management

 - On Building Wall

 - On Street Metal Cabinet

PC housing is resistant to vandalism and direct attack. The Hercules and the connection internally to the bracket is completely IP67 waterproof. The bracket allows complete concealment of the cable for a more secure integration and cleaner installation. The cable can also be routed out of the back wall of the bracket into the interior of the mounting wall for added security against vandalism. The standard version comes with 3 meters extremely low loss NFC200 (0.3dB against 0.7dB per meter for RG58) to allow for flexibility of placement. The cable and connector can be completely customized.

2. Specification

ELECTRICAL					
Standard	GSM	GSM	DCS	PCS	UMTS/ HSPA
Band (MHz)	850	900	1800	1900	2100
Frequency (MHz)	824~894	880~960	1710~1880	1850~1990	1920~2170
Efficiency (%)					
30 cm cable length	45.64	70.44	75.09	63.10	54.48
1 meter cable length	43.59	67.27	68.48	57.80	50.15
2 meters cable length	40.32	61.35	61.56	51.51	44.54
3 meters cable length	37.33	56.84	54.40	45.24	38.97
5 meters cable length	32.05	53.61	50.65	40.64	33.64
Average Gain(dBi)					
30 cm cable length	-3.68	-1.53	-1.27	-2.04	-2.76
1 meter cable length	-3.88	-1.73	-1.67	-2.41	-3.12
2 meters cable length	-4.21	-2.13	-2.14	-2.91	-3.64
3 meters cable length	-4.54	-2.47	-2.67	-3.48	-4.22
5 meters cable length	-5.28	-3.23	-3.75	-4.60	-5.33
Peak Gain(dBi)					
30 cm cable length	2.07	3.21	4.21	3.48	2.81
1 meter cable length	1.87	3.01	3.81	3.10	2.45
2 meters cable length	1.54	2.61	3.34	2.60	1.93
3 meters cable length	1.21	2.28	2.81	2.04	1.35
5 meters cable length	0.47	1.51	1.73	0.92	0.24
Impedance		50Ω			
Polarization		Linear			
Radiation Pattern		Omni			
Input Power		5 W			
MECHANICAL					
Antenna Dimensions		Height = 29 mm and Diameter = 49 mm			
Bracket Dimensions		Height = 92.4 mm and Length = 128.7 mm			
Antenna Cable Length		3M NFC200 – Fully Customizable			
Connector		SMA-Male – Fully Customizable			
Antenna Casing		PC			
Bracket Casing		Plastic: PC+ABS, Metal: Aluminum			
Base and Thread		Nickel plated steel			
Thread Diameter		18 mm			
Weather proof gasket		CR4305 foam with 3M9448B double-sided adhesive			
Sealant		Rubber Stopper			
Weight		340g			
ENVIRONMENTAL					
Protection		IP67 and IP69K			
Corrosion		5% NaCl for 48hrs - Nickel plated steel base and thread			
Temperature Range		-40°C to +85°C			
Thermal Shock		100 cycles -40°C to +85°C			
Humidity		Non-condensing 65°C 95% RH			
Shock (Drop Test)		1m drop on concrete 6 axes			

3. Antenna Characteristics

3.1 Testing setup



Figure.1 Test setup with bracket

3.2 Return loss

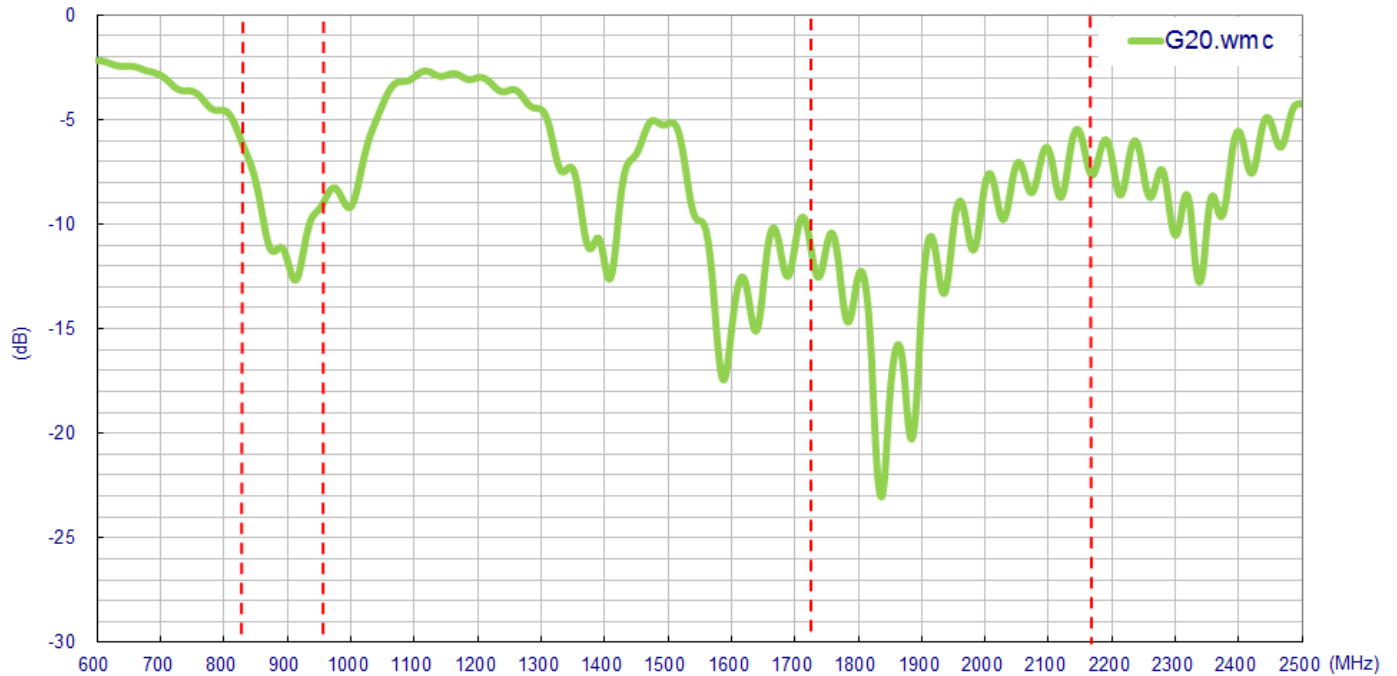


Figure2. Return loss of G20.B.305111.wmc with 3 meters cable length

3.3 Efficiency

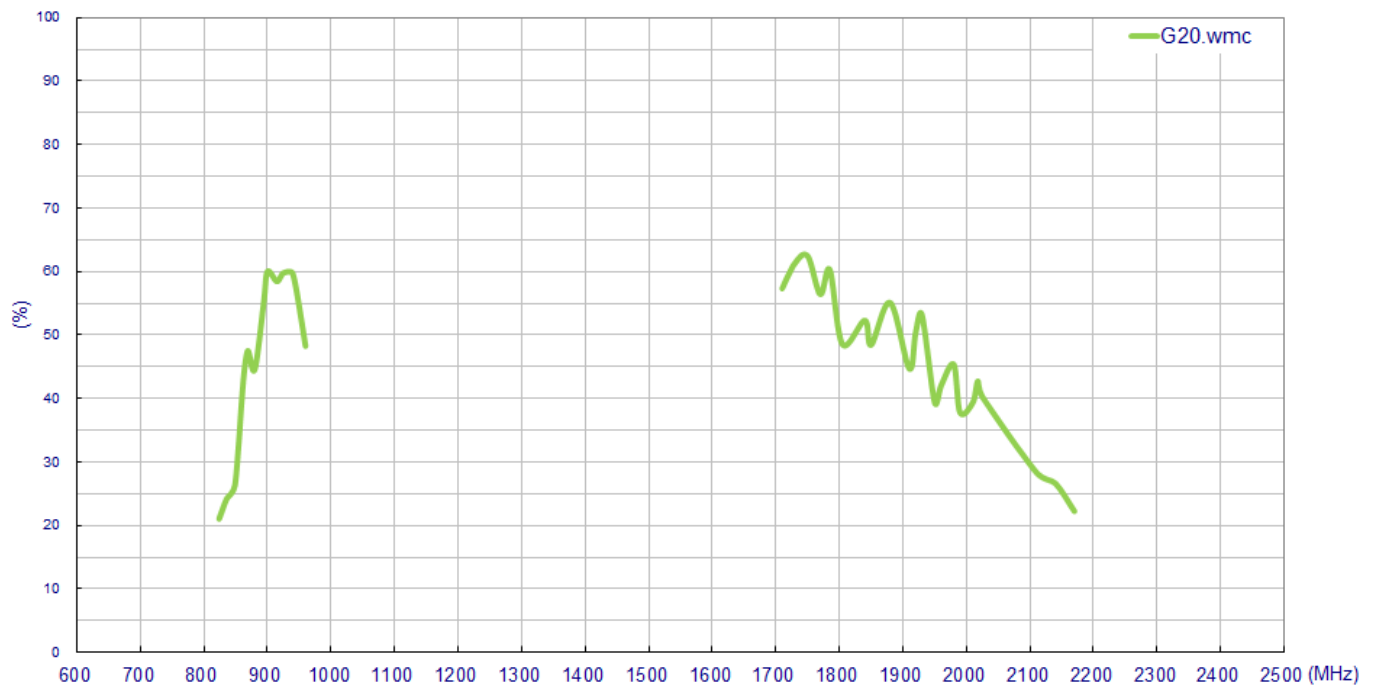


Figure3. Efficiency of G20.B.305111.wmc with 3 meters cable length

3.4 Peak gain

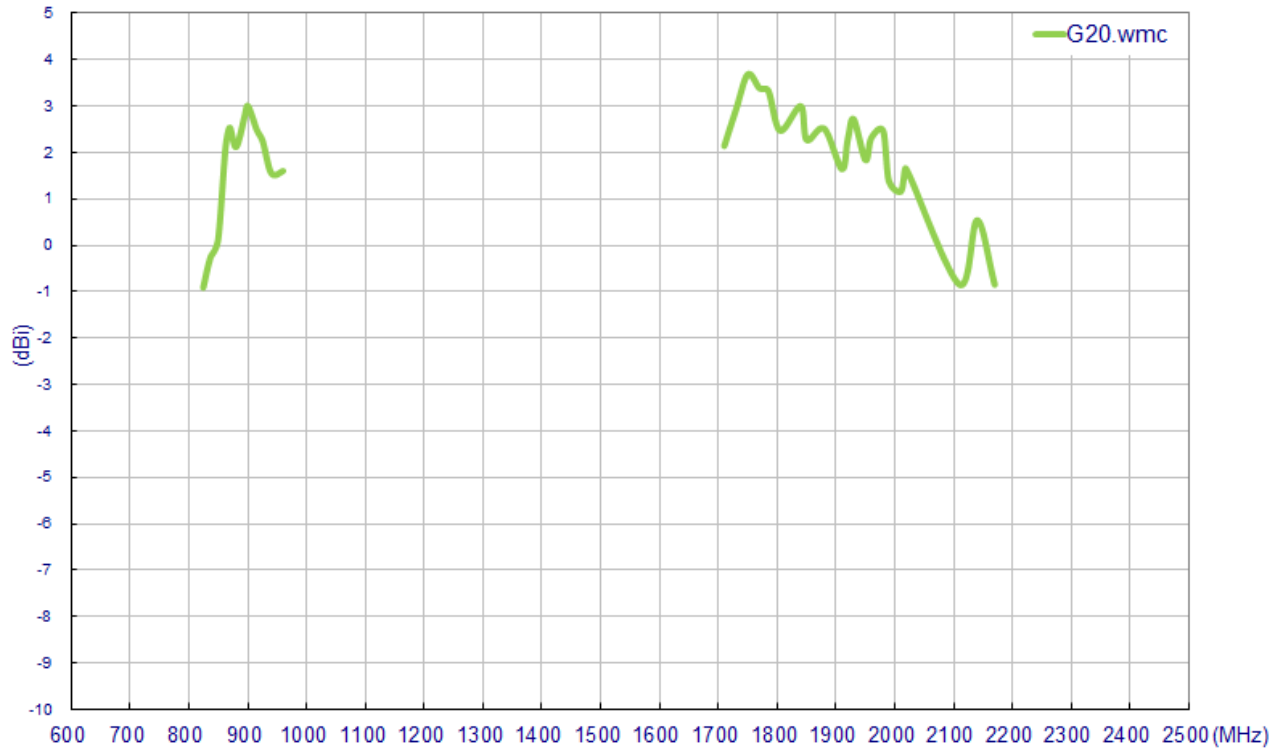


Figure4. Peak gain of G20.B.305111.wmc with 3 meters cable length

3.5 Average gain

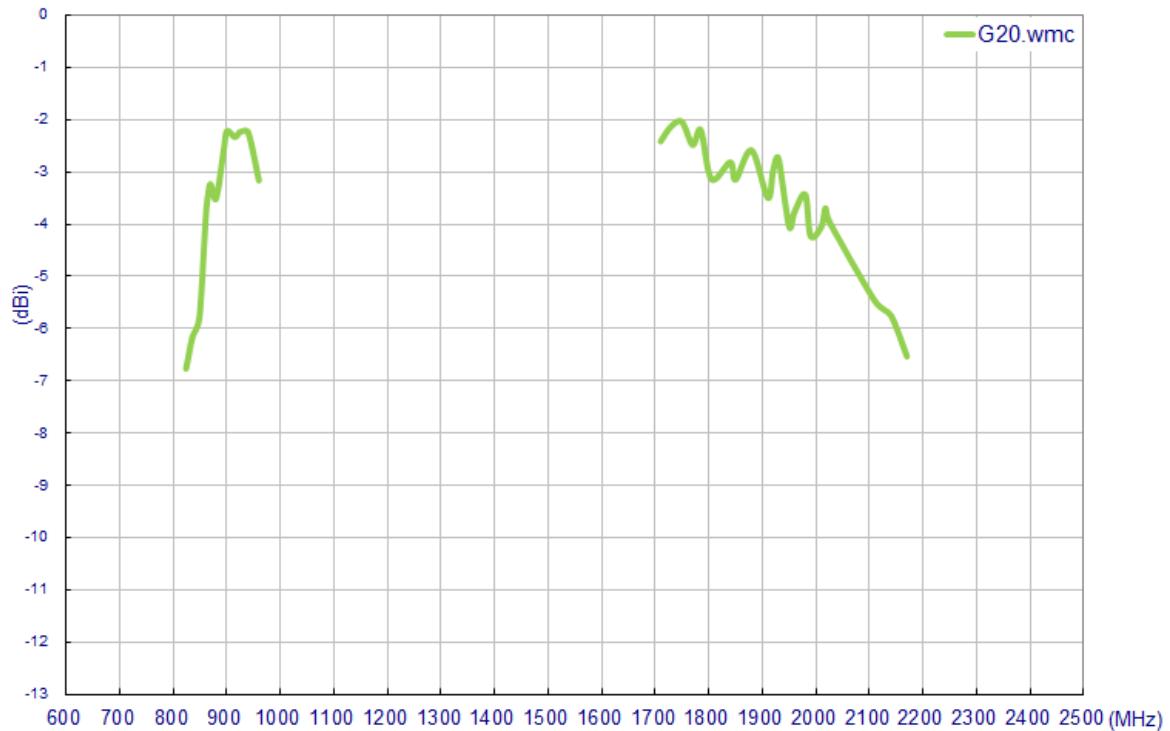


Figure5. Average gain of G20.B.305111.wmc with 3 meters cable length

4. Antenna Radiation Patterns

4.1 Testing setup

The antenna radiation patterns were measured in ETS Anechoic Chamber. The measurement setup as below,


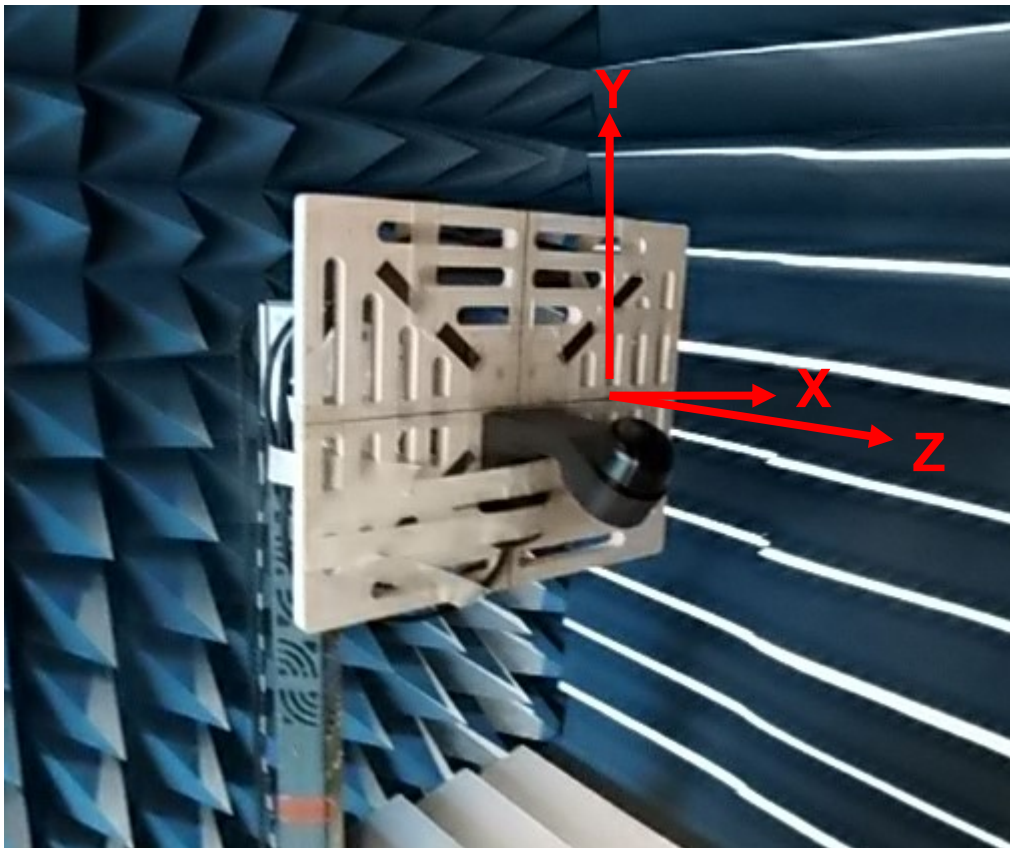



Figure.6 Testing Setup in ETS Anechoic Chamber

4.2 Antenna radiation patterns (Antenna with L-bracket and 3 meters cable length)


X-Y plane (824MHz~960MHz)

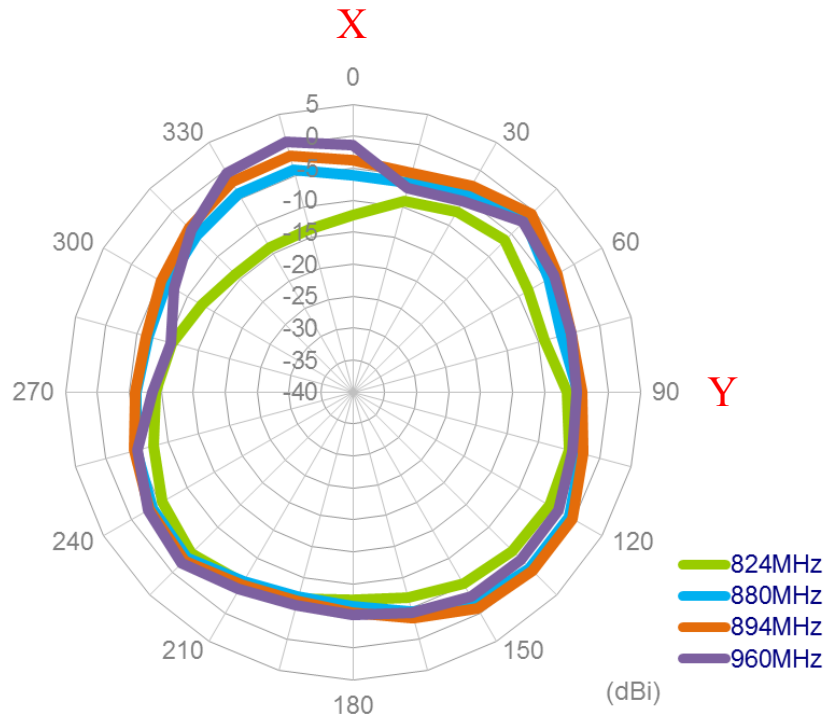


X-Y plane (1710MHz~2170MHz)

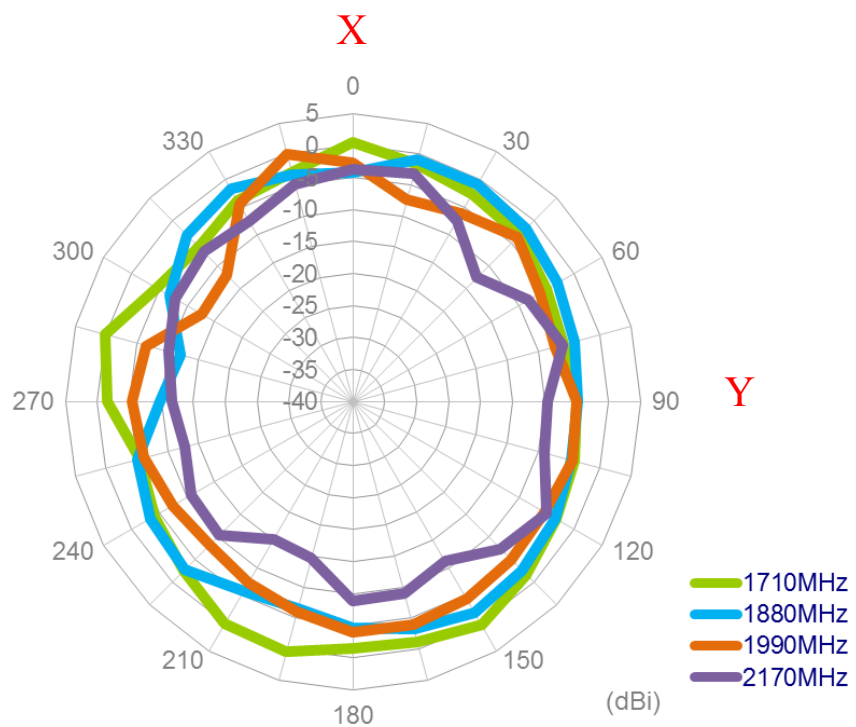


X-Z plane (824MHz~960MHz)

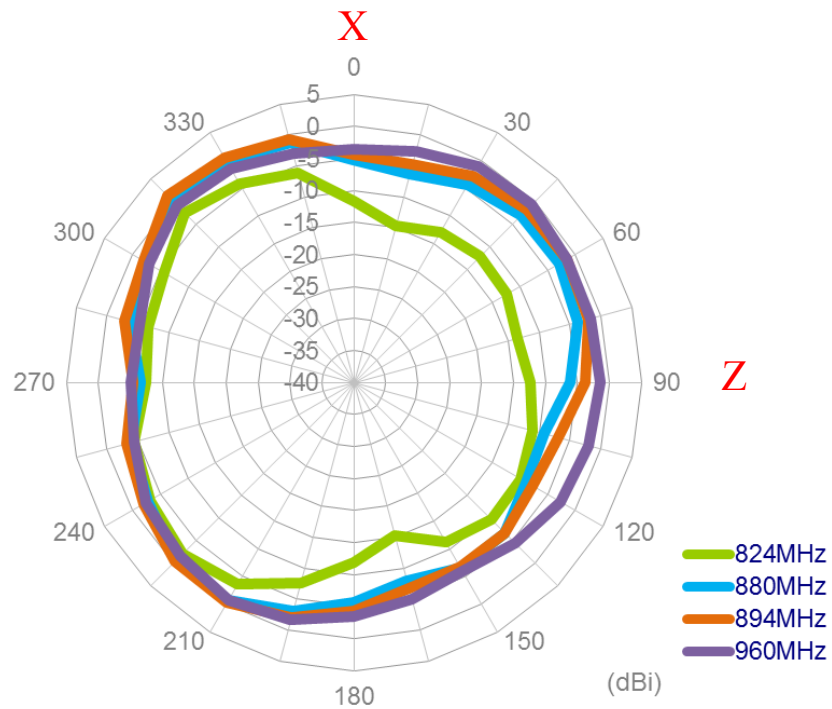


X-Z plane (1710MHz~2170MHz)

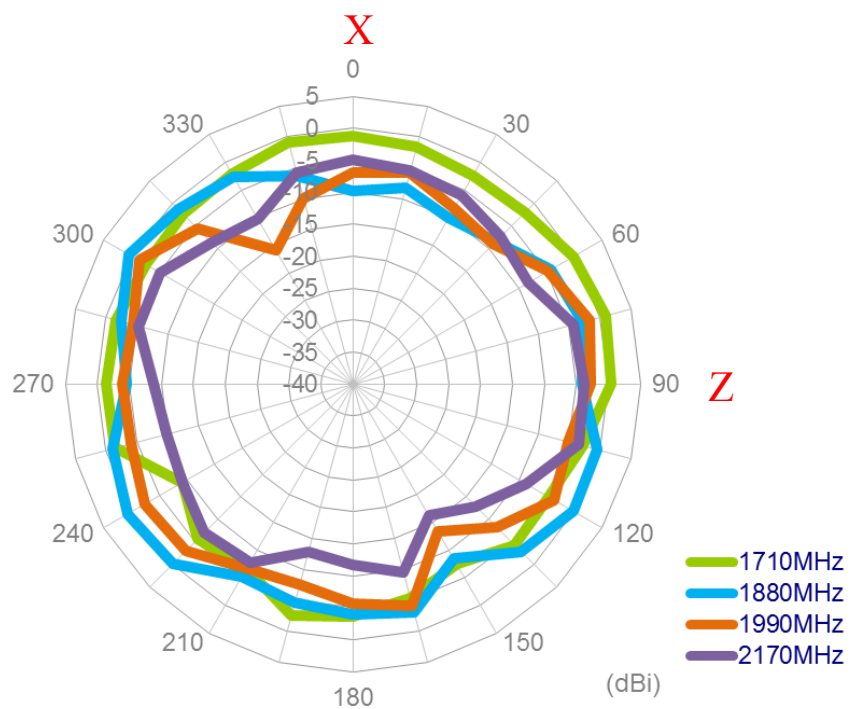


Y-Z plane (824MHz~960MHz)

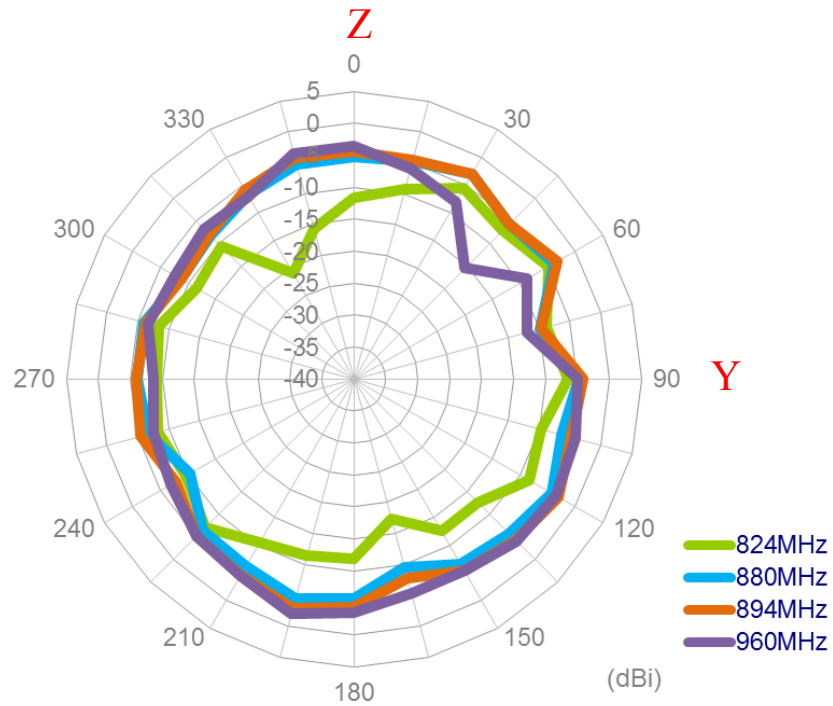


Y-Z plane (1710MHz~2170MHz)

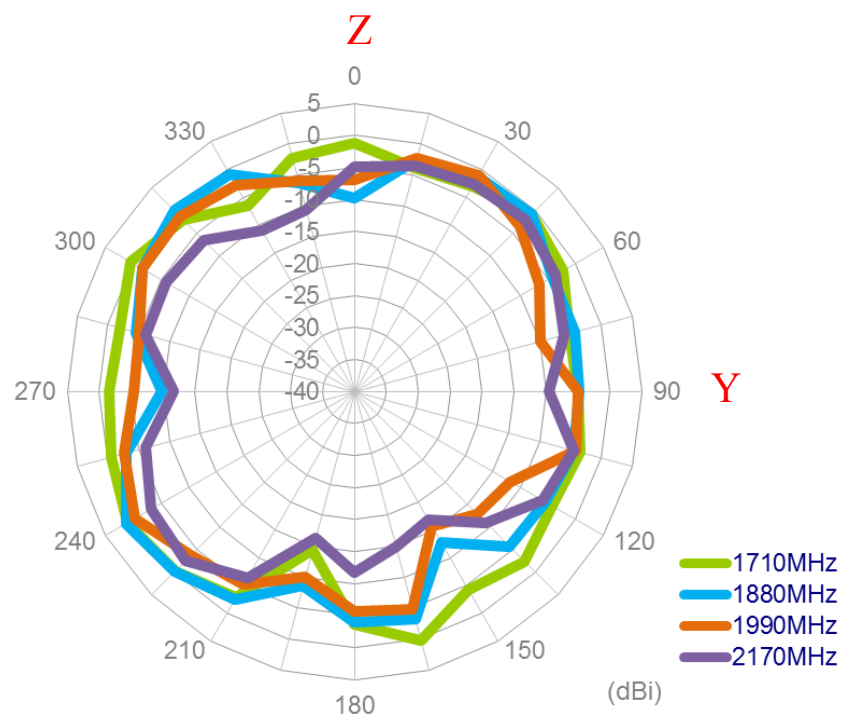

5. DRAWING

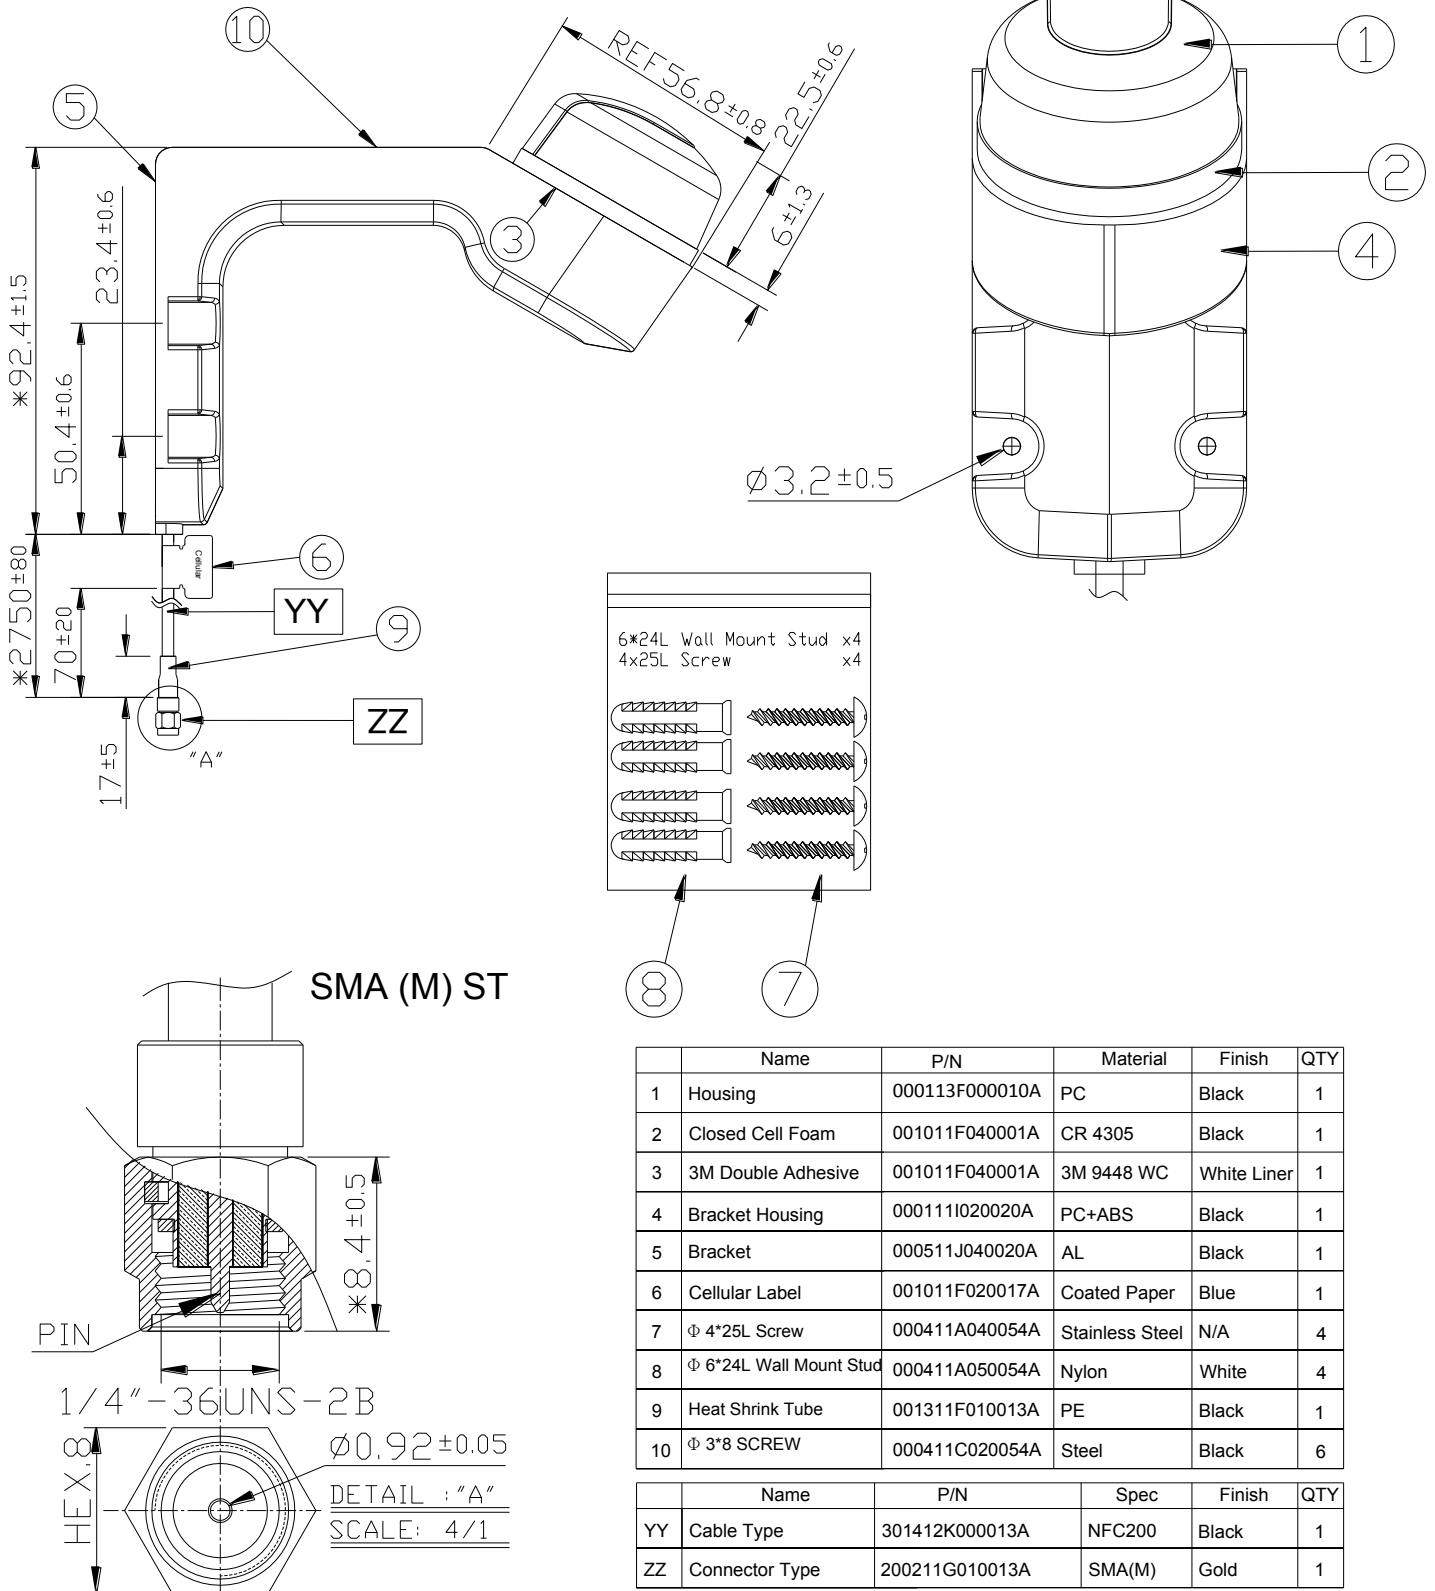

6. Packaging

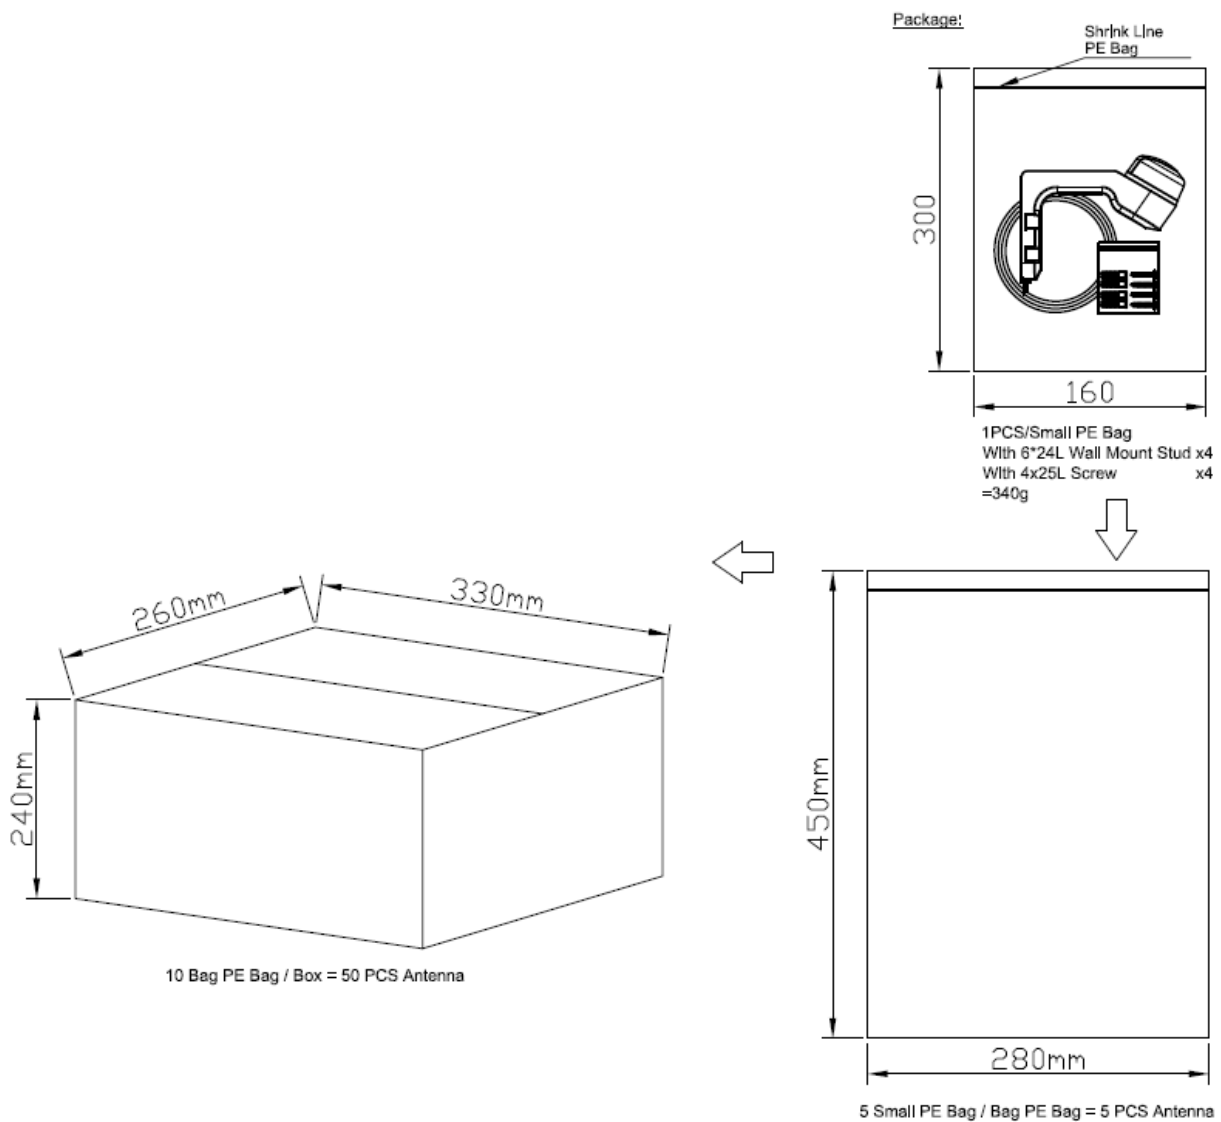

7. Application Note

The G20.B.305111.wmc antenna measurement with different cable length, the performance is shown as below:

7.1 Return loss

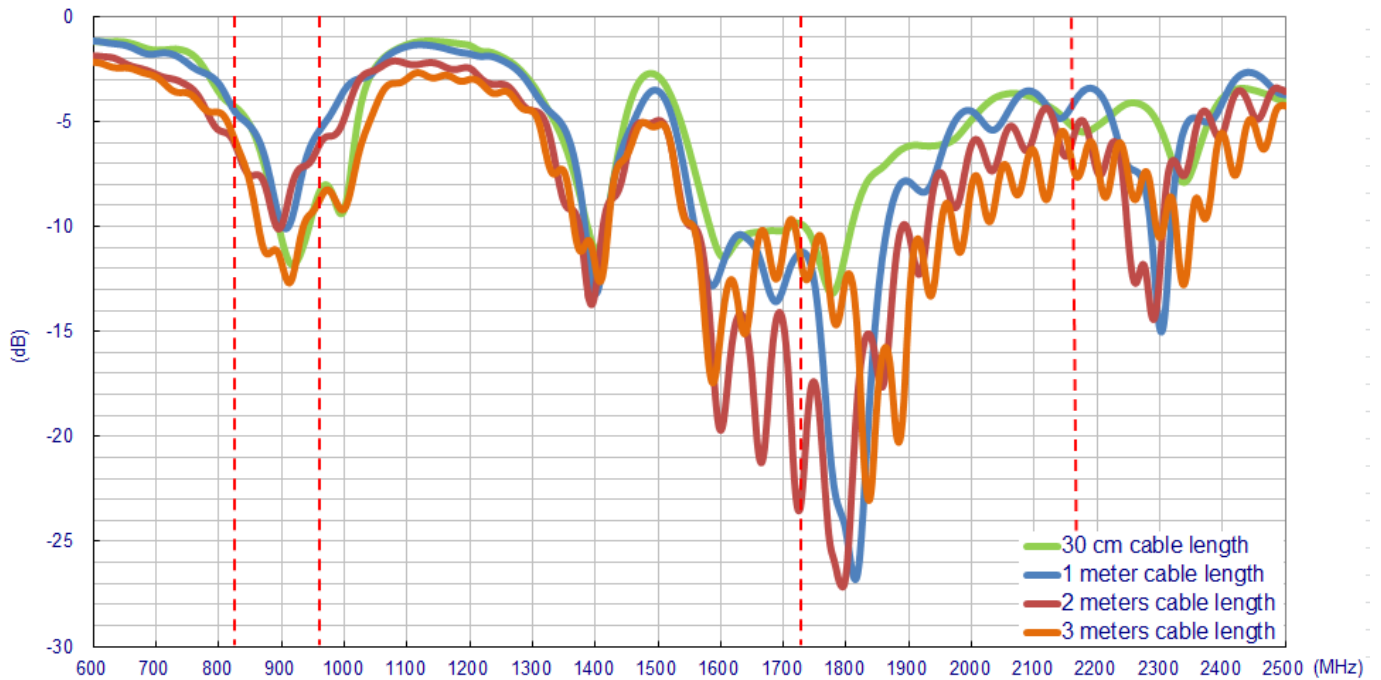


Figure 7. Measured the return loss of G20.B.305111.wmc Antenna with different cable length

7.2 Efficiency

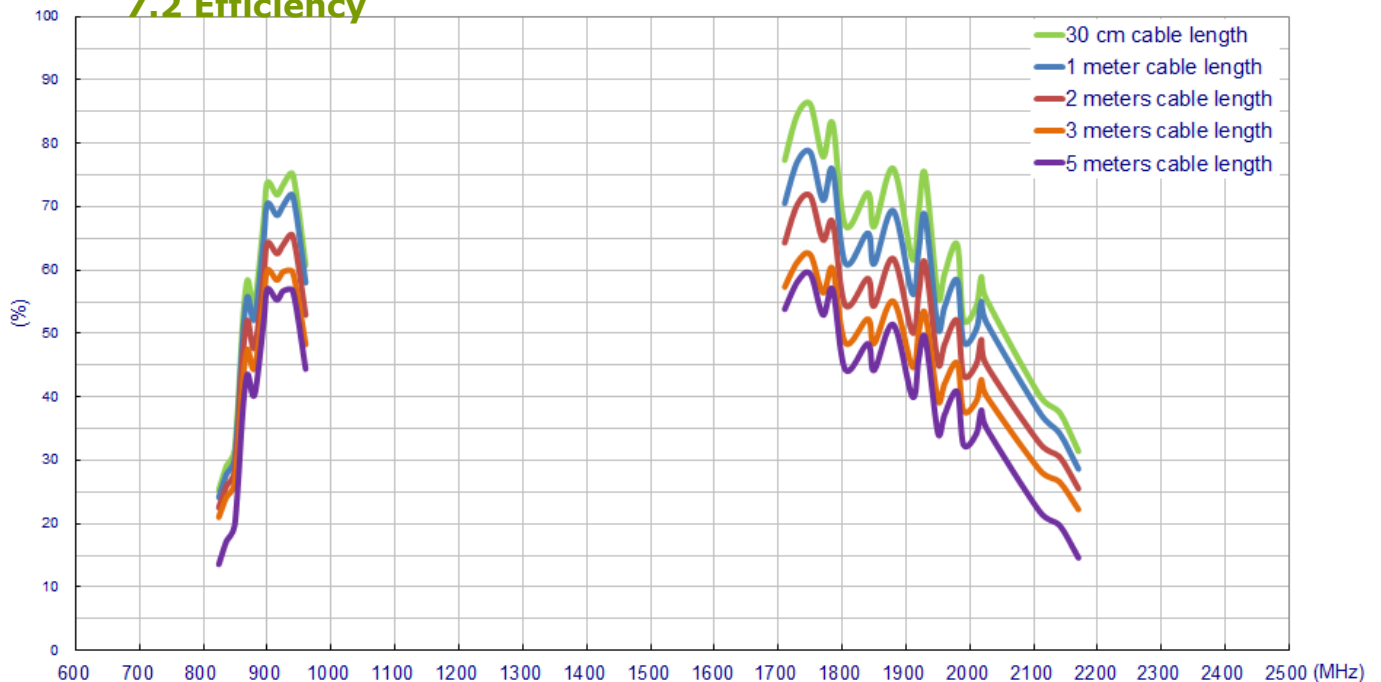


Figure 8. Measured the efficiency of G20.B.305111.wmc Antenna with different cable length

7.3 Average Gain

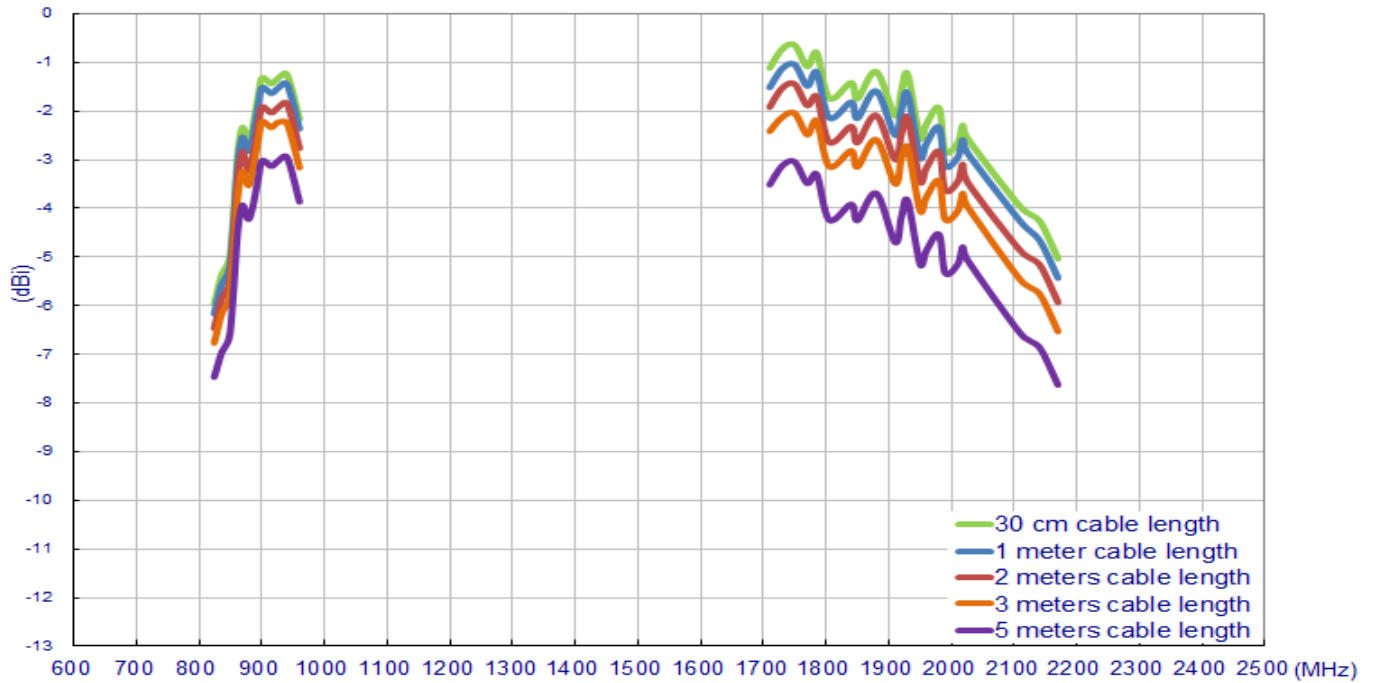


Figure 9. Measured the Average Gain of G20.B.305111.wmc Antenna with different cable length

7.4 Peak Gain

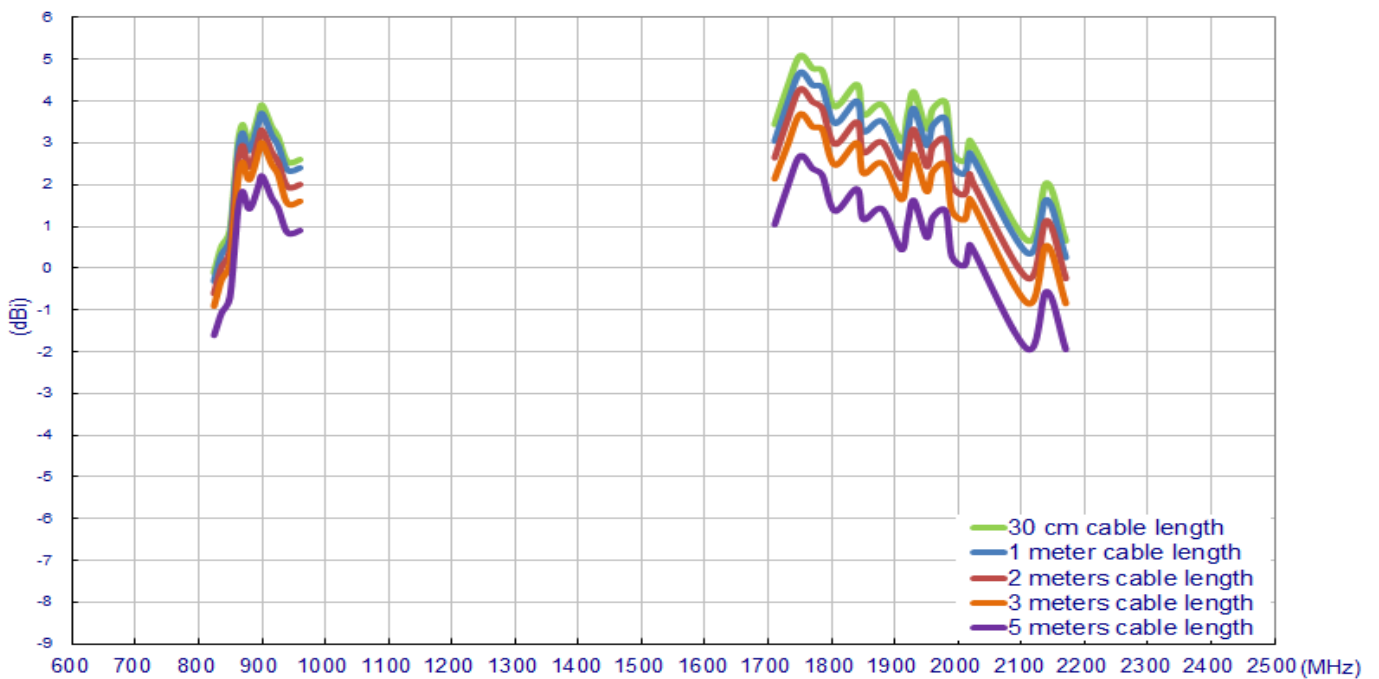


Figure 10. Measured the Peak Gain of G20.B.305111.wmc Antenna with different cable length

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.