


Panasonic
ideas for life

High speed switching.
(Turn on time: 0.1ms,
Turn off time: 0.03ms).

RF PhotoMOS
(AQV22O)

FEATURES

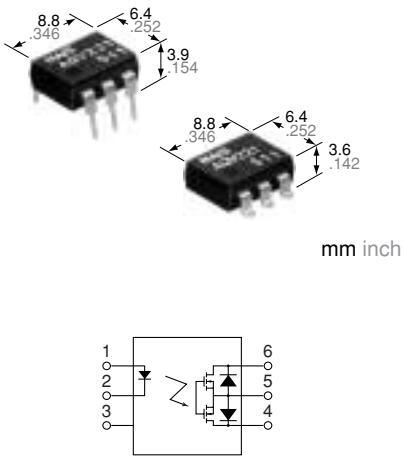

1. High frequency characteristics with low capacitance between output terminals

Low capacitance: Typ. 5 pF (between output terminals)
Isolation loss: 40 dB or more (at 1 MHz)

2. High sensitivity, high speed response

Controls load current of 0.12 A (max.), with input current of 5 mA.
Operate time is 100 µs (Typical)

3. Low-level off state leakage current

PhotoMOS AQV22O types exhibit an OFF state leakage current in the order of 100 picoamperes at a load voltage of 80 V compared with several milliamperes in solid-state relay.

4. Controls low-level analog signals

PhotoMOS relay features extremely low closed-circuit offset voltages to enable control of small analog signals without distortion.

5. Low terminal electromotive force (Approx. 1 mV)

6. Small LED voltage drop on input side (Max. 1.5 V)

TYPICAL APPLICATIONS

- Measuring devices
Scanner, IC checker, Board tester
- Audio visual equipment
CD, VCR

TYPES

Type	Output rating*		Part No.				Packing quantity	
	Load voltage	Load current	Through hole terminal	Surface-mount terminal				
				Tube packing style		Tape and reel packing style		
AC/DC type	40 V	80 mA	AQV221	AQV221A	AQV221AX	AQV221AZ	1 tube contains 50 pcs. 1 batch contains 500 pcs.	
	80 V	50 mA	AQV225	AQV225A	AQV225AX	AQV225AZ		

*Indicate the peak AC and DC values.

Note: For space reasons, the SMD terminal shape indicator "A" and the package type indicator "X" and "Z" are omitted from the seal.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


Item		Symbol	Type of connection	AQV221(A)	AQV225(A)	Remarks	
Input	LED forward current	I _F	A	50 mA			
	LED reverse voltage	V _R		5 V			
	Peak forward current	I _{FP}		1 A		f = 100 Hz, Duty factor = 0.1%	
	Power dissipation	P _{in}		75 mW			
Output	Load voltage (Peak AC)	V _L	A	40 V	80 V		
	Continuous load current	I _L		0.08 A	0.05 A	A connection: Peak AC, DC B, C connection: DC	
				0.09 A	0.06 A		
				0.12 A	0.075 A		
	Peak load current	I _{peak}	B	0.18 A	0.15 A	A connection: 100 ms (1 shot), V _L = DC	
	Power dissipation	P _{out}		230 mW			
Total power dissipation		P _T		280 mW			
I/O isolation voltage		V _{iso}		1,500 V AC			
Temperature limits	Operating	T _{opr}		-40°C to +85°C -40°F to +185°F		Non-condensing at low temperatures	
	Storage	T _{stg}		-40°C to +100°C -40°F to +212°F			

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	Type of connection	AQV221(A)	AQV225(A)	Remarks
Input	LED operate current		Typical	I _{fon}	0.9 mA		I _L = Max.
			Maximum		3 mA		
	LED turn off current		Minimum	I _{loff}	0.4 mA		I _L = Max.
			Typical		0.85 mA		
Output	LED dropout voltage		Typical	V _F	1.25 V (1.14 V at I _F = 5 mA)		I _F = 50 mA
			Maximum		1.5 V		
	On resistance		Typical	R _{on}	22 Ω	36 Ω	I _F = 5 mA
			Maximum		35 Ω	50 Ω	I _L = Max. Within 1 s on time
Output			Typical	R _{on}	13 Ω	21 Ω	I _F = 5 mA
			Maximum		18 Ω	25 Ω	I _L = Max. Within 1 s on time
	Typical		R _{on}	6.5 Ω	10.5 Ω		I _F = 5 mA
	Maximum			9 Ω	12.5 Ω		I _L = Max. Within 1 s on time
Transfer characteristics	Output capacitance		Typical	C _{out}	5.6 pF	4.8 pF	I _F = 0 mA
			Maximum		8 pF		V _B = 0 V f = 1 MHz
	Off state leakage current		Typical	I _{Leak}	30 pA		I _F = 0 mA
			Maximum		10 nA		V _L = Max.
Transfer characteristics	Switching speed	Turn on time*	Typical	T _{on}	0.10 ms		I _F = 5 mA
		Maximum			0.3 ms		I _L = Max.
	Turn off time*	Typical	T _{off}	0.03 ms			I _F = 5 mA
		Maximum		0.1 ms		I _L = Max.	
Transfer characteristics	I/O capacitance		Typical	C _{iso}	0.8 pF		f = 1 MHz
			Maximum		1.5 pF		V _B = 0 V
	Initial I/O isolation resistance		Minimum	R _{iso}	1,000 MΩ		500 V DC

Recommendable LED forward current I_F = 5mA.

*Turn on/Turn off time

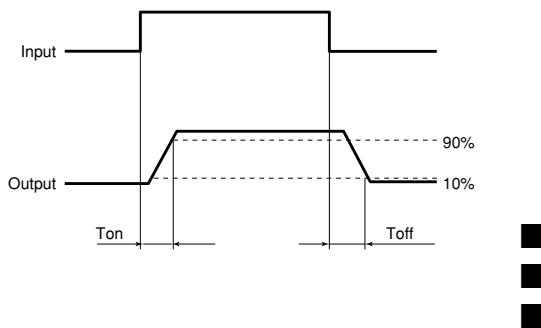


REFERENCE DATA


1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F


Type of connection: A



2. On resistance vs. ambient temperature characteristics

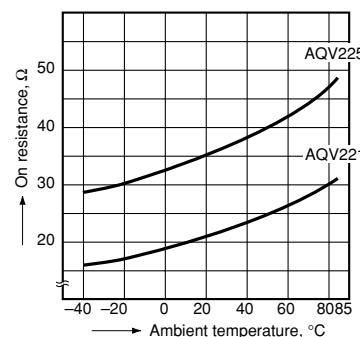Measured portion: between terminals 4 and 6;
LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)


3. Turn on time vs. ambient temperature characteristics

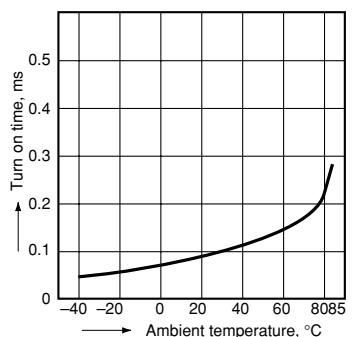Sample: AQV221, AQV225; LED current: 5 mA;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)

RF Photomos (AQV220)


4. Turn off time vs. ambient temperature characteristics

Sample: AQV221, AQV225; LED current: 5 mA;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)




5. LED operate current vs. ambient temperature characteristics

Sample: AQV221, AQV225;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)




6. LED turn off current vs. ambient temperature characteristics

Sample: AQV221, AQV225;
Load voltage: Max. (DC);
Continuous load current: Max. (DC)




7. LED dropout voltage vs. ambient temperature characteristics

Sample: AQV221, AQV225;
LED current: 5 to 50 mA




8. Current vs. voltage characteristics of output at MOS portion

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F




9. Off state leakage current vs. load voltage characteristics

Measured portion: between terminals 4 and 6;
Ambient temperature: 25°C 77°F




10. Turn on time vs. LED forward current characteristics

Sample: AQV221, AQV225;
Measured portion: between terminals 4 and 6;
Load voltage: Max. (DC);
Continuous load current: Max. (DC);
Ambient temperature: 25°C 77°F




11. Turn off time vs. LED forward current characteristics

Sample: AQV221, AQV225;
Measured portion: between terminals 4 and 6;
Load voltage: Max. (DC);
Continuous load current: Max. (DC);
Ambient temperature: 25°C 77°F




12. Output capacitance vs. applied voltage characteristics

Measured portion: between terminals 4 and 6;
Frequency: 1 MHz;
Ambient temperature: 25°C 77°F



13. Isolation vs. frequency characteristics (50Ω impedance)

Measured portion: between terminals 4 and 6;
Frequency: 1 MHz;
Ambient temperature: 25°C 77°F

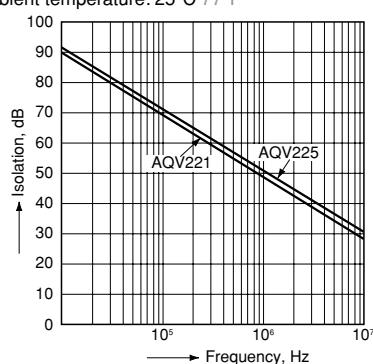

14. Insertion loss vs. frequency characteristics (50Ω impedance)

Measured portion: between terminals 4 and 6;
Frequency: 1 MHz;
Ambient temperature: 25°C 77°F

