



**MB95F394H/F396K/F398H/F394K/F396H/F398K**

## **CMOS F<sup>2</sup>MC-8FX MB95390H Series 8-bit Microcontrollers**

MB95390H is a series of general-purpose, single-chip microcontrollers. In addition to a compact instruction set, the microcontrollers of this series contain a variety of peripheral resources.

### **Features**

#### **F<sup>2</sup>MC-8FX CPU core**

Instruction set optimized for controllers

- Multiplication and division instructions
- 16-bit arithmetic operations
- Bit test branch instructions
- Bit manipulation instructions, etc.

#### **Clock**

- Selectable main clock source

Main OSC clock (up to 16.25 MHz, maximum machine clock frequency: 8.125 MHz)

External clock (up to 32.5 MHz, maximum machine clock frequency: 16.25 MHz)

Main CR clock (1/8/10/12.5 MHz  $\pm 2\%$  or  $\pm 2.5\%$ \*, maximum machine clock frequency: 12.5 MHz)

:The main CR clock oscillation accuracy of a product in LQFP package (FPT-48P-M49 or FPT-52P-M02) is  $\pm 2\%$  and that of a product in QFN package (LCC-48P-M11) is  $\pm 2.5\%$ .

- Selectable subclock source

Sub-OSC clock (32.768 kHz)

External clock (32.768 kHz)

Sub-CR clock (Typ: 100 kHz, Min: 50 kHz, Max: 200 kHz)

#### **Timer**

- 8/16-bit composite timer  $\times 2$  channels
- 8/16-bit PPG  $\times 3$  channels
- 16-bit PPG  $\times 1$  channel (can work independently or together with the multi-pulse generator)
- 16-bit reload timer  $\times 1$  channel (can work independently or together with the multi-pulse generator)
- Time-base timer  $\times 1$  channel
- Watch prescaler  $\times 1$  channel

#### **UART/SIO $\times 1$ channel**

- Full duplex double buffer
- Capable of clock-asynchronous (UART) serial data transfer and clock-synchronous (SIO) serial data transfer

#### **I<sup>2</sup>C $\times 1$ channel**

- Built-in wake-up function

#### **Multi-pulse generator (MPG) (for DC motor control) $\times 1$ channel**

- 16-bit reload timer  $\times 1$  channel
- 16-bit PPG timer  $\times 1$  channel
- Waveform sequencer (including a 16-bit timer equipped with a buffer and a compare clear function)

#### **LIN-UART**

- Full duplex double buffer
- Capable of clock-synchronous serial data transfer and clock-asynchronous serial data transfer

#### **External interrupt $\times 8$ channels**

- Interrupt by edge detection (rising edge, falling edge, and both edges can be selected)
- Can be used to wake up the device from different low power consumption (standby) modes

#### **8/10-bit A/D converter $\times 12$ channels**

- 8-bit and 10-bit resolution can be chosen.

#### **Low power consumption (standby) modes**

- Stop mode
- Sleep mode
- Watch mode
- Time-base timer mode

#### **I/O port**

- MB95F394H/F396H/F398H (maximum no. of I/O ports: 44)  
General-purpose I/O ports (N-ch open drain) ..... : 3  
General-purpose I/O ports (CMOS I/O) ..... : 41
- MB95F394K/F396K/F398K (maximum no. of I/O ports: 45)  
General-purpose I/O ports (N-ch open drain) ..... : 4  
General-purpose I/O ports (CMOS I/O) ..... : 41

### On-chip debug

- 1-wire serial control
- Serial writing supported (asynchronous mode)

### Hardware/software watchdog timer

- Built-in hardware watchdog timer
- Built-in software watchdog timer

### Low-voltage detection reset circuit

- Built-in low-voltage detector

### Clock supervisor counter

- Built-in clock supervisor counter function

### Programmable port input voltage level

- CMOS input level / hysteresis input level

### Dual operation Flash memory

- The erase/write operation and the read operation can be executed in different banks (upper bank/lower bank) simultaneously.

### Flash memory security function

- Protects the content of the Flash memory

## Contents

|                                                  |           |                                                |           |
|--------------------------------------------------|-----------|------------------------------------------------|-----------|
| <b>Product Line-up</b> .....                     | <b>3</b>  | Source Clock/Machine Clock .....               | 36        |
| <b>Packages and Corresponding Products</b> ..... | <b>5</b>  | External Reset .....                           | 38        |
| <b>Differences Among Products and Notes on</b>   |           | Power-on Reset .....                           | 39        |
| <b>Product Selection</b> .....                   | <b>6</b>  | Peripheral Input Timing .....                  | 40        |
| <b>Pin Assignment</b> .....                      | <b>7</b>  | LIN-UART Timing .....                          | 41        |
| <b>Pin Functions</b> .....                       | <b>10</b> | Low-voltage Detection .....                    | 47        |
| <b>I/O Circuit Type</b> .....                    | <b>14</b> | I2C Timing .....                               | 48        |
| <b>Notes On Device Handling</b> .....            | <b>17</b> | UART/SIO, Serial I/O Timing .....              | 51        |
| <b>Pin Connection</b> .....                      | <b>17</b> | MPG Input Timing .....                         | 53        |
| <b>Power supply pins</b> .....                   | <b>17</b> | A/D Converter .....                            | 54        |
| <b>Block Diagram</b> .....                       | <b>19</b> | A/D Converter Electrical Characteristics ..... | 54        |
| <b>CPU Core</b> .....                            | <b>20</b> | Notes on Using the A/D Converter .....         | 55        |
| <b>Interrupt Source Table</b> .....              | <b>27</b> | Definitions of A/D Converter Terms .....       | 56        |
| <b>Electrical Characteristics</b> .....          | <b>28</b> | Flash Memory Write/Erase Characteristics ..... | 58        |
| Absolute Maximum Ratings .....                   | 28        | <b>Sample Characteristics</b> .....            | <b>59</b> |
| Recommended Operating Conditions .....           | 30        | <b>Mask Options</b> .....                      | <b>65</b> |
| DC Characteristics .....                         | 31        | <b>Ordering Information</b> .....              | <b>66</b> |
| AC Characteristics .....                         | 34        | <b>Package Dimension</b> .....                 | <b>67</b> |
| Clock Timing .....                               | 34        | <b>Major Changes</b> .....                     | <b>70</b> |

## 1. Product Line-up

| Part number                      | MB95F394H                                                                                                                                                                                                                                                                                                                                                                                                          | MB95F396H  | MB95F398H  | MB95F394K                                                                                                                    | MB95F396K  | MB95F398K  |
|----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------------|------------------------------------------------------------------------------------------------------------------------------|------------|------------|
| Parameter                        |                                                                                                                                                                                                                                                                                                                                                                                                                    |            |            |                                                                                                                              |            |            |
| Type                             | Flash memory product                                                                                                                                                                                                                                                                                                                                                                                               |            |            |                                                                                                                              |            |            |
| Clock supervisor counter         | It supervises the main clock oscillation.                                                                                                                                                                                                                                                                                                                                                                          |            |            |                                                                                                                              |            |            |
| Program ROM capacity             | 20 Kbyte                                                                                                                                                                                                                                                                                                                                                                                                           | 36 Kbyte   | 60 Kbyte   | 20 Kbyte                                                                                                                     | 36 Kbyte   | 60 Kbyte   |
| RAM capacity                     | 496 bytes                                                                                                                                                                                                                                                                                                                                                                                                          | 1008 bytes | 2032 bytes | 496 bytes                                                                                                                    | 1008 bytes | 2032 bytes |
| Low-voltage detection reset      | No                                                                                                                                                                                                                                                                                                                                                                                                                 |            |            | Yes                                                                                                                          |            |            |
| Reset input                      | Dedicated                                                                                                                                                                                                                                                                                                                                                                                                          |            |            | Selected through software                                                                                                    |            |            |
| CPU functions                    | <ul style="list-style-type: none"><li>• Number of basic instructions : 136</li><li>• Instruction bit length : 8 bits</li><li>• Instruction length : 1 to 3 bytes</li><li>• Data bit length : 1, 8 and 16 bits</li><li>• Minimum instruction execution time : 61.5 ns (with machine clock frequency = 16.25 MHz)</li><li>• Interrupt processing time : 0.6 μs (with machine clock frequency = 16.25 MHz)</li></ul>  |            |            |                                                                                                                              |            |            |
| General-purpose I/O              | <ul style="list-style-type: none"><li>• I/O ports (Max) : 44</li><li>• CMOS I/O : 41</li><li>• N-ch open drain : 3</li></ul>                                                                                                                                                                                                                                                                                       |            |            | <ul style="list-style-type: none"><li>• I/O ports (Max) : 45</li><li>• CMOS I/O : 41</li><li>• N-ch open drain : 4</li></ul> |            |            |
| Time-base timer                  | Interval time: 0.256 ms to 8.3 s (with external clock frequency = 4 MHz)                                                                                                                                                                                                                                                                                                                                           |            |            |                                                                                                                              |            |            |
| Hardware/software watchdog timer | <ul style="list-style-type: none"><li>• Reset generation cycle<ul style="list-style-type: none"><li>- Main oscillation clock at 10 MHz: 105 ms (Min)</li></ul></li><li>• The sub-CR clock can be used as the source clock of the hardware watchdog timer.</li></ul>                                                                                                                                                |            |            |                                                                                                                              |            |            |
| Wild register                    | It can be used to replace three bytes of data.                                                                                                                                                                                                                                                                                                                                                                     |            |            |                                                                                                                              |            |            |
| LIN-UART                         | <ul style="list-style-type: none"><li>• A wide range of communication speeds can be selected by a dedicated reload timer.</li><li>• Clock-synchronous serial data transfer and clock-asynchronous serial data transfer is enabled.</li><li>• The LIN function can be used as a LIN master or a LIN slave.</li></ul>                                                                                                |            |            |                                                                                                                              |            |            |
| 8/10-bit A/D converter           | 12 channels<br>8-bit resolution and 10-bit resolution can be chosen.                                                                                                                                                                                                                                                                                                                                               |            |            |                                                                                                                              |            |            |
| 8/16-bit composite timer         | 2 channels <ul style="list-style-type: none"><li>• The timer can be configured as an "8-bit timer × 2 channels" or a "16-bit timer × 1 channel".</li><li>• It has the following functions: timer function, PWC function, PWM function and input capture function.</li><li>• Count clock: it can be selected from internal clocks (seven types) and external clocks.</li><li>• It can output square wave.</li></ul> |            |            |                                                                                                                              |            |            |
| External interrupt               | 8 channels <ul style="list-style-type: none"><li>• Interrupt by edge detection (The rising edge, falling edge, or both edges can be selected.)</li><li>• It can be used to wake up the device from different standby modes.</li></ul>                                                                                                                                                                              |            |            |                                                                                                                              |            |            |
| On-chip debug                    | <ul style="list-style-type: none"><li>• 1-wire serial control</li><li>• It supports serial writing. (asynchronous mode)</li></ul>                                                                                                                                                                                                                                                                                  |            |            |                                                                                                                              |            |            |

(Continued)

(Continued)

| Part number                                  | MB95F394H                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | MB95F396H | MB95F398H | MB95F394K | MB95F396K | MB95F398K |
|----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-----------|-----------|-----------|-----------|
| Parameter                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |           |           |           |           |           |
| UART/SIO                                     | 1 channel <ul style="list-style-type: none"> <li>Data transfer with UART/SIO is enabled.</li> <li>It has a full duplex double buffer, variable data length (5/6/7/8 bits), a built-in baud rate generator and an error detection function.</li> <li>It uses the NRZ type transfer format.</li> <li>LSB-first data transfer and MSB-first data transfer are available to use.</li> <li>Clock-asynchronous (UART) serial data transfer and clock-synchronous (SIO) serial data transfer is enabled.</li> </ul> |           |           |           |           |           |
| I <sup>2</sup> C                             | 1 channel <ul style="list-style-type: none"> <li>Master/slave transmission and receiving</li> <li>It has the following functions: bus error function, arbitration function, transmission direction detection function, wake-up function, and functions of generating and detecting repeated START conditions.</li> </ul>                                                                                                                                                                                     |           |           |           |           |           |
| 8/16-bit PPG                                 | 3 channels <ul style="list-style-type: none"> <li>Each channel of PPG can be used as two 8-bit PPG channels or a single 16-bit PPG channel.</li> <li>The counter operating clock can be selected from eight clock sources.</li> </ul>                                                                                                                                                                                                                                                                        |           |           |           |           |           |
| 16-bit PPG                                   | <ul style="list-style-type: none"> <li>PWM mode and one-shot mode are available to use.</li> <li>The counter operating clock can be selected from eight clock sources.</li> <li>It supports external trigger start.</li> <li>It can work independently or together with the multi-pulse generator.</li> </ul>                                                                                                                                                                                                |           |           |           |           |           |
| 16-bit reload timer                          | <ul style="list-style-type: none"> <li>Two clock modes and two counter operating modes are available to use.</li> <li>It can output square waveform.</li> <li>Count clock: it can be selected from internal clocks (seven types) and external clocks.</li> <li>Two counter operating modes: reload mode and one-shot mode</li> <li>It can work independently or together with the multi-pulse generator.</li> </ul>                                                                                          |           |           |           |           |           |
| Multi-pulse generator (for DC motor control) | <ul style="list-style-type: none"> <li>16-bit PPG timer: 1 channel</li> <li>16-bit reload timer operations: toggle output, one-shot output</li> <li>Event counter: 1 channel</li> <li>Waveform sequencer (including a 16-bit timer equipped with a buffer and a compare clear function)</li> </ul>                                                                                                                                                                                                           |           |           |           |           |           |
| Watch prescaler                              | Eight different time intervals can be selected.                                                                                                                                                                                                                                                                                                                                                                                                                                                              |           |           |           |           |           |
| Flash memory                                 | <ul style="list-style-type: none"> <li>It supports automatic programming, Embedded Algorithm, and write/erase/erase-suspend/erase-resume commands.</li> <li>It has a flag indicating the completion of the operation of Embedded Algorithm.</li> <li>Number of write/erase cycles: 100000</li> <li>Data retention time: 20 years</li> <li>Flash security feature for protecting the content of the Flash memory</li> </ul>                                                                                   |           |           |           |           |           |
| Standby mode                                 | Sleep mode, stop mode, watch mode, time-base timer mode                                                                                                                                                                                                                                                                                                                                                                                                                                                      |           |           |           |           |           |
| Package                                      | FPT-48P-M49<br>FPT-52P-M02<br>LCC-48P-M11                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |           |           |           |           |           |

## 2. Packages and Corresponding Products

| Part number<br>Package | MB95F394H | MB95F396H | MB95F398H | MB95F394K | MB95F396K | MB95F398K |
|------------------------|-----------|-----------|-----------|-----------|-----------|-----------|
| FPT-48P-M49            | O         | O         | O         | O         | O         | O         |
| FPT-52P-M02            | O         | O         | O         | O         | O         | O         |
| LCC-48P-M11            | O         | O         | O         | O         | O         | O         |

O: Available

### **3. Differences Among Products and Notes on Product Selection**

#### ■ Current consumption

When using the on-chip debug function, take account of the current consumption of flash erase/write.

For details of current consumption, see “Electrical Characteristics”.

#### ■ Package

For details of information on each package, see “Packages and Corresponding Products” and “Package Dimension”.

#### ■ Operating voltage


The operating voltage varies, depending on whether the on-chip debug function is used or not.

For details of the operating voltage, see “Electrical Characteristics”.

#### ■ On-chip debug function


The on-chip debug function requires that  $V_{CC}$ ,  $V_{SS}$  and one serial wire be connected to an evaluation tool. For details of the connection method, refer to “CHAPTER 29 EXAMPLE OF SERIAL PROGRAMMING CONNECTION” in the hardware manual of the MB95390H Series.

## 4. Pin Assignment

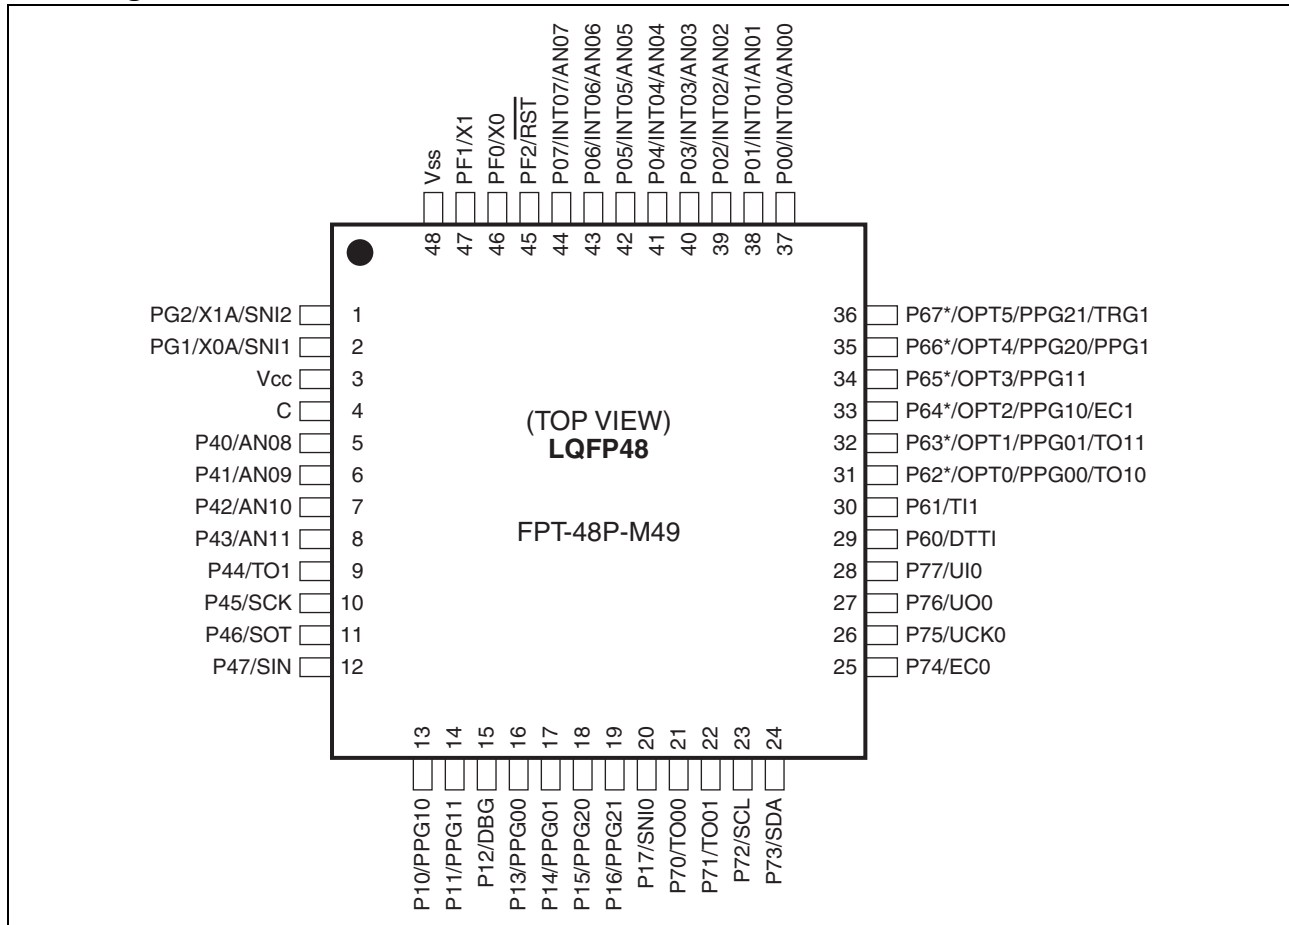

\*: High-current pin (8 mA/12 mA)


(Continued)

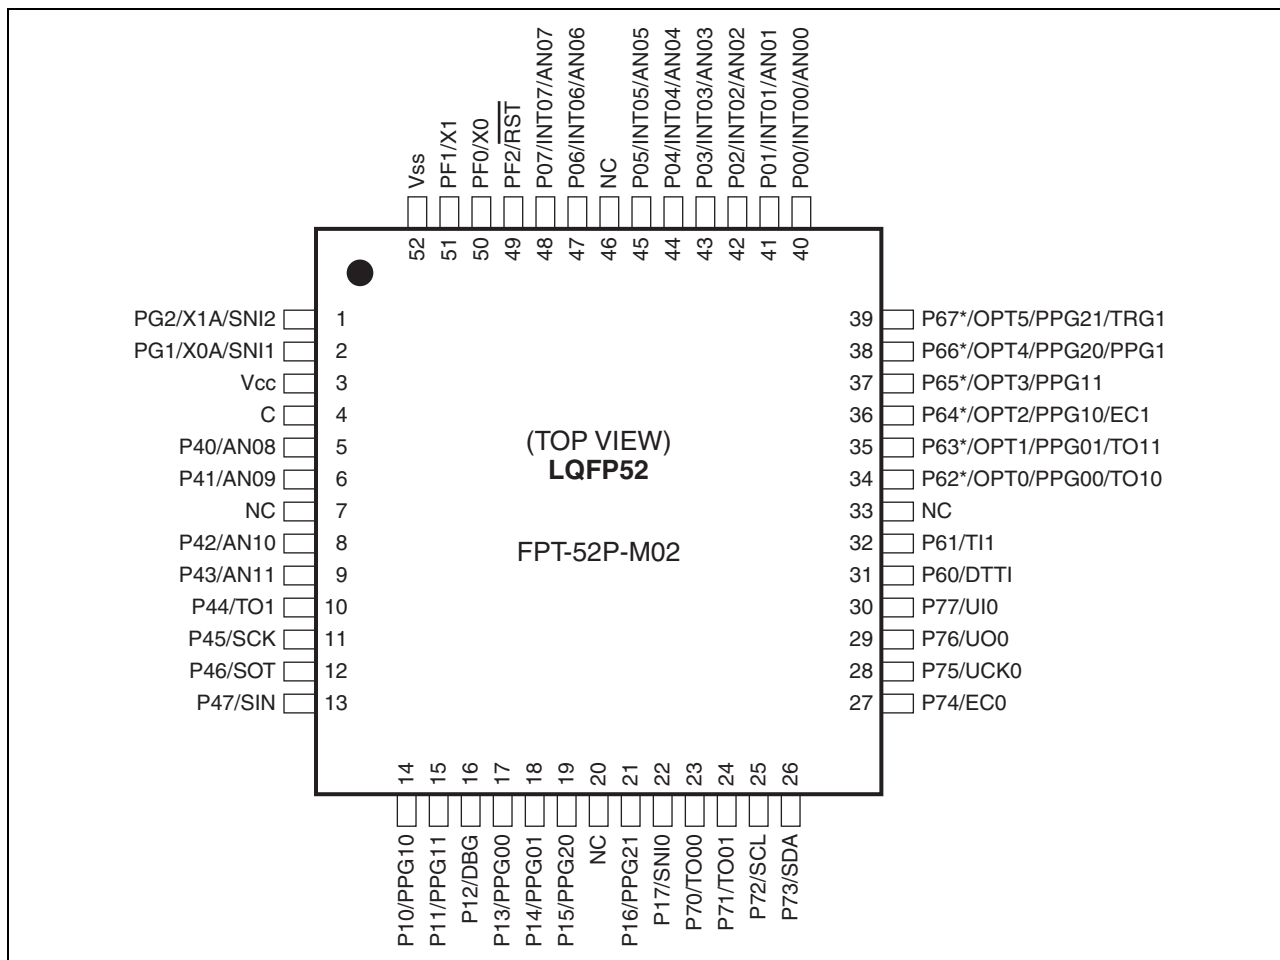

\*: High-current pin (8 mA/12 mA)

(Continued)

(Continued)

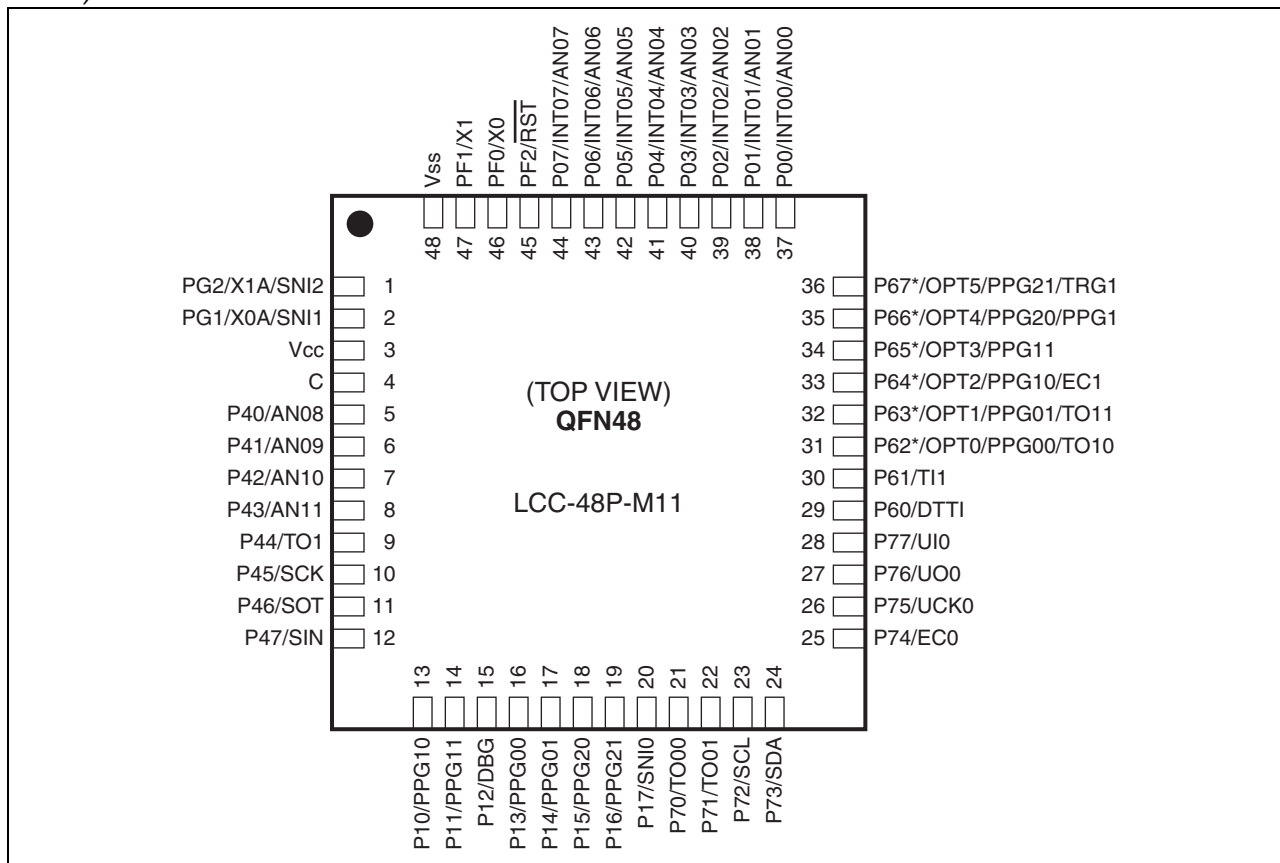

\*: High-current pin (8 mA/12 mA)

## 5. Pin Functions

| Pin no.  |         |          | Pin name        | I/O circuit type*4 | Function                                                                            |
|----------|---------|----------|-----------------|--------------------|-------------------------------------------------------------------------------------|
| LQFP48*1 | QFN48*2 | LQFP52*3 |                 |                    |                                                                                     |
| 1        | 1       | 1        | PG2             | C                  | General-purpose I/O port                                                            |
|          |         |          | X1A             |                    | Subclock I/O oscillation pin                                                        |
|          |         |          | SN12            |                    | Trigger input pin for the position detection function of the MPG waveform sequencer |
| 2        | 2       | 2        | PG1             | C                  | General-purpose I/O port                                                            |
|          |         |          | X0A             |                    | Subclock input oscillation pin                                                      |
|          |         |          | SN11            |                    | Trigger input pin for the position detection function of the MPG waveform sequencer |
| 3        | 3       | 3        | V <sub>CC</sub> | —                  | Power supply pin                                                                    |
| 4        | 4       | 4        | C               | —                  | Capacitor connection pin                                                            |
| 5        | 5       | 5        | P40             | K                  | General-purpose I/O port                                                            |
|          |         |          | AN08            |                    | A/D converter analog input pin                                                      |
| 6        | 6       | 6        | P41             | K                  | General-purpose I/O port                                                            |
|          |         |          | AN09            |                    | A/D converter analog input pin                                                      |
| —        | —       | 7        | NC              | —                  | It is an internally connected pin. Always leave it unconnected.                     |
| 7        | 7       | 8        | P42             | K                  | General-purpose I/O port                                                            |
|          |         |          | AN10            |                    | A/D converter analog input pin                                                      |
| 8        | 8       | 9        | P43             | K                  | General-purpose I/O port                                                            |
|          |         |          | AN11            |                    | A/D converter analog input pin                                                      |
| 9        | 9       | 10       | P44             | G                  | General-purpose I/O port                                                            |
|          |         |          | TO1             |                    | 16-bit reload timer ch. 0 output pin                                                |
| 10       | 10      | 11       | P45             | G                  | General-purpose I/O port                                                            |
|          |         |          | SCK             |                    | LIN-UART clock I/O pin                                                              |
| 11       | 11      | 12       | P46             | G                  | General-purpose I/O port                                                            |
|          |         |          | SOT             |                    | LIN-UART data output pin                                                            |
| 12       | 12      | 13       | P47             | J                  | General-purpose I/O port                                                            |
|          |         |          | SIN             |                    | LIN-UART data input pin                                                             |
| 13       | 13      | 14       | P10             | G                  | General-purpose I/O port                                                            |
|          |         |          | PPG10           |                    | 8/16-bit PPG ch. 1 output pin                                                       |
| 14       | 14      | 15       | P11             | G                  | General-purpose I/O port                                                            |
|          |         |          | PPG11           |                    | 8/16-bit PPG ch. 1 output pin                                                       |
| 15       | 15      | 16       | P12             | H                  | General-purpose I/O port                                                            |
|          |         |          | DBG             |                    | DBG input pin                                                                       |
| 16       | 16      | 17       | P13             | G                  | General-purpose I/O port                                                            |
|          |         |          | PPG00           |                    | 8/16-bit PPG ch. 0 output pin                                                       |

(Continued)

| Pin no.  |         |          | Pin name | I/O circuit type*4 | Function                                                                            |
|----------|---------|----------|----------|--------------------|-------------------------------------------------------------------------------------|
| LQFP48*1 | QFN48*2 | LQFP52*3 |          |                    |                                                                                     |
| 17       | 17      | 18       | P14      | G                  | General-purpose I/O port                                                            |
|          |         |          | PPG01    |                    | 8/16-bit PPG ch. 0 output pin                                                       |
| 18       | 18      | 19       | P15      | G                  | General-purpose I/O port                                                            |
|          |         |          | PPG20    |                    | 8/16-bit PPG ch. 2 output pin                                                       |
| —        | —       | 20       | NC       | —                  | It is an internally connected pin. Always leave it unconnected.                     |
| 19       | 19      | 21       | P16      | G                  | General-purpose I/O port                                                            |
|          |         |          | PPG21    |                    | 8/16-bit PPG ch. 2 output pin                                                       |
| 20       | 20      | 22       | P17      | G                  | General-purpose I/O port                                                            |
|          |         |          | SNI0     |                    | Trigger input pin for the position detection function of the MPG waveform sequencer |
| 21       | 21      | 23       | P70      | G                  | General-purpose I/O port                                                            |
|          |         |          | TO00     |                    | 8/16-bit composite timer ch. 0 output pin                                           |
| 22       | 22      | 24       | P71      | G                  | General-purpose I/O port                                                            |
|          |         |          | TO01     |                    | 8/16-bit composite timer ch. 0 output pin                                           |
| 23       | 23      | 25       | P72      | I                  | General-purpose I/O port                                                            |
|          |         |          | SCL      |                    | I <sup>2</sup> C clock I/O pin                                                      |
| 24       | 24      | 26       | P73      | I                  | General-purpose I/O port                                                            |
|          |         |          | SDA      |                    | I <sup>2</sup> C data I/O pin                                                       |
| 25       | 25      | 27       | P74      | G                  | General-purpose I/O port                                                            |
|          |         |          | EC0      |                    | 8/16-bit composite timer ch. 0 clock input pin                                      |
| 26       | 26      | 28       | P75      | G                  | General-purpose I/O port                                                            |
|          |         |          | UCK0     |                    | UART/SIO ch. 0 clock I/O pin                                                        |
| 27       | 27      | 29       | P76      | G                  | General-purpose I/O port                                                            |
|          |         |          | UO0      |                    | UART/SIO ch. 0 data output pin                                                      |
| 28       | 28      | 30       | P77      | J                  | General-purpose I/O port                                                            |
|          |         |          | UI0      |                    | UART/SIO ch. 0 data input pin                                                       |
| 29       | 29      | 31       | P60      | G                  | General-purpose I/O port                                                            |
|          |         |          | DTTI     |                    | MPG waveform sequencer input pin                                                    |
| 30       | 30      | 32       | P61      | G                  | General-purpose I/O port                                                            |
|          |         |          | TI1      |                    | 16-bit reload timer ch. 0 input pin                                                 |
| —        | —       | 33       | NC       | —                  | It is an internally connected pin. Always leave it unconnected.                     |
| 31       | 31      | 34       | P62      | D                  | General-purpose I/O port<br>High-current pin                                        |
|          |         |          | OPT0     |                    | MPG waveform sequencer output pin                                                   |
|          |         |          | PPG00    |                    | 8/16-bit PPG ch. 0 output pin                                                       |
|          |         |          | TO10     |                    | 8/16-bit composite timer ch. 1 output pin                                           |

(Continued)

| Pin no.  |         |          | Pin name | I/O circuit type*4 | Function                                       |
|----------|---------|----------|----------|--------------------|------------------------------------------------|
| LQFP48*1 | QFN48*2 | LQFP52*3 |          |                    |                                                |
| 32       | 32      | 35       | P63      | D                  | General-purpose I/O port<br>High-current pin   |
|          |         |          | OPT1     |                    | MPG waveform sequencer output pin              |
|          |         |          | PPG01    |                    | 8/16-bit PPG ch. 0 output pin                  |
|          |         |          | TO11     |                    | 8/16-bit composite timer ch. 1 output pin      |
| 33       | 33      | 36       | P64      | D                  | General-purpose I/O port<br>High-current pin   |
|          |         |          | OPT2     |                    | MPG waveform sequencer output pin              |
|          |         |          | PPG10    |                    | 8/16-bit PPG ch. 1 output pin                  |
|          |         |          | EC1      |                    | 8/16-bit composite timer ch. 1 clock input pin |
| 34       | 34      | 37       | P65      | D                  | General-purpose I/O port<br>High-current pin   |
|          |         |          | OPT3     |                    | MPG waveform sequencer output pin              |
|          |         |          | PPG11    |                    | 8/16-bit PPG ch. 1 output pin                  |
| 35       | 35      | 38       | P66      | D                  | General-purpose I/O port<br>High-current pin   |
|          |         |          | OPT4     |                    | MPG waveform sequencer output pin              |
|          |         |          | PPG20    |                    | 8/16-bit PPG ch. 2 output pin                  |
|          |         |          | PPG1     |                    | 16-bit PPG ch. 1 output pin                    |
| 36       | 36      | 39       | P67      | D                  | General-purpose I/O port<br>High-current pin   |
|          |         |          | OPT5     |                    | MPG waveform sequencer output pin              |
|          |         |          | PPG21    |                    | 8/16-bit PPG ch. 2 output pin                  |
|          |         |          | TRG1     |                    | 16-bit PPG ch. 1 trigger input pin             |
| 37       | 37      | 40       | P00      | E                  | General-purpose I/O port                       |
|          |         |          | INT00    |                    | External interrupt input pin                   |
|          |         |          | AN00     |                    | A/D converter analog input pin                 |
| 38       | 38      | 41       | P01      | E                  | General-purpose I/O port                       |
|          |         |          | INT01    |                    | External interrupt input pin                   |
|          |         |          | AN01     |                    | A/D converter analog input pin                 |
| 39       | 39      | 42       | P02      | E                  | General-purpose I/O port                       |
|          |         |          | INT02    |                    | External interrupt input pin                   |
|          |         |          | AN02     |                    | A/D converter analog input pin                 |
| 40       | 40      | 43       | P03      | E                  | General-purpose I/O port                       |
|          |         |          | INT03    |                    | External interrupt input pin                   |
|          |         |          | AN03     |                    | A/D converter analog input pin                 |

(Continued)

(Continued)

| Pin no.  |         |          | Pin name        | I/O circuit type*4 | Function                                                        |
|----------|---------|----------|-----------------|--------------------|-----------------------------------------------------------------|
| LQFP48*1 | QFN48*2 | LQFP52*3 |                 |                    |                                                                 |
| 41       | 41      | 44       | P04             | E                  | General-purpose I/O port                                        |
|          |         |          | INT04           |                    | External interrupt input pin                                    |
|          |         |          | AN04            |                    | A/D converter analog input pin                                  |
| 42       | 42      | 45       | P05             | E                  | General-purpose I/O port                                        |
|          |         |          | INT05           |                    | External interrupt input pin                                    |
|          |         |          | AN05            |                    | A/D converter analog input pin                                  |
| —        | —       | 46       | NC              | —                  | It is an internally connected pin. Always leave it unconnected. |
| 43       | 43      | 47       | P06             | E                  | General-purpose I/O port                                        |
|          |         |          | INT06           |                    | External interrupt input pin                                    |
|          |         |          | AN06            |                    | A/D converter analog input pin                                  |
| 44       | 44      | 48       | P07             | E                  | General-purpose I/O port                                        |
|          |         |          | INT07           |                    | External interrupt input pin                                    |
|          |         |          | AN07            |                    | A/D converter analog input pin                                  |
| 45       | 45      | 49       | PF2             | A                  | General-purpose I/O port                                        |
|          |         |          | RST             |                    | Reset pin<br>Dedicated reset pin in MB95F394H/F396H/F398H       |
| 46       | 46      | 50       | PF0             | B                  | General-purpose I/O port                                        |
|          |         |          | X0              |                    | Main clock I/O oscillation pin                                  |
| 47       | 47      | 51       | PF1             | B                  | General-purpose I/O port                                        |
|          |         |          | X1              |                    | Main clock I/O oscillation pin                                  |
| 48       | 48      | 52       | V <sub>SS</sub> | —                  | Power supply pin (GND)                                          |




\*1: Package code: FPT-48P-M49






\*2: Package code: LCC-48P-M11

\*3: Package code: FPT-52P-M02

\*4: For the I/O circuit types, see "I/O Circuit Type".




## 6. I/O Circuit Type
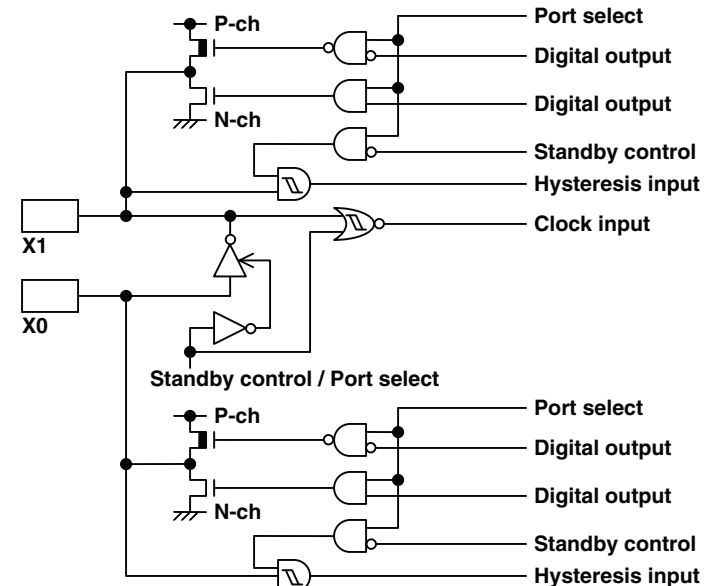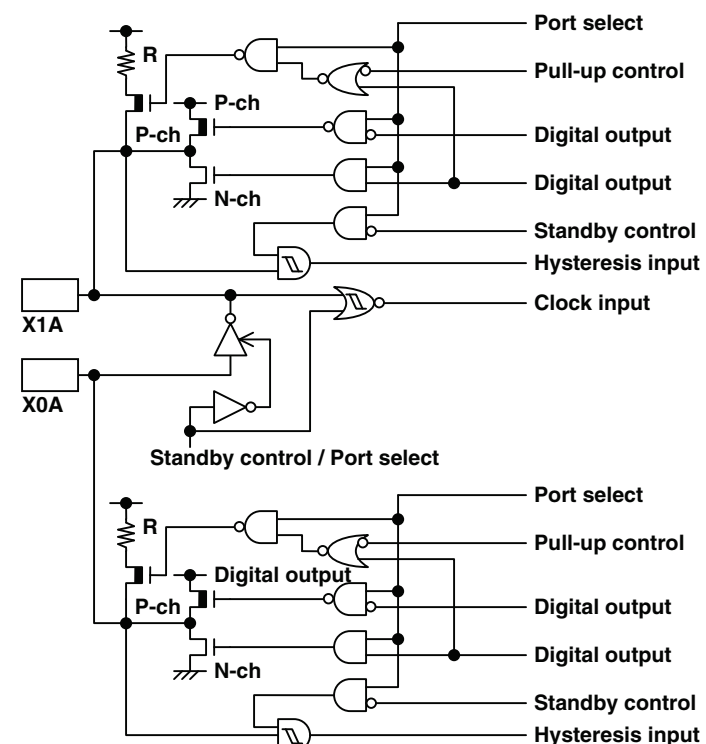
| Type | Circuit                                                                             | Remarks                                                                                                                                                                                                                                 |
|------|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| A    |    | <ul style="list-style-type: none"> <li>■ N-ch open drain output</li> <li>■ Hysteresis input</li> <li>■ Reset output</li> </ul>                                                                                                          |
| B    |   | <ul style="list-style-type: none"> <li>■ Oscillation circuit</li> <li>■ High-speed side</li> <li>■ Feedback resistance: approx. 1 MΩ</li> <li>■ CMOS output</li> <li>■ Hysteresis input</li> </ul>                                      |
| C    |  | <ul style="list-style-type: none"> <li>■ Oscillation circuit</li> <li>■ Low-speed side</li> <li>■ Feedback resistance: approx. 10 MΩ</li> <li>■ CMOS output</li> <li>■ Hysteresis input</li> <li>■ Pull-up control available</li> </ul> |
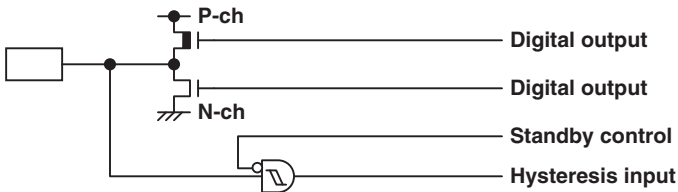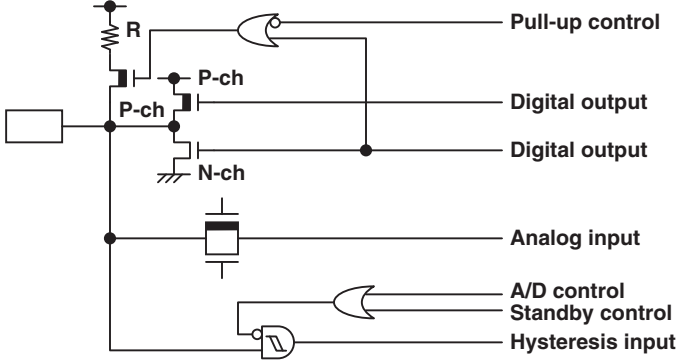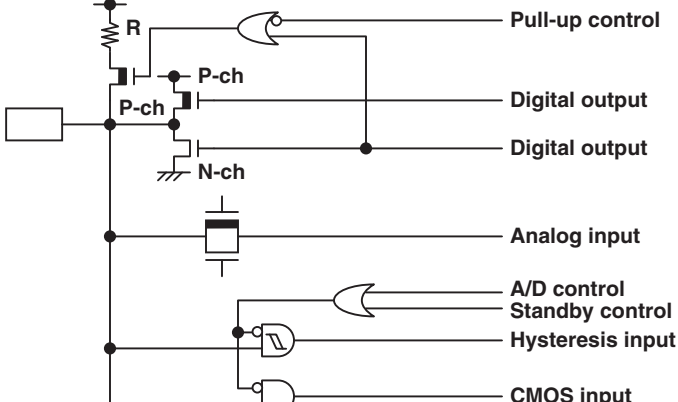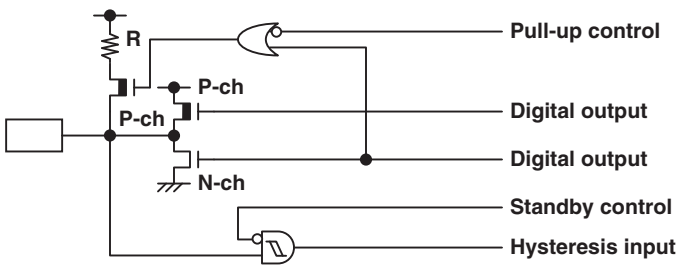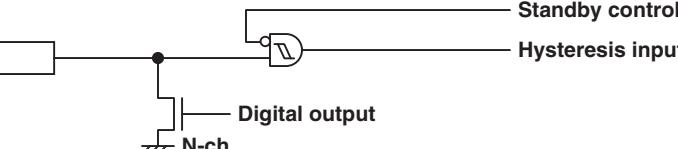
| Type | Circuit                                                                                                                                                                                                                                           | Remarks                                                                                                                                                                        |
|------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| D    |  <p> Digital output<br/> Digital output<br/> Standby control<br/> Hysteresis input </p>                                                                          | <ul style="list-style-type: none"> <li>■ CMOS output</li> <li>■ Hysteresis input</li> <li>■ High-current output</li> </ul>                                                     |
| E    |  <p> Pull-up control<br/> Digital output<br/> Digital output<br/> Analog input<br/> A/D control<br/> Standby control<br/> Hysteresis input </p>                  | <ul style="list-style-type: none"> <li>■ CMOS output</li> <li>■ Hysteresis input</li> <li>■ Pull-up control available</li> <li>■ Analog input</li> </ul>                       |
| F    |  <p> Pull-up control<br/> Digital output<br/> Digital output<br/> Analog input<br/> A/D control<br/> Standby control<br/> Hysteresis input<br/> CMOS input </p> | <ul style="list-style-type: none"> <li>■ CMOS output</li> <li>■ Hysteresis input</li> <li>■ CMOS input</li> <li>■ Pull-up control available</li> <li>■ Analog input</li> </ul> |
| G    |  <p> Pull-up control<br/> Digital output<br/> Digital output<br/> Standby control<br/> Hysteresis input </p>                                                   | <ul style="list-style-type: none"> <li>■ CMOS output</li> <li>■ Hysteresis input</li> <li>■ Pull-up control available</li> </ul>                                               |
| H    |  <p> Standby control<br/> Hysteresis input<br/> Digital output<br/> N-ch </p>                                                                                  | <ul style="list-style-type: none"> <li>■ N-ch open drain output</li> <li>■ Hysteresis input</li> </ul>                                                                         |

(Continued)

(Continued)
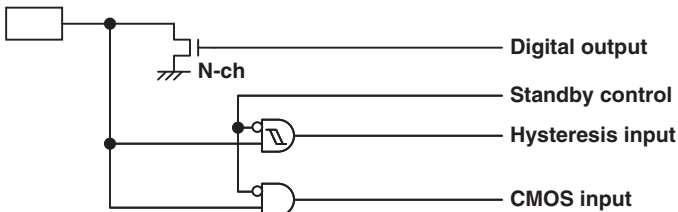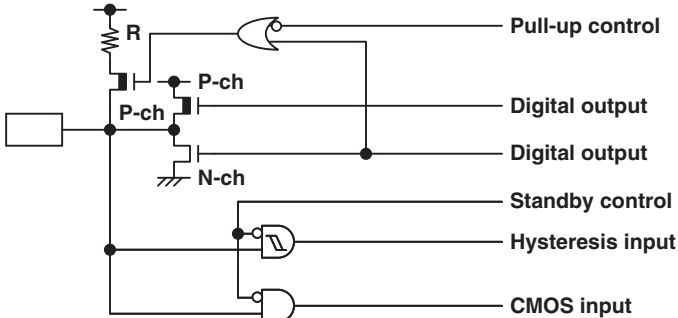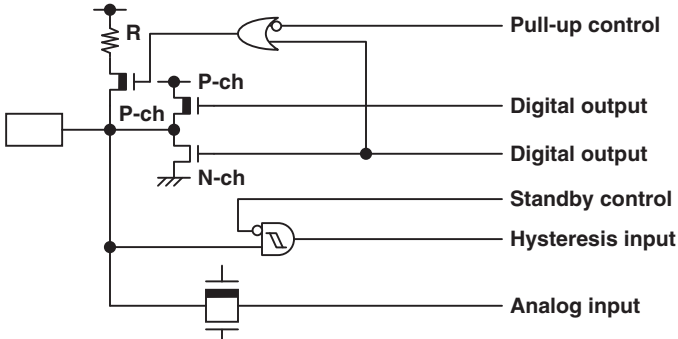
| Type | Circuit                                                                                                                                                                                                                                                                                            | Remarks                                                                                                                                                  |
|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| I    |  <p>             Digital output<br/>             Standby control<br/>             Hysteresis input<br/>             CMOS input           </p>                                                                     | <ul style="list-style-type: none"> <li>■ N-ch open drain output</li> <li>■ Hysteresis input</li> <li>■ CMOS input</li> </ul>                             |
| J    |  <p>             Pull-up control<br/>             Digital output<br/>             Digital output<br/>             Standby control<br/>             Hysteresis input<br/>             CMOS input           </p>    | <ul style="list-style-type: none"> <li>■ CMOS output</li> <li>■ Hysteresis input</li> <li>■ CMOS input</li> <li>■ Pull-up control available</li> </ul>   |
| K    |  <p>             Pull-up control<br/>             Digital output<br/>             Digital output<br/>             Standby control<br/>             Hysteresis input<br/>             Analog input           </p> | <ul style="list-style-type: none"> <li>■ Hysteresis input</li> <li>■ CMOS output</li> <li>■ Pull-up control available</li> <li>■ Analog input</li> </ul> |

## 7. Notes On Device Handling

### ■ Preventing latch-ups

When using the device, ensure that the voltage applied does not exceed the maximum voltage rating.

In a CMOS IC, if a voltage higher than  $V_{CC}$  or a voltage lower than  $V_{SS}$  is applied to an input/output pin that is neither a medium-withstand voltage pin nor a high-withstand voltage pin, or if a voltage out of the rating range of power supply voltage mentioned in "14.1 Absolute Maximum Ratings" of "Electrical Characteristics" is applied to the  $V_{CC}$  pin or the  $V_{SS}$  pin, a latch-up may occur.

When a latch-up occurs, power supply current increases significantly, which may cause a component to be thermally destroyed.

### ■ Stabilizing supply voltage

Supply voltage must be stabilized.

A malfunction may occur when power supply voltage fluctuates rapidly even though the fluctuation is within the guaranteed operating range of the  $V_{CC}$  power supply voltage.

As a rule of voltage stabilization, suppress voltage fluctuation so that the fluctuation in  $V_{CC}$  ripple (p-p value) at the commercial frequency (50 Hz/60 Hz) does not exceed 10% of the standard  $V_{CC}$  value, and the transient fluctuation rate does not exceed 0.1 V/ms at a momentary fluctuation such as switching the power supply.

### ■ Notes on using the external clock

When an external clock is used, oscillation stabilization wait time is required for power-on reset, wake-up from subclock mode or stop mode.

## 8. Pin Connection

### ■ Treatment of unused pins

If an unused input pin is left unconnected, a component may be permanently damaged due to malfunctions or latch-ups. Always pull up or pull down an unused input pin through a resistor of at least 2 k $\Omega$ . Set an unused input/output pin to the output state and leave it unconnected, or set it to the input state and treat it the same as an unused input pin. If there is an unused output pin, leave it unconnected.

## 9. Power supply pins

To reduce unnecessary electro-magnetic emission, prevent malfunctions of strobe signals due to an increase in the ground level, and conform to the total output current standard, always connect the  $V_{CC}$  pin and the  $V_{SS}$  pin to the power supply and ground outside the device. In addition, connect the current supply source to the  $V_{CC}$  pin and the  $V_{SS}$  pin with low impedance.

It is also advisable to connect a ceramic capacitor of approximately 0.1  $\mu$ F as a bypass capacitor between the  $V_{CC}$  pin and the  $V_{SS}$  pin at a location close to this device.

### ■ DBG pin

Connect the DBG pin directly to an external pull-up resistor.

To prevent the device from unintentionally entering the debug mode due to noise, minimize the distance between the DBG pin and the  $V_{CC}$  or  $V_{SS}$  pin when designing the layout of the printed circuit board.

The DBG pin should not stay at "L" level after power-on until the reset output is released.

### ■ $\overline{RST}$ pin

Connect the  $\overline{RST}$  pin directly to an external pull-up resistor.


To prevent the device from unintentionally entering the reset mode due to noise, minimize the distance between the  $\overline{RST}$  pin and the  $V_{CC}$  or  $V_{SS}$  pin when designing the layout of the printed circuit board.

The  $\overline{RST}$ /PF2 pin functions as the reset input/output pin after power-on. In addition, the reset output of the  $\overline{RST}$ /PF2 pin can be enabled by the RSTOE bit in the SYSC register, and the reset input function and the general purpose I/O function can be selected by the RSTEN bit in the SYSC register.


## ■ C pin

Use a ceramic capacitor or a capacitor with equivalent frequency characteristics. The bypass capacitor for the  $V_{CC}$  pin must have a capacitance larger than  $C_S$ . For the connection to a smoothing capacitor  $C_S$ , see the diagram below. To prevent the device from unintentionally entering a mode to which the device is not set to transit due to noise, minimize the distance between the C pin and  $C_S$  and the distance between  $C_S$  and the  $V_{SS}$  pin when designing the layout of a printed circuit board.

### • DBG/ $\overline{\text{RST}}$ /C pins connection diagram

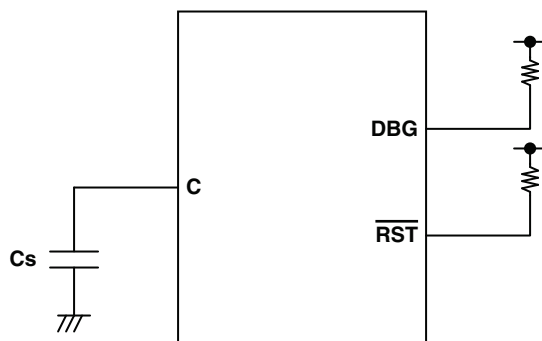

## 10. Block Diagram

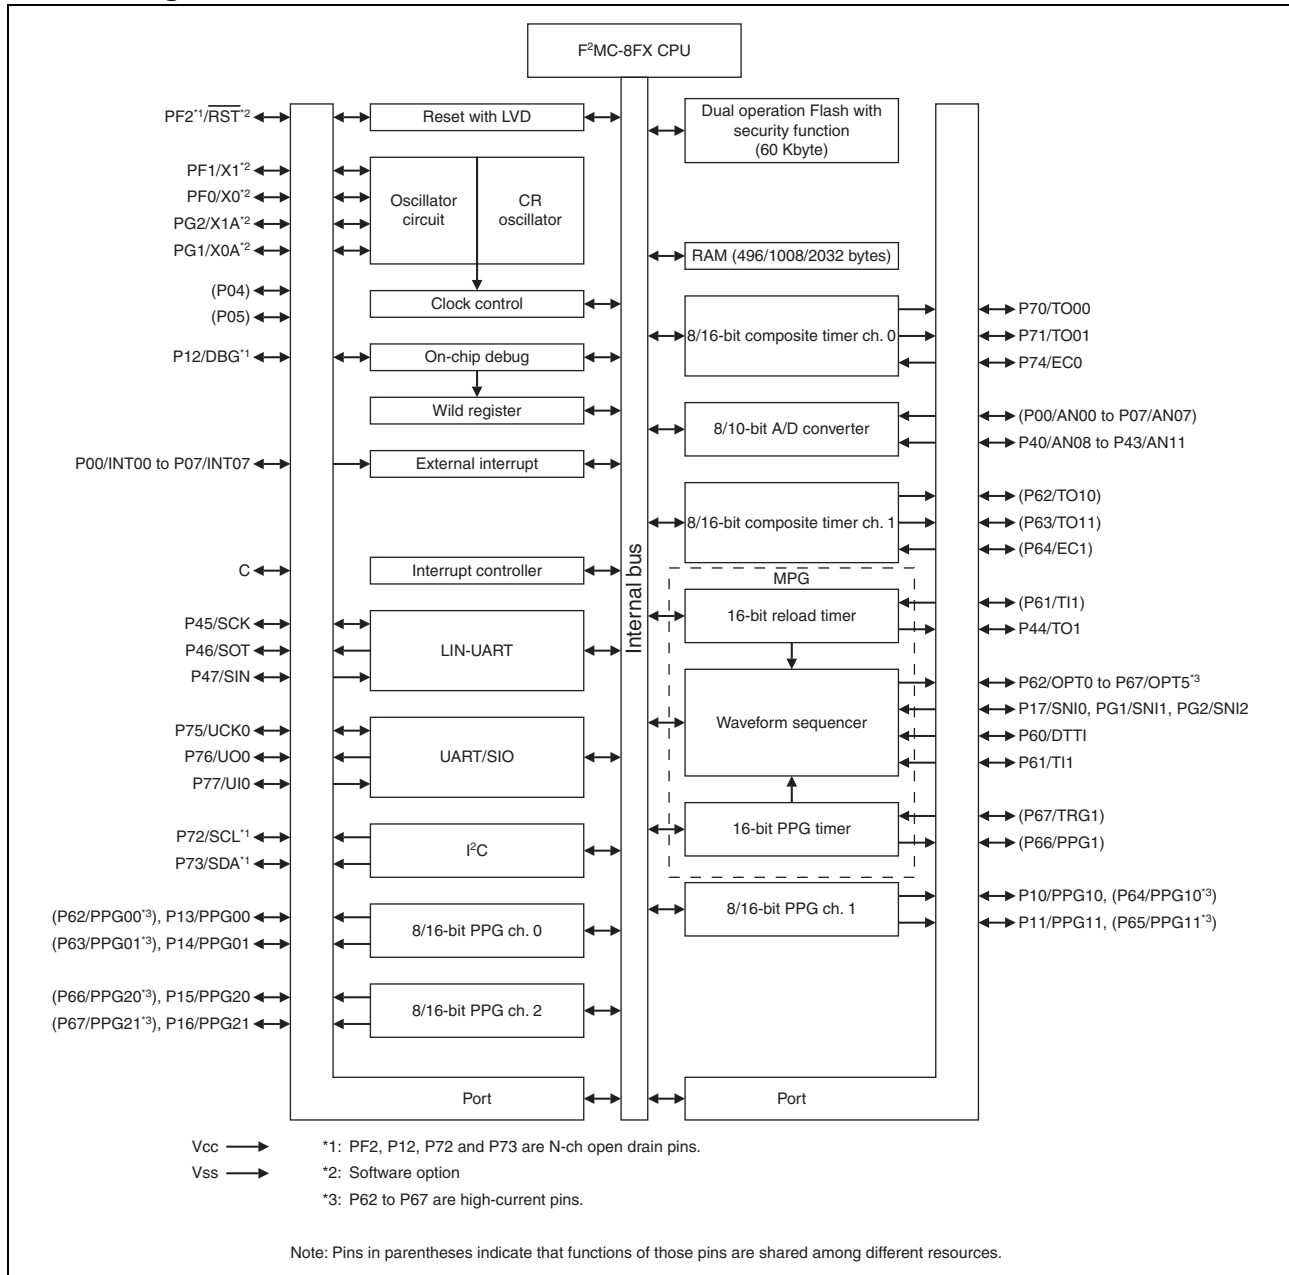


## 11. CPU Core

### ■ Memory Space

The memory space of the MB95390H Series is 64 Kbyte in size, and consists of an I/O area, a data area, and a program area. The memory space includes areas intended for specific purposes such as general-purpose registers and a vector table. The memory maps of the MB95390H Series are shown below.

### ■ Memory Maps

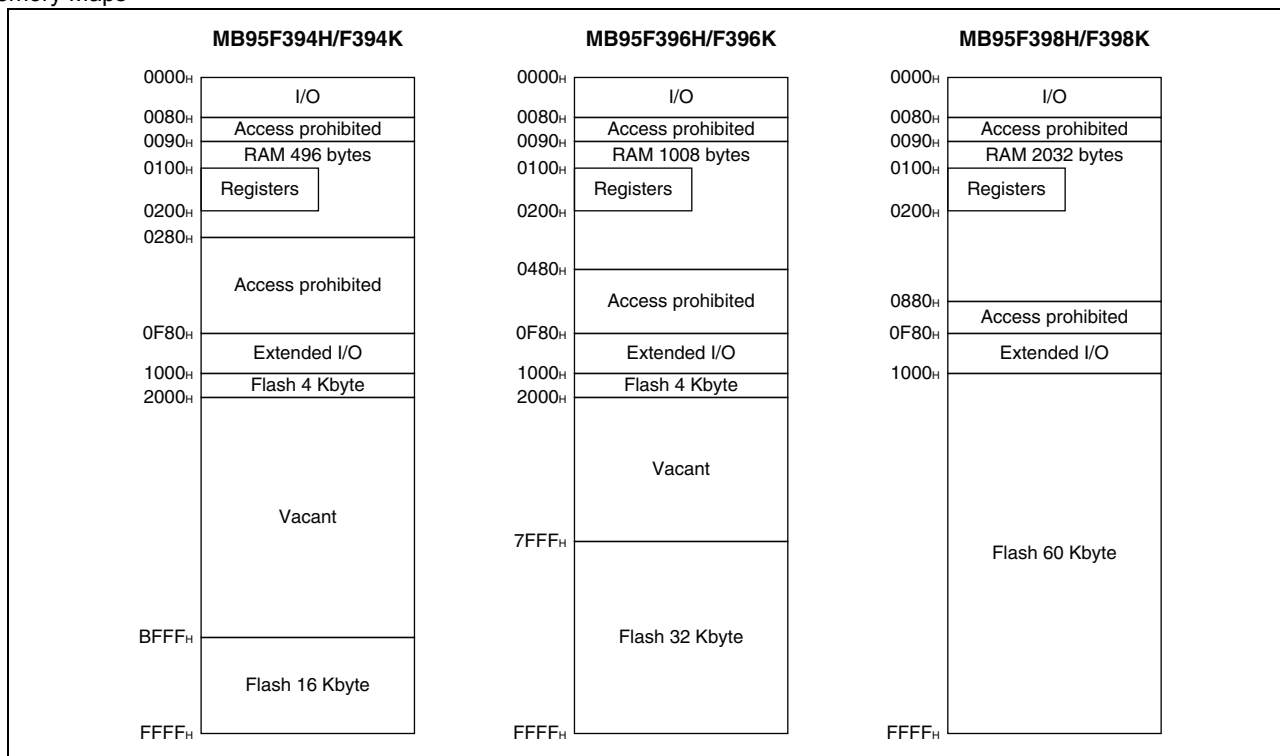

## 12. I/O Map

| Address                                      | Register abbreviation | Register name                                        | R/W | Initial value         |
|----------------------------------------------|-----------------------|------------------------------------------------------|-----|-----------------------|
| 0000 <sub>H</sub>                            | PDR0                  | Port 0 data register                                 | R/W | 00000000 <sub>B</sub> |
| 0001 <sub>H</sub>                            | DDR0                  | Port 0 direction register                            | R/W | 00000000 <sub>B</sub> |
| 0002 <sub>H</sub>                            | PDR1                  | Port 1 data register                                 | R/W | 00000000 <sub>B</sub> |
| 0003 <sub>H</sub>                            | DDR1                  | Port 1 direction register                            | R/W | 00000000 <sub>B</sub> |
| 0004 <sub>H</sub>                            | —                     | (Disabled)                                           | —   | —                     |
| 0005 <sub>H</sub>                            | WATR                  | Oscillation stabilization wait time setting register | R/W | 11111111 <sub>B</sub> |
| 0006 <sub>H</sub>                            | —                     | (Disabled)                                           | —   | —                     |
| 0007 <sub>H</sub>                            | SYCC                  | System clock control register                        | R/W | 0000X011 <sub>B</sub> |
| 0008 <sub>H</sub>                            | STBC                  | Standby control register                             | R/W | 00000XXX <sub>B</sub> |
| 0009 <sub>H</sub>                            | RSRR                  | Reset source register                                | R/W | XXXXXXXX <sub>B</sub> |
| 000A <sub>H</sub>                            | TBTC                  | Time-base timer control register                     | R/W | 00000000 <sub>B</sub> |
| 000B <sub>H</sub>                            | WPCR                  | Watch prescaler control register                     | R/W | 00000000 <sub>B</sub> |
| 000C <sub>H</sub>                            | WDTC                  | Watchdog timer control register                      | R/W | 00XX0000 <sub>B</sub> |
| 000D <sub>H</sub>                            | SYCC2                 | System clock control register 2                      | R/W | XX100011 <sub>B</sub> |
| 000E <sub>H</sub><br>to<br>0011 <sub>H</sub> | —                     | (Disabled)                                           | —   | —                     |
| 0012 <sub>H</sub>                            | PDR4                  | Port 4 data register                                 | R/W | 00000000 <sub>B</sub> |
| 0013 <sub>H</sub>                            | PDR4                  | Port 4 direction register                            | R/W | 00000000 <sub>B</sub> |
| 0014 <sub>H</sub> ,<br>0015 <sub>H</sub>     | —                     | (Disabled)                                           | —   | —                     |
| 0016 <sub>H</sub>                            | PDR6                  | Port 6 data register                                 | R/W | 00000000 <sub>B</sub> |
| 0017 <sub>H</sub>                            | DDR6                  | Port 6 direction register                            | R/W | 00000000 <sub>B</sub> |
| 0018 <sub>H</sub>                            | DDR7                  | Port 7 data register                                 | R/W | 00000000 <sub>B</sub> |
| 0019 <sub>H</sub>                            | DDR7                  | Port 7 direction register                            | R/W | 00000000 <sub>B</sub> |
| 001A <sub>H</sub><br>to<br>0027 <sub>H</sub> | —                     | (Disabled)                                           | —   | —                     |
| 0028 <sub>H</sub>                            | PDRF                  | Port F data register                                 | R/W | 00000000 <sub>B</sub> |
| 0029 <sub>H</sub>                            | DDRF                  | Port F direction register                            | R/W | 00000000 <sub>B</sub> |
| 002A <sub>H</sub>                            | PDRG                  | Port G data register                                 | R/W | 00000000 <sub>B</sub> |
| 002B <sub>H</sub>                            | DDRG                  | Port G direction register                            | R/W | 00000000 <sub>B</sub> |
| 002C <sub>H</sub>                            | PUL0                  | Port 0 pull-up register                              | R/W | 00000000 <sub>B</sub> |
| 002D <sub>H</sub>                            | PUL1                  | Port 1 pull-up register                              | R/W | 00000000 <sub>B</sub> |
| 002E <sub>H</sub> ,<br>002F <sub>H</sub>     | —                     | (Disabled)                                           | —   | —                     |
| 0030 <sub>H</sub>                            | PUL4                  | Port 4 pull-up register                              | R/W | 00000000 <sub>B</sub> |
| 0031 <sub>H</sub>                            | PUL6                  | Port 6 pull-up register                              | R/W | 00000000 <sub>B</sub> |
| 0032 <sub>H</sub>                            | PUL7                  | Port 7 pull-up register                              | R/W | 00000000 <sub>B</sub> |
| 0033 <sub>H</sub> ,<br>0034 <sub>H</sub>     | —                     | (Disabled)                                           | —   | —                     |
| 0035 <sub>H</sub>                            | PULG                  | Port G pull-up register                              | R/W | 00000000 <sub>B</sub> |

(Continued)

| Address                                      | Register abbreviation | Register name                                           | R/W | Initial value         |
|----------------------------------------------|-----------------------|---------------------------------------------------------|-----|-----------------------|
| 0036 <sub>H</sub>                            | T01CR1                | 8/16-bit composite timer 01 status control register 1   | R/W | 00000000 <sub>B</sub> |
| 0037 <sub>H</sub>                            | T00CR1                | 8/16-bit composite timer 00 status control register 1   | R/W | 00000000 <sub>B</sub> |
| 0038 <sub>H</sub>                            | T11CR1                | 8/16-bit composite timer 11 status control register 1   | R/W | 00000000 <sub>B</sub> |
| 0039 <sub>H</sub>                            | T10CR1                | 8/16-bit composite timer 10 status control register 1   | R/W | 00000000 <sub>B</sub> |
| 003A <sub>H</sub>                            | PC01                  | 8/16-bit PPG timer 01 control register                  | R/W | 00000000 <sub>B</sub> |
| 003B <sub>H</sub>                            | PC00                  | 8/16-bit PPG timer 00 control register                  | R/W | 00000000 <sub>B</sub> |
| 003C <sub>H</sub>                            | PC11                  | 8/16-bit PPG timer 11 control register                  | R/W | 00000000 <sub>B</sub> |
| 003D <sub>H</sub>                            | PC10                  | 8/16-bit PPG timer 10 control register                  | R/W | 00000000 <sub>B</sub> |
| 003E <sub>H</sub>                            | PC21                  | 8/16-bit PPG timer 21 control register                  | R/W | 00000000 <sub>B</sub> |
| 003F <sub>H</sub>                            | PC20                  | 8/16-bit PPG timer 20 control register                  | R/W | 00000000 <sub>B</sub> |
| 0040 <sub>H</sub>                            | TMCSRH1               | 16-bit reload timer control status register upper       | R/W | 00000000 <sub>B</sub> |
| 0041 <sub>H</sub>                            | TMCSRL1               | 16-bit reload timer control status register lower       | R/W | 00000000 <sub>B</sub> |
| 0042 <sub>H</sub> ,<br>0043 <sub>H</sub>     | —                     | (Disabled)                                              | —   | —                     |
| 0044 <sub>H</sub>                            | PCNTH1                | 16-bit PPG status control register upper                | R/W | 00000000 <sub>B</sub> |
| 0045 <sub>H</sub>                            | PCNTL1                | 16-bit PPG status control register lower                | R/W | 00000000 <sub>B</sub> |
| 0046 <sub>H</sub> ,<br>0047 <sub>H</sub>     | —                     | (Disabled)                                              | —   | —                     |
| 0048 <sub>H</sub>                            | EIC00                 | External interrupt circuit control register ch. 0/ch. 1 | R/W | 00000000 <sub>B</sub> |
| 0049 <sub>H</sub>                            | EIC10                 | External interrupt circuit control register ch. 2/ch. 3 | R/W | 00000000 <sub>B</sub> |
| 004A <sub>H</sub>                            | EIC20                 | External interrupt circuit control register ch. 4/ch. 5 | R/W | 00000000 <sub>B</sub> |
| 004B <sub>H</sub>                            | EIC30                 | External interrupt circuit control register ch. 6/ch. 7 | R/W | 00000000 <sub>B</sub> |
| 004C <sub>H</sub><br>to<br>004F <sub>H</sub> | —                     | (Disabled)                                              | —   | —                     |
| 0050 <sub>H</sub>                            | SCR                   | LIN-UART serial control register                        | R/W | 00000000 <sub>B</sub> |
| 0051 <sub>H</sub>                            | SMR                   | LIN-UART serial mode register                           | R/W | 00000000 <sub>B</sub> |
| 0052 <sub>H</sub>                            | SSR                   | LIN-UART serial status register                         | R/W | 00001000 <sub>B</sub> |
| 0053 <sub>H</sub>                            | RDR/TDR               | LIN-UART receive/transmit data register                 | R/W | 00000000 <sub>B</sub> |
| 0054 <sub>H</sub>                            | ESCR                  | LIN-UART extended status control register               | R/W | 00000100 <sub>B</sub> |
| 0055 <sub>H</sub>                            | ECCR                  | LIN-UART extended communication control register        | R/W | 000000XX <sub>B</sub> |
| 0056 <sub>H</sub>                            | SMC10                 | UART/SIO serial mode control register 1                 | R/W | 00000000 <sub>B</sub> |
| 0057 <sub>H</sub>                            | SMC20                 | UART/SIO serial mode control register 2                 | R/W | 00100000 <sub>B</sub> |
| 0058 <sub>H</sub>                            | SSR0                  | UART/SIO serial status and data register                | R/W | 00000001 <sub>B</sub> |
| 0059 <sub>H</sub>                            | TDR0                  | UART/SIO serial output data register                    | R/W | 00000000 <sub>B</sub> |
| 005A <sub>H</sub>                            | RDR0                  | UART/SIO serial input data register                     | R   | 00000000 <sub>B</sub> |
| 005B <sub>H</sub><br>to<br>005F <sub>H</sub> | —                     | (Disabled)                                              | —   | —                     |

(Continued)

| Address           | Register abbreviation | Register name                                                               | R/W | Initial value         |
|-------------------|-----------------------|-----------------------------------------------------------------------------|-----|-----------------------|
| 0060 <sub>H</sub> | IBCR00                | I <sup>2</sup> C bus control register 0                                     | R/W | 00000000 <sub>B</sub> |
| 0061 <sub>H</sub> | IBCR10                | I <sup>2</sup> C bus control register 1                                     | R/W | 00000000 <sub>B</sub> |
| 0062 <sub>H</sub> | IBCR0                 | I <sup>2</sup> C bus status register                                        | R/W | 00000000 <sub>B</sub> |
| 0063 <sub>H</sub> | IDDR0                 | I <sup>2</sup> C data register                                              | R/W | 00000000 <sub>B</sub> |
| 0064 <sub>H</sub> | IAAR0                 | I <sup>2</sup> C address register                                           | R/W | 00000000 <sub>B</sub> |
| 0065 <sub>H</sub> | ICCR0                 | I <sup>2</sup> C clock control register                                     | R/W | 00000000 <sub>B</sub> |
| 0066 <sub>H</sub> | OPCUR                 | Output control register (upper)                                             | R/W | 00000000 <sub>B</sub> |
| 0067 <sub>H</sub> | OPCLR                 | Output control register (lower)                                             | R/W | 00000000 <sub>B</sub> |
| 0068 <sub>H</sub> | IPCUR                 | Input control register (upper)                                              | R/W | 00000000 <sub>B</sub> |
| 0069 <sub>H</sub> | IPCLR                 | Input control register (lower)                                              | R/W | 00000000 <sub>B</sub> |
| 006A <sub>H</sub> | NCCR                  | Noise cancellation control register                                         | R/W | 00000000 <sub>B</sub> |
| 006B <sub>H</sub> | TCSR                  | Timer control status register                                               | R/W | 00000000 <sub>B</sub> |
| 006C <sub>H</sub> | ADC1                  | 8/10-bit A/D converter control register 1                                   | R/W | 00000000 <sub>B</sub> |
| 006D <sub>H</sub> | ADC2                  | 8/10-bit A/D converter control register 2                                   | R/W | 00000000 <sub>B</sub> |
| 006E <sub>H</sub> | ADDH                  | 8/10-bit A/D converter data register (upper)                                | R/W | 00000000 <sub>B</sub> |
| 006F <sub>H</sub> | ADDL                  | 8/10-bit A/D converter data register (lower)                                | R/W | 00000000 <sub>B</sub> |
| 0070 <sub>H</sub> | —                     | (Disabled)                                                                  | —   | —                     |
| 0071 <sub>H</sub> | FSR2                  | Flash memory status register 2                                              | R/W | 00000000 <sub>B</sub> |
| 0072 <sub>H</sub> | FSR                   | Flash memory status register                                                | R/W | 000X0000 <sub>B</sub> |
| 0073 <sub>H</sub> | SWRE0                 | Flash memory sector write control register 0                                | R/W | 00000000 <sub>B</sub> |
| 0074 <sub>H</sub> | FSR3                  | Flash memory status register 3                                              | R   | 00000000 <sub>B</sub> |
| 0075 <sub>H</sub> | —                     | (Disabled)                                                                  | —   | —                     |
| 0076 <sub>H</sub> | WREN                  | Wild register address compare enable register                               | R/W | 00000000 <sub>B</sub> |
| 0077 <sub>H</sub> | WROR                  | Wild register data test setting register                                    | R/W | 00000000 <sub>B</sub> |
| 0078 <sub>H</sub> | —                     | Mirror of register bank pointer (RP) and mirror of direct bank pointer (DP) | —   | —                     |
| 0079 <sub>H</sub> | ILR0                  | Interrupt level setting register 0                                          | R/W | 11111111 <sub>B</sub> |
| 007A <sub>H</sub> | ILR1                  | Interrupt level setting register 1                                          | R/W | 11111111 <sub>B</sub> |
| 007B <sub>H</sub> | ILR2                  | Interrupt level setting register 2                                          | R/W | 11111111 <sub>B</sub> |
| 007C <sub>H</sub> | ILR3                  | Interrupt level setting register 3                                          | R/W | 11111111 <sub>B</sub> |
| 007D <sub>H</sub> | ILR4                  | Interrupt level setting register 4                                          | R/W | 11111111 <sub>B</sub> |
| 007E <sub>H</sub> | ILR5                  | Interrupt level setting register 5                                          | R/W | 11111111 <sub>B</sub> |
| 007F <sub>H</sub> | —                     | (Disabled)                                                                  | —   | —                     |
| 0F80 <sub>H</sub> | WRARH0                | Wild register address setting register (upper) ch. 0                        | R/W | 00000000 <sub>B</sub> |
| 0F81 <sub>H</sub> | WRARL0                | Wild register address setting register (lower) ch. 0                        | R/W | 00000000 <sub>B</sub> |
| 0F82 <sub>H</sub> | WRDR0                 | Wild register data setting register ch. 0                                   | R/W | 00000000 <sub>B</sub> |

*(Continued)*

| Address                                      | Register abbreviation | Register name                                              | R/W | Initial value         |
|----------------------------------------------|-----------------------|------------------------------------------------------------|-----|-----------------------|
| 0F83 <sub>H</sub>                            | WRARH1                | Wild register address setting register (upper) ch. 1       | R/W | 00000000 <sub>B</sub> |
| 0F84 <sub>H</sub>                            | WRARL1                | Wild register address setting register (lower) ch. 1       | R/W | 00000000 <sub>B</sub> |
| 0F85 <sub>H</sub>                            | WRDR1                 | Wild register data setting register ch. 1                  | R/W | 00000000 <sub>B</sub> |
| 0F86 <sub>H</sub>                            | WRARH2                | Wild register address setting register (upper) ch. 2       | R/W | 00000000 <sub>B</sub> |
| 0F87 <sub>H</sub>                            | WRARL2                | Wild register address setting register (lower) ch. 2       | R/W | 00000000 <sub>B</sub> |
| 0F88 <sub>H</sub>                            | WRDR2                 | Wild register data setting register ch. 2                  | R/W | 00000000 <sub>B</sub> |
| 0F89 <sub>H</sub><br>to<br>0F91 <sub>H</sub> | —                     | (Disabled)                                                 | —   | —                     |
| 0F92 <sub>H</sub>                            | T01CR0                | 8/16-bit composite timer 01 status control register 0      | R/W | 00000000 <sub>B</sub> |
| 0F93 <sub>H</sub>                            | T00CR0                | 8/16-bit composite timer 00 status control register 0      | R/W | 00000000 <sub>B</sub> |
| 0F94 <sub>H</sub>                            | T01DR                 | 8/16-bit composite timer 01 data register                  | R/W | 00000000 <sub>B</sub> |
| 0F95 <sub>H</sub>                            | T00DR                 | 8/16-bit composite timer 00 data register                  | R/W | 00000000 <sub>B</sub> |
| 0F96 <sub>H</sub>                            | TMCR0                 | 8/16-bit composite timer 00/01 timer mode control register | R/W | 00000000 <sub>B</sub> |
| 0F97 <sub>H</sub>                            | T11CR0                | 8/16-bit composite timer 11 status control register 0      | R/W | 00000000 <sub>B</sub> |
| 0F98 <sub>H</sub>                            | T10CR0                | 8/16-bit composite timer 10 status control register 0      | R/W | 00000000 <sub>B</sub> |
| 0F99 <sub>H</sub>                            | T11DR                 | 8/16-bit composite timer 11 data register                  | R/W | 00000000 <sub>B</sub> |
| 0F9A <sub>H</sub>                            | T10DR                 | 8/16-bit composite timer 10 data register                  | R/W | 00000000 <sub>B</sub> |
| 0F9B <sub>H</sub>                            | TMCR1                 | 8/16-bit composite timer 10/11 timer mode control register | R/W | 00000000 <sub>B</sub> |
| 0F9C <sub>H</sub>                            | PPS01                 | 8/16-bit PPG01 cycle setting buffer register               | R/W | 11111111 <sub>B</sub> |
| 0F9D <sub>H</sub>                            | PPS00                 | 8/16-bit PPG00 cycle setting buffer register               | R/W | 11111111 <sub>B</sub> |
| 0F9E <sub>H</sub>                            | PDS01                 | 8/16-bit PPG01 duty setting buffer register                | R/W | 11111111 <sub>B</sub> |
| 0F9F <sub>H</sub>                            | PDS00                 | 8/16-bit PPG00 duty setting buffer register                | R/W | 11111111 <sub>B</sub> |
| 0FA0 <sub>H</sub>                            | PPS11                 | 8/16-bit PPG11 cycle setting buffer register               | R/W | 11111111 <sub>B</sub> |
| 0FA1 <sub>H</sub>                            | PPS10                 | 8/16-bit PPG10 cycle setting buffer register               | R/W | 11111111 <sub>B</sub> |
| 0FA2 <sub>H</sub>                            | PDS11                 | 8/16-bit PPG11 duty setting buffer register                | R/W | 11111111 <sub>B</sub> |
| 0FA3 <sub>H</sub>                            | PDS10                 | 8/16-bit PPG10 duty setting buffer register                | R/W | 11111111 <sub>B</sub> |
| 0FA4 <sub>H</sub>                            | PPGS                  | 8/16-bit PPG startup register                              | R/W | 00000000 <sub>B</sub> |
| 0FA5 <sub>H</sub>                            | REVC                  | 8/16-bit PPG output reverse register                       | R/W | 00000000 <sub>B</sub> |
| 0FA6 <sub>H</sub>                            | PPS21                 | 8/16-bit PPG21 cycle setting buffer register               | R/W | 11111111 <sub>B</sub> |
| 0FA7 <sub>H</sub>                            | PPS20                 | 8/16-bit PPG20 cycle setting buffer register               | R/W | 11111111 <sub>B</sub> |
| 0FA8 <sub>H</sub>                            | TMRH1                 | 16-bit reload timer timer register (upper)                 | R/W | 00000000 <sub>B</sub> |
|                                              | TMRLRH1               | 16-bit reload timer reload register (upper)                |     |                       |
| 0FA9 <sub>H</sub>                            | TMRL1                 | 16-bit reload timer timer register (lower)                 | R/W | 00000000 <sub>B</sub> |
|                                              | TMRLRL1               | 16-bit reload timer reload register (lower)                |     |                       |
| 0FAA <sub>H</sub>                            | PDS21                 | 8/16-bit PPG21 duty setting buffer register                | R/W | 11111111 <sub>B</sub> |
| 0FAB <sub>H</sub>                            | PDS20                 | 8/16-bit PPG20 duty setting buffer register                | R/W | 11111111 <sub>B</sub> |

*(Continued)*

| Address                                      | Register abbreviation | Register name                                    | R/W | Initial value         |
|----------------------------------------------|-----------------------|--------------------------------------------------|-----|-----------------------|
| 0FAC <sub>H</sub><br>to<br>0FAF <sub>H</sub> | —                     | (Disabled)                                       | —   | —                     |
| 0FB0 <sub>H</sub>                            | PDCRH1                | 16-bit PPG down counter register (upper)         | R   | 00000000 <sub>B</sub> |
| 0FB1 <sub>H</sub>                            | PDCRL1                | 16-bit PPG down counter register (lower)         | R   | 00000000 <sub>B</sub> |
| 0FB2 <sub>H</sub>                            | PCSRH1                | 16-bit PPG cycle setting buffer register (upper) | R/W | 11111111 <sub>B</sub> |
| 0FB3 <sub>H</sub>                            | PC SRL1               | 16-bit PPG cycle setting buffer register (lower) | R/W | 11111111 <sub>B</sub> |
| 0FB4 <sub>H</sub>                            | PDUTH1                | 16-bit PPG duty setting buffer register (upper)  | R/W | 11111111 <sub>B</sub> |
| 0FB5 <sub>H</sub>                            | PDUTL1                | 16-bit PPG duty setting buffer register (lower)  | R/W | 11111111 <sub>B</sub> |
| 0FB6 <sub>H</sub><br>to<br>0FBB <sub>H</sub> | —                     | (Disabled)                                       | —   | —                     |
| 0FBC <sub>H</sub>                            | BGR1                  | LIN-UART baud rate generator register 1          | R/W | 00000000 <sub>B</sub> |
| 0FBD <sub>H</sub>                            | BGR0                  | LIN-UART baud rate generator register 0          | R/W | 00000000 <sub>B</sub> |
| 0FBE <sub>H</sub>                            | PSSR0                 | UART/SIO prescaler select register               | R/W | 00000000 <sub>B</sub> |
| 0FBF <sub>H</sub>                            | BRSR0                 | UART/SIO baud rate setting register              | R/W | 00000000 <sub>B</sub> |
| 0FC0 <sub>H</sub> ,<br>0FC1 <sub>H</sub>     | —                     | (Disabled)                                       | —   | —                     |
| 0FC2 <sub>H</sub>                            | AIDRH                 | A/D input disable register (upper)               | R/W | 00000000 <sub>B</sub> |
| 0FC3 <sub>H</sub>                            | AIDRL                 | A/D input disable register (lower)               | R/W | 00000000 <sub>B</sub> |
| 0FC4 <sub>H</sub>                            | OPDBRH0               | Output data buffer register (upper) ch. 0        | R/W | 00000000 <sub>B</sub> |
| 0FC5 <sub>H</sub>                            | OPDBRL0               | Output data buffer register (lower) ch. 0        | R/W | 00000000 <sub>B</sub> |
| 0FC6 <sub>H</sub>                            | OPDBRH1               | Output data buffer register (upper) ch. 1        | R/W | 00000000 <sub>B</sub> |
| 0FC7 <sub>H</sub>                            | OPDBRL1               | Output data buffer register (lower) ch. 1        | R/W | 00000000 <sub>B</sub> |
| 0FC8 <sub>H</sub>                            | OPDBRH2               | Output data buffer register (upper) ch. 2        | R/W | 00000000 <sub>B</sub> |
| 0FC9 <sub>H</sub>                            | OPDBRL2               | Output data buffer register (lower) ch. 2        | R/W | 00000000 <sub>B</sub> |
| 0FCA <sub>H</sub>                            | OPDBRH3               | Output data buffer register (upper) ch. 3        | R/W | 00000000 <sub>B</sub> |
| 0FCB <sub>H</sub>                            | OPDBRL3               | Output data buffer register (lower) ch. 3        | R/W | 00000000 <sub>B</sub> |
| 0FCC <sub>H</sub>                            | OPDBRH4               | Output data buffer register (upper) ch. 4        | R/W | 00000000 <sub>B</sub> |
| 0FCD <sub>H</sub>                            | OPDBRL4               | Output data buffer register (lower) ch. 4        | R/W | 00000000 <sub>B</sub> |
| 0FCE <sub>H</sub>                            | OPDBRH5               | Output data buffer register (upper) ch. 5        | R/W | 00000000 <sub>B</sub> |
| 0FCF <sub>H</sub>                            | OPDBRL5               | Output data buffer register (lower) ch. 5        | R/W | 00000000 <sub>B</sub> |
| 0FD0 <sub>H</sub>                            | OPDBRH6               | Output data buffer register (upper) ch. 6        | R/W | 00000000 <sub>B</sub> |
| 0FD1 <sub>H</sub>                            | OPDBRL6               | Output data buffer register (lower) ch. 6        | R/W | 00000000 <sub>B</sub> |
| 0FD2 <sub>H</sub>                            | OPDBRH7               | Output data buffer register (upper) ch. 7        | R/W | 00000000 <sub>B</sub> |
| 0FD3 <sub>H</sub>                            | OPDBRL7               | Output data buffer register (lower) ch. 7        | R/W | 00000000 <sub>B</sub> |
| 0FD4 <sub>H</sub>                            | OPDBRH8               | Output data buffer register (upper) ch. 8        | R/W | 00000000 <sub>B</sub> |
| 0FD5 <sub>H</sub>                            | OPDBRL8               | Output data buffer register (lower) ch. 8        | R/W | 00000000 <sub>B</sub> |
| 0FD6 <sub>H</sub>                            | OPDBRH9               | Output data buffer register (upper) ch. 9        | R/W | 00000000 <sub>B</sub> |
| 0FD7 <sub>H</sub>                            | OPDBRL9               | Output data buffer register (lower) ch. 9        | R/W | 00000000 <sub>B</sub> |
| 0FD8 <sub>H</sub>                            | OPDBRHA               | Output data buffer register (upper) ch. A        | R/W | 00000000 <sub>B</sub> |
| 0FD9 <sub>H</sub>                            | OPDBRLA               | Output data buffer register (lower) ch. A        | R/W | 00000000 <sub>B</sub> |

*(Continued)*

(Continued)

| Address                                      | Register abbreviation | Register name                                | R/W | Initial value           |
|----------------------------------------------|-----------------------|----------------------------------------------|-----|-------------------------|
| 0FDA <sub>H</sub>                            | OPDBRHB               | Output data buffer register (upper) ch. B    | R/W | 00000000 <sub>B</sub>   |
| 0FDB <sub>H</sub>                            | OPDBRLB               | Output data buffer register (lower) ch. B    | R/W | 00000000 <sub>B</sub>   |
| 0FDC <sub>H</sub>                            | OPDUR                 | Output data register (upper)                 | R   | 0000XXXX <sub>B</sub>   |
| 0FDD <sub>H</sub>                            | OPDLR                 | Output data register (lower)                 | R   | XXXXXXXX <sub>B</sub>   |
| 0FDE <sub>H</sub>                            | CPCUR                 | Compare clear register (upper)               | R/W | XXXXXXXX <sub>B</sub>   |
| 0FDF <sub>H</sub>                            | CPCLR                 | Compare clear register (lower)               | R/W | XXXXXXXX <sub>B</sub>   |
| 0FE0 <sub>H</sub> ,<br>0FE1 <sub>H</sub>     | —                     | (Disabled)                                   | —   | —                       |
| 0FE2 <sub>H</sub>                            | TMBUR                 | Timer buffer register (upper)                | R   | XXXXXXXX <sub>B</sub>   |
| 0FE3 <sub>H</sub>                            | TMBLR                 | Timer buffer register (lower)                | R   | XXXXXXXX <sub>B</sub>   |
| 0FE4 <sub>H</sub>                            | CRTH                  | Main CR clock trimming register (upper)      | R/W | 0XXXXXXXX <sub>B</sub>  |
| 0FE5 <sub>H</sub>                            | CRTL                  | Main CR clock trimming register (lower)      | R/W | 00XXXXXXXX <sub>B</sub> |
| 0FE6 <sub>H</sub> ,<br>0FE7 <sub>H</sub>     | —                     | (Disabled)                                   | —   | —                       |
| 0FE8 <sub>H</sub>                            | SYSC                  | System configuration register                | R/W | 11000011 <sub>B</sub>   |
| 0FE9 <sub>H</sub>                            | CMCR                  | Clock monitoring control register            | R/W | 00000000 <sub>B</sub>   |
| 0FEA <sub>H</sub>                            | CMDR                  | Clock monitoring data register               | R   | 00000000 <sub>B</sub>   |
| 0FEB <sub>H</sub>                            | WDTH                  | Watchdog timer selection ID register (upper) | R   | XXXXXXXX <sub>B</sub>   |
| 0FEC <sub>H</sub>                            | WDTL                  | Watchdog timer selection ID register (lower) | R   | XXXXXXXX <sub>B</sub>   |
| 0FED <sub>H</sub>                            | —                     | (Disabled)                                   | —   | —                       |
| 0FEE <sub>H</sub>                            | ILSR                  | Input level select register                  | R/W | 00000000 <sub>B</sub>   |
| 0FEF <sub>H</sub>                            | WICR                  | Interrupt pin control register               | R/W | 01000000 <sub>B</sub>   |
| 0FF0 <sub>H</sub><br>to<br>0FFF <sub>H</sub> | —                     | (Disabled)                                   | —   | —                       |

■ R/W access symbols

R/W : Readable / Writable

R : Read only

W : Write only

■ Initial value symbols

0 : The initial value of this bit is "0".

1 : The initial value of this bit is "1".

X : The initial value of this bit is indeterminate.

**Note:** Do not write to an address that is "(Disabled)". If a "(Disabled)" address is read, an indeterminate value is returned.

### 13. Interrupt Source Table

| Interrupt source                                                              | Interrupt request number | Vector table address |                   | Bit name of interrupt level setting register | Priority order of interrupt sources of the same level (occurring simultaneously) |
|-------------------------------------------------------------------------------|--------------------------|----------------------|-------------------|----------------------------------------------|----------------------------------------------------------------------------------|
|                                                                               |                          | Upper                | Lower             |                                              |                                                                                  |
| External interrupt ch. 0, ch. 4                                               | IRQ00                    | FFFA <sub>H</sub>    | FFFB <sub>H</sub> | L00 [1:0]                                    | <div>High</div> <div>↑</div> <div>↓</div> <div>Low</div>                         |
| External interrupt ch. 1, ch. 5                                               | IRQ01                    | FFF8 <sub>H</sub>    | FFF9 <sub>H</sub> | L01 [1:0]                                    |                                                                                  |
| External interrupt ch. 2, ch. 6                                               | IRQ02                    | FFF6 <sub>H</sub>    | FFF7 <sub>H</sub> | L02 [1:0]                                    |                                                                                  |
| External interrupt ch. 3, ch. 7                                               | IRQ03                    | FFF4 <sub>H</sub>    | FFF5 <sub>H</sub> | L03 [1:0]                                    |                                                                                  |
| UART/SIO ch. 0, MPG (DTTI)                                                    | IRQ04                    | FFF2 <sub>H</sub>    | FFF3 <sub>H</sub> | L04 [1:0]                                    |                                                                                  |
| 8/16-bit composite timer ch. 0 (lower)                                        | IRQ05                    | FFF0 <sub>H</sub>    | FFF1 <sub>H</sub> | L05 [1:0]                                    |                                                                                  |
| 8/16-bit composite timer ch. 0 (upper)                                        | IRQ06                    | FFEE <sub>H</sub>    | FFEF <sub>H</sub> | L06 [1:0]                                    |                                                                                  |
| LIN-UART (reception)                                                          | IRQ07                    | FFEC <sub>H</sub>    | FFED <sub>H</sub> | L07 [1:0]                                    |                                                                                  |
| LIN-UART (transmission)                                                       | IRQ08                    | FFEA <sub>H</sub>    | FFEB <sub>H</sub> | L08 [1:0]                                    |                                                                                  |
| 8/16-bit PPG ch. 1 (lower)                                                    | IRQ09                    | FFE8 <sub>H</sub>    | FFE9 <sub>H</sub> | L09 [1:0]                                    |                                                                                  |
| 8/16-bit PPG ch. 1 (upper)                                                    | IRQ10                    | FFE6 <sub>H</sub>    | FFE7 <sub>H</sub> | L10 [1:0]                                    |                                                                                  |
| 8/16-bit PPG ch. 2 (upper)                                                    | IRQ11                    | FFE4 <sub>H</sub>    | FFE5 <sub>H</sub> | L11 [1:0]                                    |                                                                                  |
| 8/16-bit PPG ch. 0 (upper)                                                    | IRQ12                    | FFE2 <sub>H</sub>    | FFE3 <sub>H</sub> | L12 [1:0]                                    |                                                                                  |
| 8/16-bit PPG ch. 0 (lower)                                                    | IRQ13                    | FFE0 <sub>H</sub>    | FFE1 <sub>H</sub> | L13 [1:0]                                    |                                                                                  |
| 8/16-bit composite timer ch. 1 (upper)                                        | IRQ14                    | FFDE <sub>H</sub>    | FFDF <sub>H</sub> | L14 [1:0]                                    |                                                                                  |
| 8/16-bit PPG ch. 2 (lower)                                                    | IRQ15                    | FFDC <sub>H</sub>    | FFDD <sub>H</sub> | L15 [1:0]                                    |                                                                                  |
| 16-bit reload timer ch. 1, MPG (write timing/compare clear), I <sup>2</sup> C | IRQ16                    | FFDA <sub>H</sub>    | FFDB <sub>H</sub> | L16 [1:0]                                    |                                                                                  |
| 16-bit PPG timer ch. 1, MPG (position detection/compare match)                | IRQ17                    | FFD8 <sub>H</sub>    | FFD9 <sub>H</sub> | L17 [1:0]                                    |                                                                                  |
| 8/10-bit A/D converter                                                        | IRQ18                    | FFD6 <sub>H</sub>    | FFD7 <sub>H</sub> | L18 [1:0]                                    |                                                                                  |
| Time-base timer                                                               | IRQ19                    | FFD4 <sub>H</sub>    | FFD5 <sub>H</sub> | L19 [1:0]                                    |                                                                                  |
| Watch prescaler                                                               | IRQ20                    | FFD2 <sub>H</sub>    | FFD3 <sub>H</sub> | L20 [1:0]                                    |                                                                                  |
| —                                                                             | IRQ21                    | FFD0 <sub>H</sub>    | FFD1 <sub>H</sub> | L21 [1:0]                                    |                                                                                  |
| 8/16-bit composite timer ch. 1 (lower)                                        | IRQ22                    | FFCE <sub>H</sub>    | FFCF <sub>H</sub> | L22 [1:0]                                    |                                                                                  |
| Flash memory                                                                  | IRQ23                    | FFCC <sub>H</sub>    | FFCD <sub>H</sub> | L23 [1:0]                                    |                                                                                  |

## 14. Electrical Characteristics

### 14.1 Absolute Maximum Ratings

| Parameter                              | Symbol              | Rating         |              | Unit | Remarks                                                                                                                    |
|----------------------------------------|---------------------|----------------|--------------|------|----------------------------------------------------------------------------------------------------------------------------|
|                                        |                     | Min            | Max          |      |                                                                                                                            |
| Power supply voltage* <sup>1</sup>     | $V_{CC}$            | $V_{SS} - 0.3$ | $V_{SS} + 6$ | V    |                                                                                                                            |
| Input voltage* <sup>1</sup>            | $V_I$               | $V_{SS} - 0.3$ | $V_{SS} + 6$ | V    | *2                                                                                                                         |
| Output voltage* <sup>1</sup>           | $V_O$               | $V_{SS} - 0.3$ | $V_{SS} + 6$ | V    | *2                                                                                                                         |
| Maximum clamp current                  | $I_{CLAMP}$         | -2             | +2           | mA   | Applicable to specific pins* <sup>3</sup>                                                                                  |
| Total maximum clamp current            | $\Sigma I_{CLAMP} $ | —              | 20           | mA   | Applicable to specific pins* <sup>3</sup>                                                                                  |
| “L” level maximum output current       | $I_{OL1}$           | —              | 15           | mA   | Other than P62 to P67                                                                                                      |
|                                        | $I_{OL2}$           | —              | 15           |      | P62 to P67                                                                                                                 |
| “L” level average current              | $I_{OLAV1}$         | —              | 4            | mA   | Other than P62 to P67<br>Average output current =<br>operating current × operating ratio<br>(1 pin)                        |
|                                        | $I_{OLAV2}$         | —              | 12           |      | P62 to P67<br>Average output current =<br>operating current × operating ratio<br>(1 pin)                                   |
| “L” level total maximum output current | $\Sigma I_{OL}$     | —              | 100          | mA   |                                                                                                                            |
| “L” level total average output current | $\Sigma I_{OLAV}$   | —              | 50           | mA   | Total average output current =<br>operating current × operating ratio<br>(Total number of pins)                            |
| “H” level maximum output current       | $I_{OH1}$           | —              | -15          | mA   | Other than P12, P62 to P67, P72, P73 and PF2                                                                               |
|                                        | $I_{OH2}$           | —              | -15          |      | P12, P62 to P67, P72, P73 and PF2                                                                                          |
| “H” level average current              | $I_{OHAV1}$         | —              | -4           | mA   | Other than P12, P62 to P67, P72, P73 and PF2<br>Average output current =<br>operating current × operating ratio<br>(1 pin) |
|                                        | $I_{OHAV2}$         | —              | -8           |      | P12, P62 to P67, P72, P73 and PF2<br>Average output current =<br>operating current × operating ratio<br>(1 pin)            |
| “H” level total maximum output current | $\Sigma I_{OH}$     | —              | -100         | mA   |                                                                                                                            |
| “H” level total average output current | $\Sigma I_{OHAV}$   | —              | -50          | mA   | Total average output current =<br>operating current × operating ratio<br>(Total number of pins)                            |
| Power consumption                      | $P_d$               | —              | 320          | mW   |                                                                                                                            |
| Operating temperature                  | $T_A$               | -40            | +85          | °C   |                                                                                                                            |
| Storage temperature                    | $T_{stg}$           | -55            | +150         | °C   |                                                                                                                            |

(Continued)

(Continued)


\*1: The parameter is based on  $V_{SS} = 0.0\text{ V}$ .

\*2:  $V_I$  and  $V_O$  must not exceed  $V_{CC} + 0.3\text{ V}$ .  $V_I$  must not exceed the rated voltage. However, if the maximum current to/from an input is limited by means of an external component, the  $I_{CLAMP}$  rating is used instead of the  $V_I$  rating.

\*3: Applicable to the following pins: P00 to P07, P10, P11, P13 to P17, P40 to P47, P60 to P67, P70, P71, P74 to P77, PF0, PF1, PG1 and PG2

- Use under recommended operating conditions.
- Use with DC voltage (current).
- The HV (High Voltage) signal is an input signal exceeding the  $V_{CC}$  voltage. Always connect a limiting resistor between the HV (High Voltage) signal and the microcontroller before applying the HV (High Voltage) signal.
- The value of the limiting resistor should be set to a value at which the current to be input to the microcontroller pin when the HV (High Voltage) signal is input is below the standard value, irrespective of whether the current is transient current or stationary current.
- When the microcontroller drive current is low, such as in low power consumption modes, the HV (High Voltage) input potential may pass through the protective diode to increase the potential of the  $V_{CC}$  pin, affecting other devices.
- If the HV (High Voltage) signal is input when the microcontroller power supply is off (not fixed at 0 V), since power is supplied from the pins, incomplete operations may be executed.
- If the HV (High Voltage) input is input after power-on, since power is supplied from the pins, the voltage of power supply may not be sufficient to enable a power-on reset.
- Do not leave the HV (High Voltage) input pin unconnected.
- Example of a recommended circuit

- Input/Output equivalent circuit

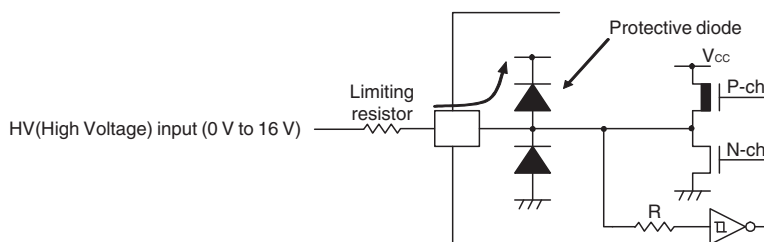

**WARNING:** Semiconductor devices can be permanently damaged by application of stress (voltage, current, temperature, etc.) in excess of absolute maximum ratings. Do not exceed these ratings.

## 14.2 Recommended Operating Conditions

 (V<sub>SS</sub> = 0.0 V)


| Parameter             | Symbol          | Value   |       | Unit | Remarks                       |                               |
|-----------------------|-----------------|---------|-------|------|-------------------------------|-------------------------------|
|                       |                 | Min     | Max   |      |                               |                               |
| Power supply voltage  | V <sub>CC</sub> | 2.4*1*2 | 5.5*1 | V    | In normal operation           | Other than on-chip debug mode |
|                       |                 | 2.3     | 5.5   |      | Hold condition in stop mode   |                               |
|                       |                 | 2.9     | 5.5   |      | In normal operation           | On-chip debug mode            |
|                       |                 | 2.3     | 5.5   |      | Hold condition in stop mode   |                               |
| Smoothing capacitor   | C <sub>S</sub>  | 0.022   | 1     | μF   | *3                            |                               |
| Operating temperature | T <sub>A</sub>  | −40     | +85   | °C   | Other than on-chip debug mode |                               |
|                       |                 | +5      | +35   |      | On-chip debug mode            |                               |

\*1: The value varies depending on the operating frequency, the machine clock and the analog guaranteed range.

\*2: This value becomes 2.88 V when the low-voltage detection reset is used.

\*3: Use a ceramic capacitor or a capacitor with equivalent frequency characteristics. The bypass capacitor for the V<sub>CC</sub> pin must have a capacitance larger than C<sub>S</sub>. For the connection to a smoothing capacitor C<sub>S</sub>, see the diagram below. To prevent the device from unintentionally entering an unknown mode due to noise, minimize the distance between the C pin and C<sub>S</sub> and the distance between C<sub>S</sub> and the V<sub>SS</sub> pin when designing the layout of a printed circuit board.

### • DBG / $\overline{\text{RST}}$ / C pins connection diagram

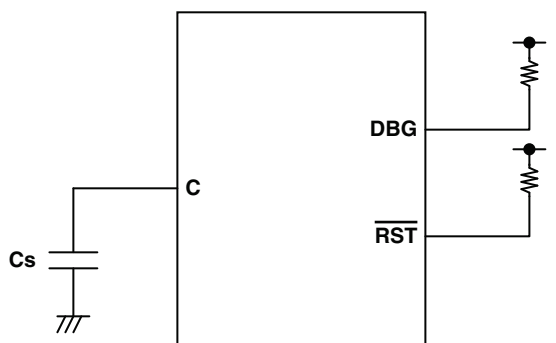

\*: Since the DBG pin becomes a communication pin in on-chip debug mode, set a pull-up resistor value suiting the input/output specifications of P12/DBG.

**WARNING:** The recommended operating conditions are required in order to ensure the normal operation of the semiconductor device. All of the device's electrical characteristics are warranted when the device is operated within these ranges.

Always use semiconductor devices within their recommended operating condition ranges. Operation outside these ranges may adversely affect reliability and could result in device failure. No warranty is made with respect to uses, operating conditions, or combinations not represented on the data sheet. Users considering application outside the listed conditions are advised to contact their representatives beforehand.

**14.3 DC Characteristics**
 $(V_{CC} = 5.0 V \pm 10\%, V_{SS} = 0.0 V, T_A = -40^\circ C \text{ to } +85^\circ C)$ 

| Parameter                                     | Symbol     | Pin name                                                                               | Condition                | Value          |                   |                | Unit      | Remarks                                              |
|-----------------------------------------------|------------|----------------------------------------------------------------------------------------|--------------------------|----------------|-------------------|----------------|-----------|------------------------------------------------------|
|                                               |            |                                                                                        |                          | Min            | Typ <sup>*3</sup> | Max            |           |                                                      |
| "H" level input voltage                       | $V_{IH1}$  | P47, P72, P73, P77                                                                     | *1                       | $0.7 V_{CC}$   | —                 | $V_{CC} + 0.3$ | V         | When CMOS input level (hysteresis input) is selected |
|                                               | $V_{IHS}$  | P00 to P07, P10 to P17, P40 to P47, P60 to P67, P70 to P77, PF0, PF1, PG1, PG2         | *1                       | $0.8 V_{CC}$   | —                 | $V_{CC} + 0.3$ | V         | Hysteresis input                                     |
|                                               | $V_{IHM}$  | PF2                                                                                    | —                        | $0.7 V_{CC}$   | —                 | $V_{CC} + 0.3$ | V         | Hysteresis input                                     |
| "L" level input voltage                       | $V_{IL}$   | P47, P72, P73, P77                                                                     | *1                       | $V_{SS} - 0.3$ | —                 | $0.3 V_{CC}$   | V         | When CMOS input level (hysteresis input) is selected |
|                                               | $V_{ILS}$  | P00 to P07, P10 to P17, P40 to P47, P60 to P67, P70 to P77, PF0, PF1, PG1, PG2         | *1                       | $V_{SS} - 0.3$ | —                 | $0.2 V_{CC}$   | V         | Hysteresis input                                     |
|                                               | $V_{ILM}$  | PF2                                                                                    | —                        | $V_{SS} - 0.3$ | —                 | $0.3 V_{CC}$   | V         | Hysteresis input                                     |
| Open-drain output application voltage         | $V_D$      | P12, P72, P73, PF2                                                                     | —                        | $V_{SS} - 0.3$ | —                 | $V_{SS} + 5.5$ | V         |                                                      |
| "H" level output voltage                      | $V_{OH1}$  | Output pins other than P12, P62 to P67, P72, P73, PF2                                  | $I_{OH} = -4 \text{ mA}$ | $V_{CC} - 0.5$ | —                 | —              | V         |                                                      |
|                                               | $V_{OH2}$  | P62 to P67                                                                             | $I_{OH} = -8 \text{ mA}$ | $V_{CC} - 0.5$ | —                 | —              | V         |                                                      |
| "L" level output voltage                      | $V_{OL1}$  | Output pins other than P62 to P67                                                      | $I_{OL} = 4 \text{ mA}$  | —              | —                 | 0.4            | V         |                                                      |
|                                               | $V_{OL2}$  | P62 to P67                                                                             | $I_{OL} = 12 \text{ mA}$ | —              | —                 | 0.4            | V         |                                                      |
| Input leak current (Hi-Z output leak current) | $I_{LI}$   | All input pins                                                                         | $0.0 V < V_I < V_{CC}$   | -5             | —                 | +5             | $\mu A$   | When pull-up resistance is disabled                  |
| Pull-up resistance                            | $R_{PULL}$ | P00 to P07, P10, P11, P13 to P17, P40 to P47, P60, P61, P70, P71, P74 to P76, PG1, PG2 | $V_I = 0 V$              | 25             | 50                | 100            | $k\Omega$ | When pull-up resistance is enabled                   |

(Continued)

$(V_{CC} = 5.0\text{ V} \pm 10\%, V_{SS} = 0.0\text{ V}, T_A = -40^\circ\text{C to } +85^\circ\text{C})$ 

| Parameter                          | Symbol      | Pin name                               | Condition                                                                                                                                        | Value |                   |      | Unit          | Remarks                                        |
|------------------------------------|-------------|----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------------------|------|---------------|------------------------------------------------|
|                                    |             |                                        |                                                                                                                                                  | Min   | Typ <sup>*3</sup> | Max  |               |                                                |
| Input capacitance                  | $C_{IN}$    | Other than $V_{CC}$ and $V_{SS}$       | $f = 1\text{ MHz}$                                                                                                                               | —     | 5                 | 15   | pF            |                                                |
| Power supply current <sup>*2</sup> | $I_{CC}$    | $V_{CC}$<br>(External clock operation) | $V_{CC} = 5.5\text{ V}$<br>$F_{CH} = 32\text{ MHz}$<br>$F_{MP} = 16\text{ MHz}$<br>Main clock mode<br>(divided by 2)                             | —     | 14.8              | 17   | mA            | Except during Flash memory writing and erasing |
|                                    |             |                                        |                                                                                                                                                  | —     | 33.5              | 39.5 | mA            | During Flash memory writing and erasing        |
|                                    |             |                                        |                                                                                                                                                  | —     | 16.6              | 21   | mA            | At A/D conversion                              |
|                                    | $I_{CCS}$   |                                        | $V_{CC} = 5.5\text{ V}$<br>$F_{CH} = 32\text{ MHz}$<br>$F_{MP} = 16\text{ MHz}$<br>Main sleep mode<br>(divided by 2)                             | —     | 7                 | 9    | mA            |                                                |
|                                    | $I_{CCL}$   |                                        | $V_{CC} = 5.5\text{ V}$<br>$F_{CL} = 32\text{ kHz}$<br>$F_{MPL} = 16\text{ kHz}$<br>Subclock mode<br>(divided by 2)<br>$T_A = +25^\circ\text{C}$ | —     | 60                | 153  | $\mu\text{A}$ |                                                |
|                                    | $I_{CCLS}$  |                                        | $V_{CC} = 5.5\text{ V}$<br>$F_{CL} = 32\text{ kHz}$<br>$F_{MPL} = 16\text{ kHz}$<br>Subsleep mode<br>(divided by 2)<br>$T_A = +25^\circ\text{C}$ | —     | 9.4               | 84   | $\mu\text{A}$ |                                                |
|                                    | $I_{CCT}$   |                                        | $V_{CC} = 5.5\text{ V}$<br>$F_{CL} = 32\text{ kHz}$<br>Watch mode<br>Main stop mode<br>$T_A = +25^\circ\text{C}$                                 | —     | 4.3               | 30   | $\mu\text{A}$ |                                                |
|                                    | $I_{CCMCR}$ | $V_{CC}$                               | $V_{CC} = 5.5\text{ V}$<br>$F_{CRH} = 12.5\text{ MHz}$<br>$F_{MP} = 12.5\text{ MHz}$<br>Main CR clock mode                                       | —     | 11.8              | 13.2 | mA            |                                                |
|                                    | $I_{CCSCR}$ |                                        | $V_{CC} = 5.5\text{ V}$<br>Sub-CR clock mode<br>(divided by 2)<br>$T_A = +25^\circ\text{C}$                                                      | —     | 113               | 410  | $\mu\text{A}$ |                                                |

(Continued)

(Continued)

 ( $V_{CC} = 5.0 \text{ V} \pm 10\%$ ,  $V_{SS} = 0.0 \text{ V}$ ,  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ )

| Parameter                          | Symbol     | Pin name                               | Condition                                                                                                  | Value |                   |      | Unit          | Remarks |
|------------------------------------|------------|----------------------------------------|------------------------------------------------------------------------------------------------------------|-------|-------------------|------|---------------|---------|
|                                    |            |                                        |                                                                                                            | Min   | Typ <sup>*3</sup> | Max  |               |         |
| Power supply current <sup>*2</sup> | $I_{CCTS}$ | $V_{CC}$<br>(External clock operation) | $V_{CC} = 5.5 \text{ V}$<br>$F_{CH} = 32 \text{ MHz}$<br>Time-base timer mode<br>$T_A = +25^\circ\text{C}$ | —     | 0.9               | 3    | mA            |         |
|                                    | $I_{CCH}$  |                                        | $V_{CC} = 5.5 \text{ V}$<br>Substop mode<br>$T_A = +25^\circ\text{C}$                                      | —     | 3.4               | 22.5 | $\mu\text{A}$ |         |
|                                    | $I_{LVD}$  | $V_{CC}$                               | Current consumption for low-voltage detection circuit only                                                 | —     | 31                | 54   | $\mu\text{A}$ |         |
|                                    | $I_{CRH}$  |                                        | Current consumption for the main CR oscillator                                                             | —     | 0.5               | 0.6  | mA            |         |
|                                    | $I_{CRL}$  |                                        | Current consumption for the sub-CR oscillator oscillating at 100 kHz                                       | —     | 20                | 72   | $\mu\text{A}$ |         |

\*1: The input levels of P47, P72, P73 and P77 can be switched between “CMOS input level” and “hysteresis input level”. The input level selection register (ILSR) is used to switch between the two input levels.

\*2: • The power supply current is determined by the external clock. When the low-voltage detection option is selected, the power-supply current will be the sum of adding the current consumption of the low-voltage detection circuit ( $I_{LVD}$ ) to one of the value from  $I_{CC}$  to  $I_{CCH}$ . In addition, when both the low-voltage detection option and the CR oscillator are selected, the power supply current will be the sum of adding up the current consumption of the low-voltage detection circuit, the current consumption of the CR oscillators ( $I_{CRH}$ ,  $I_{CRL}$ ) and a specified value. In on-chip debug mode, the CR oscillator ( $I_{CRH}$ ) and the low-voltage detection circuit are always enabled, and current consumption therefore increases accordingly.

• See "AC Characteristics: Clock Timing" for  $F_{CH}$  and  $F_{CL}$ .

• See "AC Characteristics: Source Clock/Machine Clock" for  $F_{MP}$  and  $F_{MPL}$ .

\*3:  $V_{CC} = 5.0 \text{ V}$ ,  $T_A = 25^\circ\text{C}$

## 14.4 AC Characteristics

### 14.4.1 Clock Timing

( $V_{CC} = 2.4 \text{ V to } 5.5 \text{ V}$ ,  $V_{SS} = 0.0 \text{ V}$ ,  $T_A = -40^\circ\text{C to } +85^\circ\text{C}$ )


| Parameter                           | Symbol                 | Pin name | Condition | Value |        |       | Unit | Remarks                                                                           |
|-------------------------------------|------------------------|----------|-----------|-------|--------|-------|------|-----------------------------------------------------------------------------------|
|                                     |                        |          |           | Min   | Typ    | Max   |      |                                                                                   |
| Clock frequency                     | $F_{CH}$               | X0, X1   | —         | 1     | —      | 16.25 | MHz  | When the main oscillation circuit is used                                         |
|                                     |                        | X0       | X1: open  | 1     | —      | 12    | MHz  | When the main external clock is used                                              |
|                                     |                        | X0, X1   | *1        | 1     | —      | 32.5  | MHz  |                                                                                   |
|                                     | $F_{CRH}$              | —        | —         | 12.25 | 12.5   | 12.75 | MHz  | When the main CR clock is used*2                                                  |
|                                     |                        |          |           | 9.80  | 10     | 10.20 | MHz  |                                                                                   |
|                                     |                        |          |           | 7.84  | 8      | 8.16  | MHz  |                                                                                   |
|                                     |                        |          |           | 0.98  | 1      | 1.02  | MHz  |                                                                                   |
|                                     |                        |          |           | 12.18 | 12.5   | 12.82 | MHz  | When the main CR clock is used*3                                                  |
|                                     |                        |          |           | 9.75  | 10     | 10.25 | MHz  |                                                                                   |
|                                     |                        |          |           | 7.80  | 8      | 8.20  | MHz  |                                                                                   |
|                                     |                        |          |           | 0.97  | 1      | 1.03  | MHz  |                                                                                   |
|                                     | $F_{CL}$               | X0A, X1A | —         | —     | 32.768 | —     | kHz  | When the sub-oscillation circuit is used                                          |
|                                     |                        |          |           | —     | 32.768 | —     | kHz  | When the sub-external clock is used                                               |
|                                     | $F_{CRL}$              | —        | —         | 50    | 100    | 200   | kHz  | When the sub-CR clock is used                                                     |
| Clock cycle time                    | $t_{HCYL}$             | X0, X1   | —         | 61.5  | —      | 1000  | ns   | When the main oscillation circuit is used                                         |
|                                     |                        | X0       | X1: open  | 83.4  | —      | 1000  | ns   | When the external clock is used                                                   |
|                                     |                        | X0, X1   | *1        | 30.8  | —      | 1000  | ns   |                                                                                   |
|                                     | $t_{LCYL}$             | X0A, X1A | —         | —     | 30.5   | —     | μs   | When the subclock is used                                                         |
| Input clock pulse width             | $t_{WH1}$              | X0       | X1: open  | 33.4  | —      | —     | ns   | When the external clock is used, the duty ratio should range between 40% and 60%. |
|                                     | $t_{WL1}$              | X0, X1   | *1        | 12.4  | —      | —     | ns   |                                                                                   |
|                                     | $t_{WH2}$<br>$t_{WL2}$ | X0A      | —         | —     | 15.2   | —     | μs   |                                                                                   |
| Input clock rise time and fall time | $t_{CR}$               | X0       | X1: open  | —     | —      | 5     | ns   | When the external clock is used                                                   |
|                                     | $t_{CF}$               | X0, X1   | *1        | —     | —      | 5     | ns   |                                                                                   |
| CR oscillation start time           | $t_{CRHWK}$            | —        | —         | —     | —      | 80    | μs   | When the main CR clock is used                                                    |
|                                     | $t_{CRLWK}$            | —        | —         | —     | —      | 10    | μs   | When the sub-CR clock is used                                                     |

\*1: The external clock signal is input to X0 and the inverted external clock signal to X1.

\*2: These specifications are only applicable to a product in LQFP package (FPT-48P-M49 or FPT-52P-M02).


\*3: These specifications are only applicable to a product in QFN package (LCC-48P-M11).

- Input waveform generated when an external clock (main clock) is used

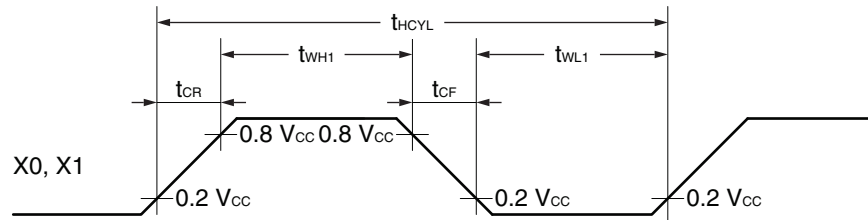


- Figure of main clock input port external connection


When a crystal oscillator or a ceramic oscillator is used




When the external clock is used (X1 is open)



When the external clock is used




- Input waveform generated when an external clock (subclock) is used

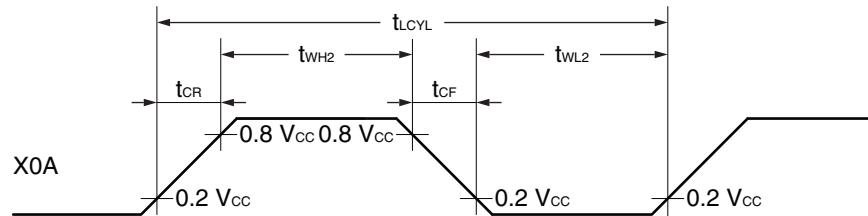


- Figure of subclock input port external connection

When a crystal oscillator or a ceramic oscillator is used



When the external clock is used



#### 14.4.2 Source Clock/Machine Clock

( $V_{CC} = 5.0 V \pm 10\%$ ,  $V_{SS} = 0.0 V$ ,  $T_A = -40^\circ C$  to  $+85^\circ C$ )

| Parameter                                                          | Symbol            | Pin name | Value  |        |        | Unit | Remarks                                                                                                                                        |
|--------------------------------------------------------------------|-------------------|----------|--------|--------|--------|------|------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                    |                   |          | Min    | Typ    | Max    |      |                                                                                                                                                |
| Source clock cycle time*1                                          | t <sub>SCLK</sub> | —        | 61.5   | —      | 2000   | ns   | When the main external clock is used<br>Min: F <sub>CH</sub> = 32.5 MHz, divided by 2<br>Max: F <sub>CH</sub> = 1 MHz, divided by 2            |
|                                                                    |                   |          | 80     | —      | 1000   | ns   | When the main CR clock is used<br>Min: F <sub>CRH</sub> = 12.5 MHz<br>Max: F <sub>CRH</sub> = 1 MHz                                            |
|                                                                    |                   |          | —      | 61     | —      | μs   | When the sub-oscillation clock is used<br>F <sub>CL</sub> = 32.768 kHz, divided by 2                                                           |
|                                                                    |                   |          | —      | 20     | —      | μs   | When the sub-CR clock is used<br>F <sub>CRL</sub> = 100 kHz, divided by 2                                                                      |
| Source clock frequency                                             | F <sub>SP</sub>   | —        | 0.5    | —      | 16.25  | MHz  | When the main oscillation clock is used                                                                                                        |
|                                                                    | F <sub>SPL</sub>  |          | 1      | —      | 12.5   | MHz  | When the main CR clock is used                                                                                                                 |
|                                                                    |                   |          | —      | 16.384 | —      | kHz  | When the sub-oscillation clock is used                                                                                                         |
|                                                                    |                   |          | —      | 50     | —      | kHz  | When the sub-CR clock is used<br>F <sub>CRL</sub> = 100 kHz, divided by 2                                                                      |
| Machine clock cycle time*2<br>(minimum instruction execution time) | t <sub>MCLK</sub> | —        | 61.5   | —      | 32000  | ns   | When the main oscillation clock is used<br>Min: F <sub>SP</sub> = 16.25 MHz, no division<br>Max: F <sub>SP</sub> = 0.5 MHz, divided by 16      |
|                                                                    |                   |          | 80     | —      | 16000  | ns   | When the main CR clock is used<br>Min: F <sub>SP</sub> = 12.5 MHz<br>Max: F <sub>SP</sub> = 1 MHz, divided by 16                               |
|                                                                    |                   |          | 61     | —      | 976.5  | μs   | When the sub-oscillation clock is used<br>Min: F <sub>SPL</sub> = 16.384 kHz, no division<br>Max: F <sub>SPL</sub> = 16.384 kHz, divided by 16 |
|                                                                    |                   |          | 20     | —      | 320    | μs   | When the sub-CR clock is used<br>Min: F <sub>SPL</sub> = 50 kHz, no division<br>Max: F <sub>SPL</sub> = 50 kHz, divided by 16                  |
| Machine clock frequency                                            | F <sub>MP</sub>   | —        | 0.031  | —      | 16.25  | MHz  | When the main oscillation clock is used                                                                                                        |
|                                                                    | F <sub>MPL</sub>  |          | 0.0625 | —      | 12.5   | MHz  | When the main CR clock is used                                                                                                                 |
|                                                                    |                   |          | 1.024  | —      | 16.384 | kHz  | When the sub-oscillation clock is used                                                                                                         |
|                                                                    |                   |          | 3.125  | —      | 50     | kHz  | When the sub-CR clock is used<br>F <sub>CRL</sub> = 100 kHz                                                                                    |


\*1: This is the clock before it is divided according to the division ratio set by the machine clock divide ratio select bits (SYCC:DIV1, DIV0). This source clock is divided to become a machine clock according to the divide ratio set by the machine clock divide ratio select bits (SYCC:DIV1, DIV0). In addition, a source clock can be selected from the following.

- Main clock divided by 2
- Main CR clock
- Subclock divided by 2
- Sub-CR clock divided by 2


\*2: This is the operating clock of the microcontroller. A machine clock can be selected from the following.

- Source clock (no division)
- Source clock divided by 4
- Source clock divided by 8
- Source clock divided by 16


- Schematic diagram of the clock generation block

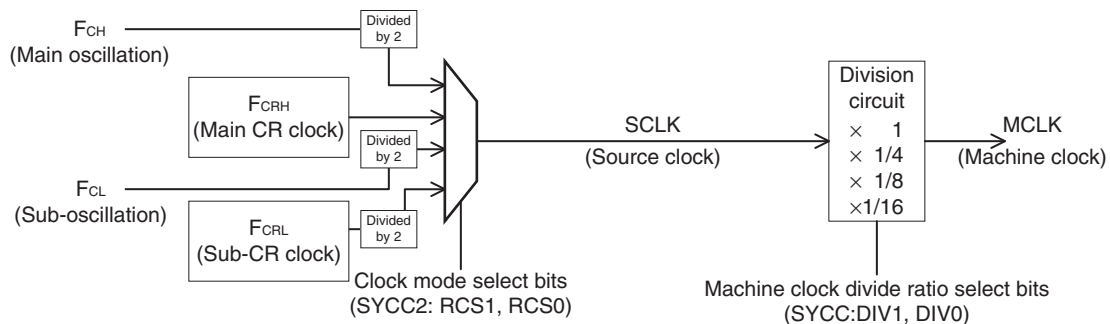

- Operating voltage - Operating frequency (When  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ )  
MB95390H (without the on-chip debug function)

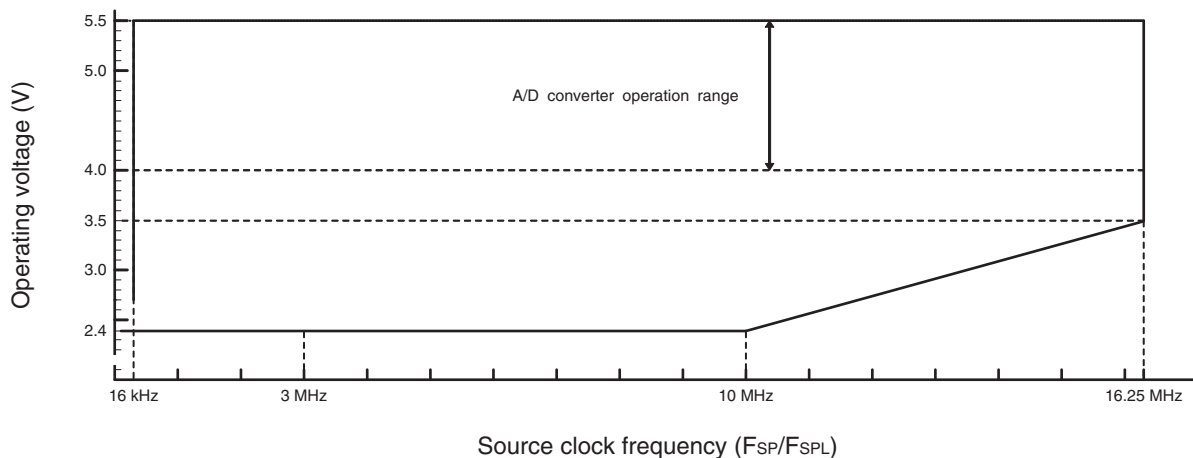

- Operating voltage - Operating frequency (When  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ )  
MB95390H (with the on-chip debug function)

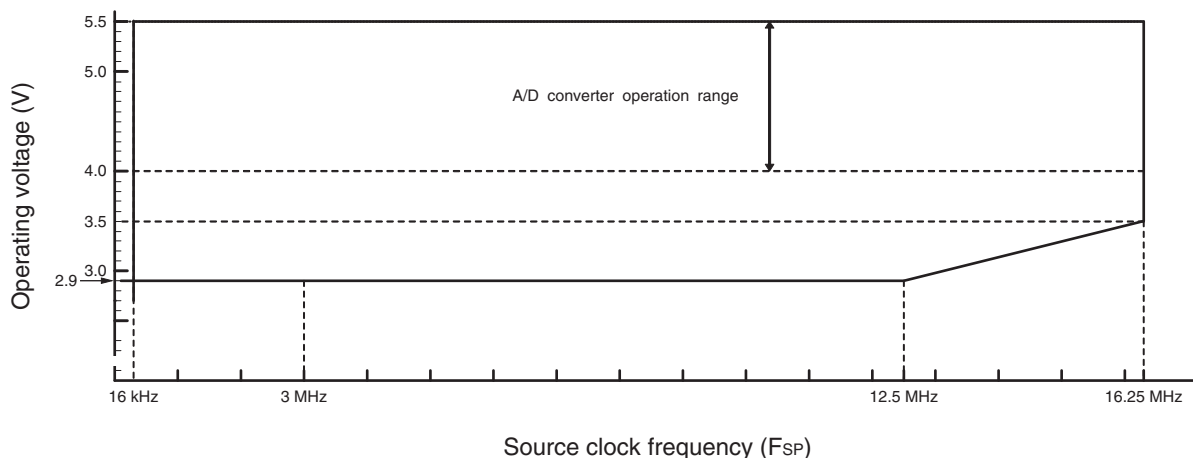


#### 14.4.3 External Reset

( $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $V_{SS} = 0.0\text{ V}$ ,  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ )

| Parameter                                     | Symbol            | Value                                                  |     | Unit          | Remarks                                                              |
|-----------------------------------------------|-------------------|--------------------------------------------------------|-----|---------------|----------------------------------------------------------------------|
|                                               |                   | Min                                                    | Max |               |                                                                      |
| $\overline{\text{RST}}$ "L" level pulse width | $t_{\text{RSTL}}$ | $2 t_{\text{MCLK}}^{*1}$                               | —   | ns            | In normal operation                                                  |
|                                               |                   | Oscillation time of the oscillator <sup>*2</sup> + 100 | —   | $\mu\text{s}$ | In stop mode, subclock mode, subsleep mode, watch mode, and power-on |
|                                               |                   | 100                                                    | —   | $\mu\text{s}$ | In time-base timer mode                                              |

\*1: See "Source Clock/Machine Clock" for  $t_{\text{MCLK}}$ .


\*2: The oscillation time of an oscillator is the time for it to reach 90% of its amplitude. The crystal oscillator has an oscillation time of between several ms and tens of ms. The ceramic oscillator has an oscillation time of between hundreds of  $\mu\text{s}$  and several ms. The external clock has an oscillation time of 0 ms. The CR oscillator clock has an oscillation time of between several  $\mu\text{s}$  and several ms.

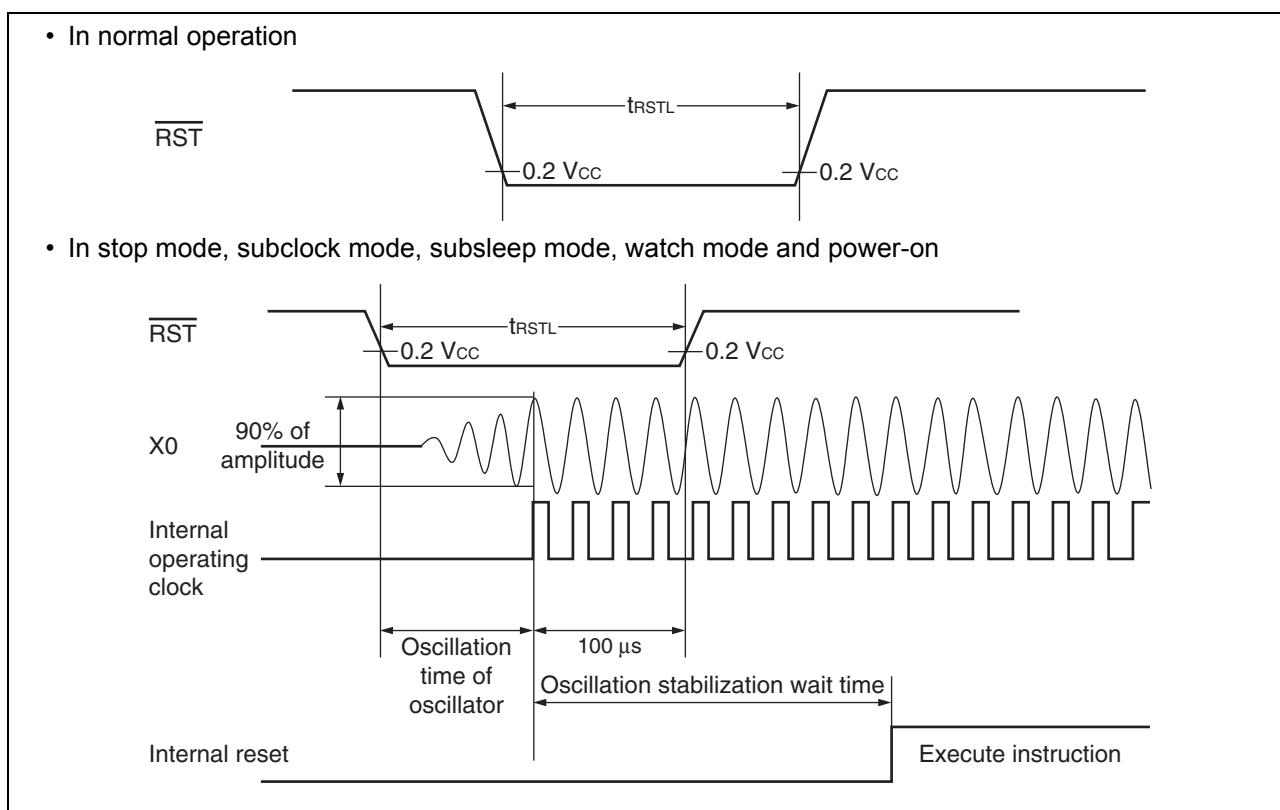


## 14.4.4 Power-on Reset

( $V_{SS} = 0.0\text{ V}$ ,  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ )

| Parameter                | Symbol    | Condition | Value |     | Unit | Remarks                  |
|--------------------------|-----------|-----------|-------|-----|------|--------------------------|
|                          |           |           | Min   | Max |      |                          |
| Power supply rising time | $t_R$     | —         | —     | 50  | ms   |                          |
| Power supply cutoff time | $t_{OFF}$ | —         | 1     | —   | ms   | Wait time until power-on |

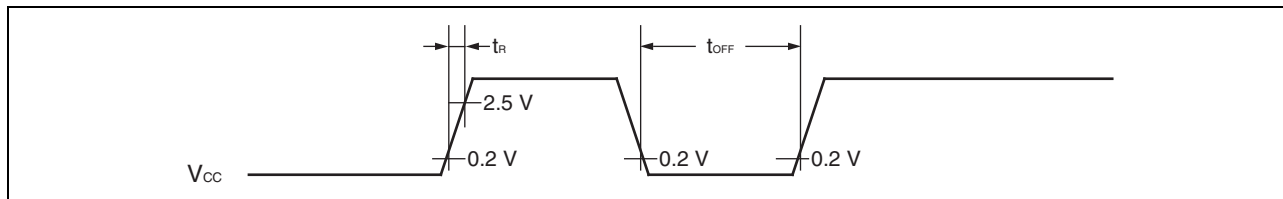

**Note:** A sudden change of power supply voltage may activate the power-on reset function. When changing the power supply voltage during the operation, set the slope of rising to a value below within  $30\text{ mV/ms}$  as shown below.

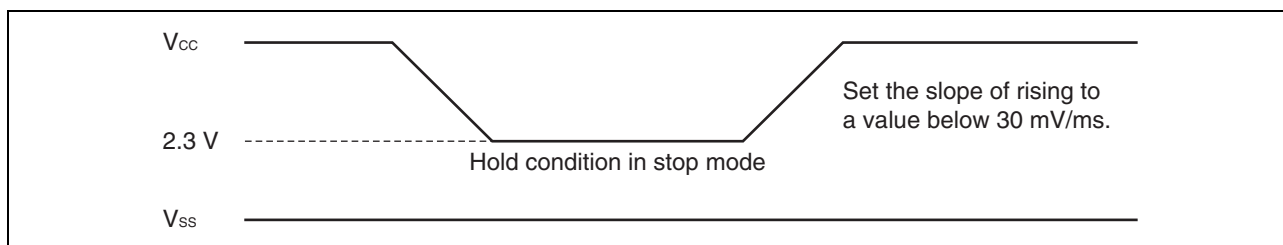


#### 14.4.5 Peripheral Input Timing

( $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $V_{SS} = 0.0\text{ V}$ ,  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ )

| Parameter                        | Symbol     | Pin name                            | Value          |     | Unit |
|----------------------------------|------------|-------------------------------------|----------------|-----|------|
|                                  |            |                                     | Min            | Max |      |
| Peripheral input "H" pulse width | $t_{ILIH}$ | INT00 to INT07, EC0, EC1, TI1, TRG1 | $2 t_{MCLK}^*$ | —   | ns   |
| Peripheral input "L" pulse width | $t_{IHIL}$ |                                     | $2 t_{MCLK}^*$ | —   | ns   |

\*: See "Source Clock/Machine Clock" for  $t_{MCLK}$ .

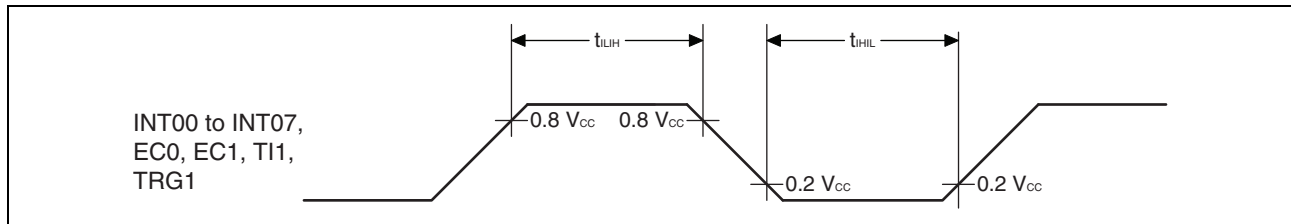

#### 14.4.6 LIN-UART Timing

Sampling is executed at the rising edge of the sampling clock<sup>\*1</sup>, and serial clock delay is disabled<sup>\*2</sup>.

(ESCR register: SCES bit = 0, ECCR register: SCDE bit = 0)

( $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $AV_{SS} = V_{SS} = 0.0\text{ V}$ ,  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ )


| Parameter                                      | Symbol      | Pin name | Condition                                                                      | Value                   |                        | Unit |
|------------------------------------------------|-------------|----------|--------------------------------------------------------------------------------|-------------------------|------------------------|------|
|                                                |             |          |                                                                                | Min                     | Max                    |      |
| Serial clock cycle time                        | $t_{SCYC}$  | SCK      | Internal clock<br>operation output pin:<br>$C_L = 80\text{ pF} + 1\text{ TTL}$ | $5 t_{MCLK}^{*3}$       | —                      | ns   |
| SCK $\downarrow \rightarrow$ SOT delay time    | $t_{SLOVI}$ | SCK, SOT |                                                                                | -95                     | +95                    | ns   |
| Valid SIN $\rightarrow$ SCK $\uparrow$         | $t_{IVSHI}$ | SCK, SIN |                                                                                | $t_{MCLK}^{*3} + 190$   | —                      | ns   |
| SCK $\uparrow \rightarrow$ valid SIN hold time | $t_{SHIXI}$ | SCK, SIN |                                                                                | 0                       | —                      | ns   |
| Serial clock "L" pulse width                   | $t_{SLSH}$  | SCK      | External clock<br>operation output pin:<br>$C_L = 80\text{ pF} + 1\text{ TTL}$ | $3 t_{MCLK}^{*3} - t_R$ | —                      | ns   |
| Serial clock "H" pulse width                   | $t_{SHSL}$  | SCK      |                                                                                | $t_{MCLK}^{*3} + 95$    | —                      | ns   |
| SCK $\downarrow \rightarrow$ SOT delay time    | $t_{SLOVE}$ | SCK, SOT |                                                                                | —                       | $2 t_{MCLK}^{*3} + 95$ | ns   |
| Valid SIN $\rightarrow$ SCK $\uparrow$         | $t_{IVSHE}$ | SCK, SIN |                                                                                | 190                     | —                      | ns   |
| SCK $\uparrow \rightarrow$ valid SIN hold time | $t_{SHIXE}$ | SCK, SIN |                                                                                | $t_{MCLK}^{*3} + 95$    | —                      | ns   |
| SCK fall time                                  | $t_F$       | SCK      |                                                                                | —                       | 10                     | ns   |
| SCK rise time                                  | $t_R$       | SCK      |                                                                                | —                       | 10                     | ns   |

\*1: There is a function used to choose whether the sampling of reception data is performed at a rising edge or a falling edge of the serial clock.


\*2: The serial clock delay function is a function used to delay the output signal of the serial clock for half the clock.

\*3: See "Source Clock/Machine Clock" for  $t_{MCLK}$ .

• Internal shift clock mode

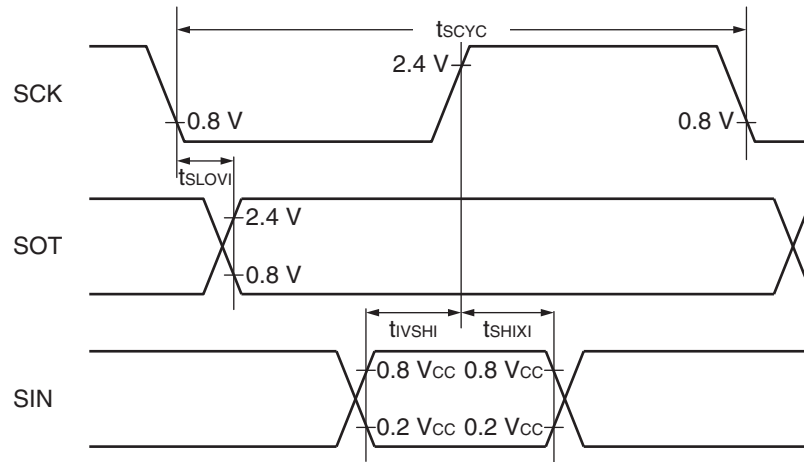

• External shift clock mode

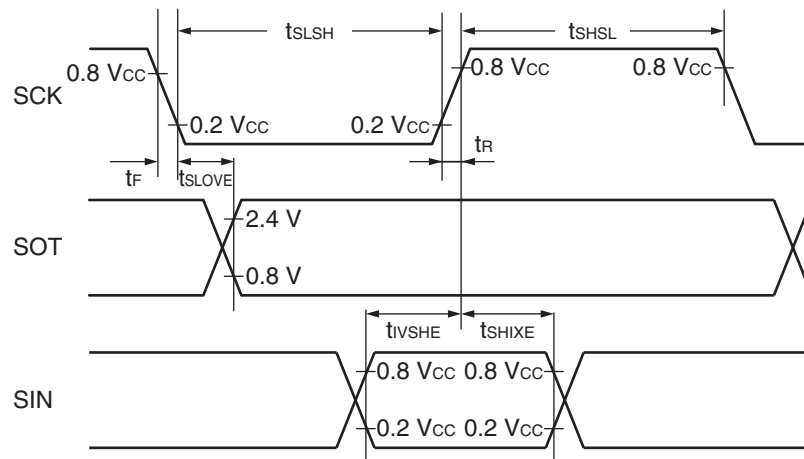

Sampling is executed at the falling edge of the sampling clock\*<sup>1</sup>, and serial clock delay is disabled\*<sup>2</sup>.  
(ESCR register: SCES bit = 1, ECCR register: SCDE bit = 0)

(V<sub>CC</sub> = 5.0 V±10%, V<sub>SS</sub> = 0.0 V, T<sub>A</sub> = -40°C to +85°C)


| Parameter                    | Symbol             | Pin name | Condition                                                                 | Value                                               |                                         | Unit |
|------------------------------|--------------------|----------|---------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------|------|
|                              |                    |          |                                                                           | Min                                                 | Max                                     |      |
| Serial clock cycle time      | t <sub>SCYC</sub>  | SCK      | Internal clock<br>operation output pin:<br>C <sub>L</sub> = 80 pF + 1 TTL | 5 t <sub>MCLK</sub> * <sup>3</sup>                  | —                                       | ns   |
| SCK ↑ → SOT delay time       | t <sub>SHOVI</sub> | SCK, SOT |                                                                           | -95                                                 | +95                                     | ns   |
| Valid SIN → SCK ↓            | t <sub>IVSLI</sub> | SCK, SIN |                                                                           | t <sub>MCLK</sub> * <sup>3</sup> + 190              | —                                       | ns   |
| SCK ↓ → valid SIN hold time  | t <sub>SLIXI</sub> | SCK, SIN |                                                                           | 0                                                   | —                                       | ns   |
| Serial clock "H" pulse width | t <sub>SHSL</sub>  | SCK      | External clock<br>operation output pin:<br>C <sub>L</sub> = 80 pF + 1 TTL | 3 t <sub>MCLK</sub> * <sup>3</sup> - t <sub>R</sub> | —                                       | ns   |
| Serial clock "L" pulse width | t <sub>SLSH</sub>  | SCK      |                                                                           | t <sub>MCLK</sub> * <sup>3</sup> + 95               | —                                       | ns   |
| SCK ↑ → SOT delay time       | t <sub>SHOVE</sub> | SCK, SOT |                                                                           | —                                                   | 2 t <sub>MCLK</sub> * <sup>3</sup> + 95 | ns   |
| Valid SIN → SCK ↓            | t <sub>IVSLE</sub> | SCK, SIN |                                                                           | 190                                                 | —                                       | ns   |
| SCK ↓ → valid SIN hold time  | t <sub>SLIXE</sub> | SCK, SIN |                                                                           | t <sub>MCLK</sub> * <sup>3</sup> + 95               | —                                       | ns   |
| SCK fall time                | t <sub>F</sub>     | SCK      |                                                                           | —                                                   | 10                                      | ns   |
| SCK rise time                | t <sub>R</sub>     | SCK      |                                                                           | —                                                   | 10                                      | ns   |

\*1: There is a function used to choose whether the sampling of reception data is performed at a rising edge or a falling edge of the serial clock.


\*2: The serial clock delay function is a function used to delay the output signal of the serial clock for half the clock.

\*3: See "Source Clock/Machine Clock" for t<sub>MCLK</sub>.

- Internal shift clock mode

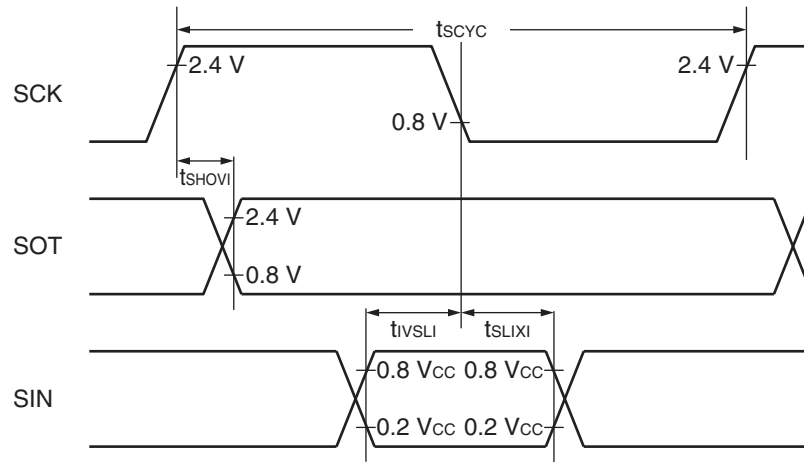

- External shift clock mode

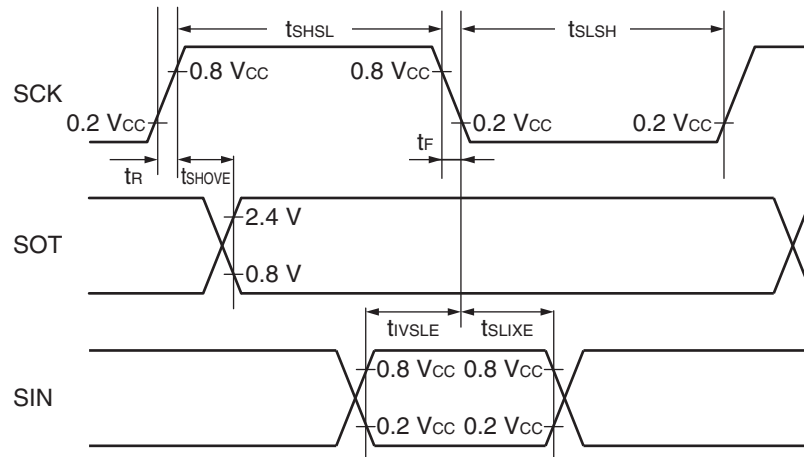

Sampling is executed at the rising edge of the sampling clock\*<sup>1</sup>, and serial clock delay is enabled\*<sup>2</sup>.  
 (ESCR register: SCES bit = 0, ECCR register: SCDE bit = 1)


( $V_{CC} = 5.0 \text{ V} \pm 10\%$ ,  $V_{SS} = 0.0 \text{ V}$ ,  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ )

| Parameter                                        | Symbol      | Pin name | Condition                                                                        | Value                 |                   | Unit |
|--------------------------------------------------|-------------|----------|----------------------------------------------------------------------------------|-----------------------|-------------------|------|
|                                                  |             |          |                                                                                  | Min                   | Max               |      |
| Serial clock cycle time                          | $t_{SCYC}$  | SCK      | Internal clock<br>operation output pin:<br>$C_L = 80 \text{ pF} + 1 \text{ TTL}$ | $5 t_{MCLK}^{*3}$     | —                 | ns   |
| SCK $\uparrow \rightarrow$ SOT delay time        | $t_{SHOVI}$ | SCK, SOT |                                                                                  | -95                   | +95               | ns   |
| Valid SIN $\rightarrow$ SCK $\downarrow$         | $t_{IVSLI}$ | SCK, SIN |                                                                                  | $t_{MCLK}^{*3} + 190$ | —                 | ns   |
| SCK $\downarrow \rightarrow$ valid SIN hold time | $t_{SLIXI}$ | SCK, SIN |                                                                                  | 0                     | —                 | ns   |
| SOT $\rightarrow$ SCK $\downarrow$ delay time    | $t_{SOVLI}$ | SCK, SOT |                                                                                  | —                     | $4 t_{MCLK}^{*3}$ | ns   |

\*1: There is a function used to choose whether the sampling of reception data is performed at a rising edge or a falling edge of the serial clock.

\*2: The serial clock delay function is a function that delays the output signal of the serial clock for half clock.

\*3: See "Source Clock/Machine Clock" for  $t_{MCLK}$ .

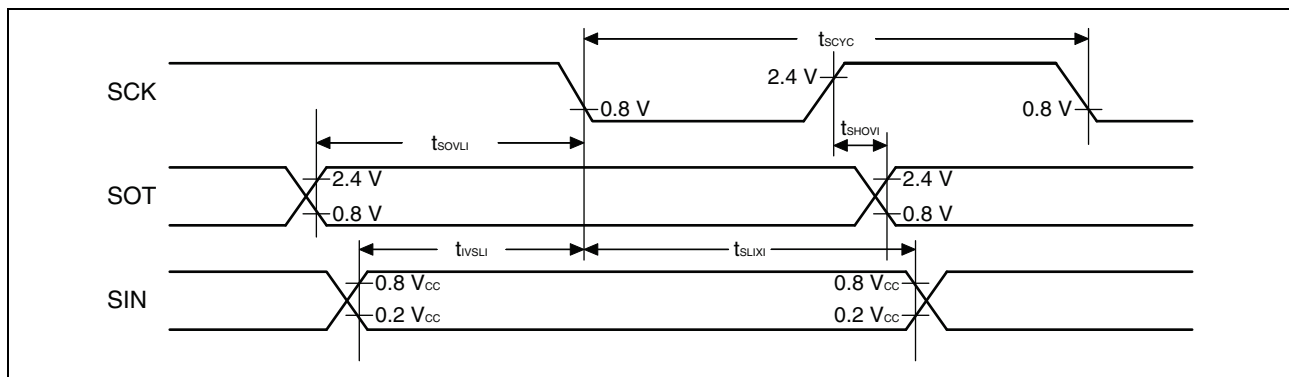

Sampling is executed at the falling edge of the sampling clock\*<sup>1</sup>, and serial clock delay is enabled\*<sup>2</sup>.  
 (ESCR register: SCES bit = 1, ECCR register: SCDE bit = 1)


( $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $V_{SS} = 0.0\text{ V}$ ,  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ )

| Parameter                                      | Symbol      | Pin name | Condition                                                                      | Value                 |                    | Unit |
|------------------------------------------------|-------------|----------|--------------------------------------------------------------------------------|-----------------------|--------------------|------|
|                                                |             |          |                                                                                | Min                   | Max                |      |
| Serial clock cycle time                        | $t_{SCYC}$  | SCK      | Internal clock operation<br>output pin:<br>$C_L = 80\text{ pF} + 1\text{ TTL}$ | $5\ t_{MCLK}^{*3}$    | —                  | ns   |
| SCK $\downarrow \rightarrow$ SOT delay time    | $t_{SLOVI}$ | SCK, SOT |                                                                                | -95                   | +95                | ns   |
| Valid SIN $\rightarrow$ SCK $\uparrow$         | $t_{IVSHI}$ | SCK, SIN |                                                                                | $t_{MCLK}^{*3} + 190$ | —                  | ns   |
| SCK $\uparrow \rightarrow$ valid SIN hold time | $t_{SHIXI}$ | SCK, SIN |                                                                                | 0                     | —                  | ns   |
| SOT $\rightarrow$ SCK $\uparrow$ delay time    | $t_{SOVHI}$ | SCK, SOT |                                                                                | —                     | $4\ t_{MCLK}^{*3}$ | ns   |

\*1: There is a function used to choose whether the sampling of reception data is performed at a rising edge or a falling edge of the serial clock.

\*2: The serial clock delay function is a function that delays the output signal of the serial clock for half clock.


\*3: See "Source Clock/Machine Clock" for  $t_{MCLK}$ .

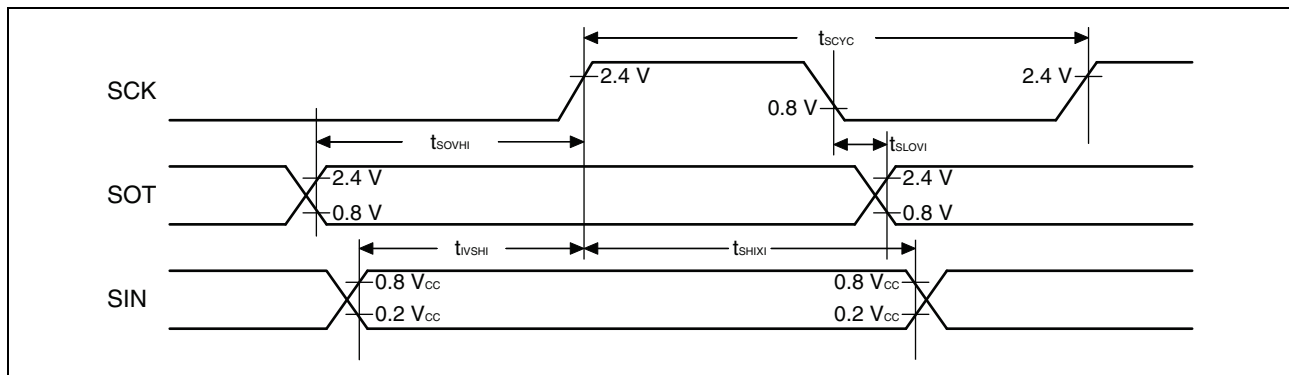

#### 14.4.7 Low-voltage Detection

( $V_{SS} = 0.0 \text{ V}$ ,  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ )

| Parameter                                                  | Symbol    | Value |     |      | Unit          | Remarks                                                                                         |
|------------------------------------------------------------|-----------|-------|-----|------|---------------|-------------------------------------------------------------------------------------------------|
|                                                            |           | Min   | Typ | Max  |               |                                                                                                 |
| Release voltage                                            | $V_{DL+}$ | 2.52  | 2.7 | 2.88 | V             | At power supply rise                                                                            |
| Detection voltage                                          | $V_{DL-}$ | 2.42  | 2.6 | 2.78 | V             | At power supply fall                                                                            |
| Hysteresis width                                           | $V_{HYS}$ | 70    | 100 | —    | mV            |                                                                                                 |
| Power supply start voltage                                 | $V_{off}$ | —     | —   | 2.3  | V             |                                                                                                 |
| Power supply end voltage                                   | $V_{on}$  | 4.9   | —   | —    | V             |                                                                                                 |
| Power supply voltage change time<br>(at power supply rise) | $t_r$     | 3000  | —   | —    | $\mu\text{s}$ | Slope of power supply that the reset release signal generates within the rating ( $V_{DL+}$ )   |
| Power supply voltage change time<br>(at power supply fall) | $t_f$     | 300   | —   | —    | $\mu\text{s}$ | Slope of power supply that the reset detection signal generates within the rating ( $V_{DL-}$ ) |
| Reset release delay time                                   | $t_{d1}$  | —     | —   | 300  | $\mu\text{s}$ |                                                                                                 |
| Reset detection delay time                                 | $t_{d2}$  | —     | —   | 20   | $\mu\text{s}$ |                                                                                                 |

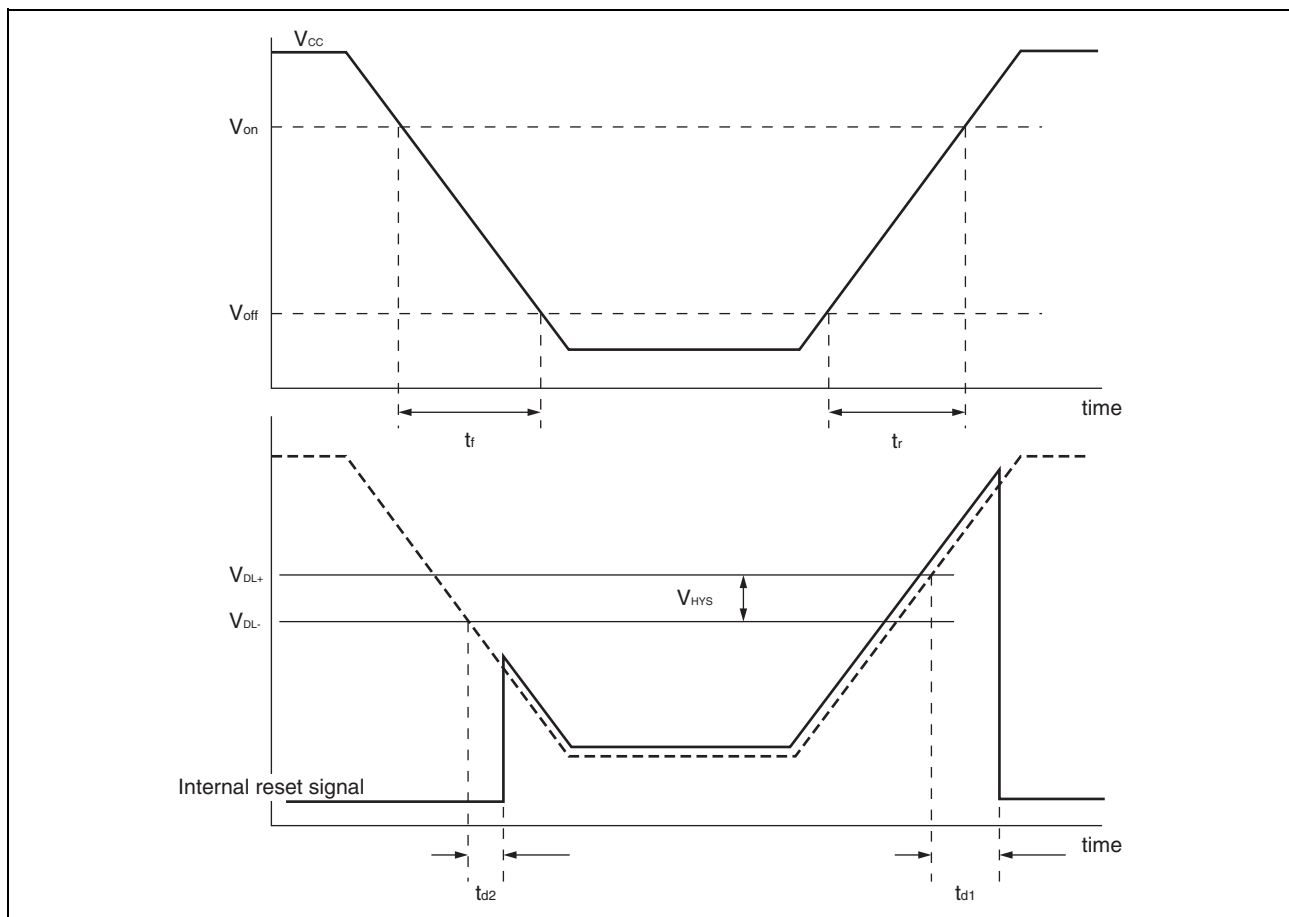

#### 14.4.8 I<sup>2</sup>C Timing


(V<sub>CC</sub> = 5.0 V±10%, AV<sub>SS</sub> = V<sub>SS</sub> = 0.0 V, T<sub>A</sub> = -40°C to +85°C)

| Parameter                                                   | Symbol              | Pin name | Condition                              | Value              |                    |           |                   | Unit |
|-------------------------------------------------------------|---------------------|----------|----------------------------------------|--------------------|--------------------|-----------|-------------------|------|
|                                                             |                     |          |                                        | Stan-<br>dard-mode |                    | Fast-mode |                   |      |
|                                                             |                     |          |                                        | Min                | Max                | Min       | Max               |      |
| SCL clock frequency                                         | f <sub>SCL</sub>    | SCL      | R = 1.7 kΩ,<br>C = 50 pF <sup>*1</sup> | 0                  | 100                | 0         | 400               | kHz  |
| (Repeated) START condition hold time<br>SDA ↓ → SCL ↓       | t <sub>HD;STA</sub> | SCL, SDA |                                        | 4.0                | —                  | 0.6       | —                 | μs   |
| SCL clock “L” width                                         | t <sub>LOW</sub>    | SCL      |                                        | 4.7                | —                  | 1.3       | —                 | μs   |
| SCL clock “H” width                                         | t <sub>HIGH</sub>   | SCL      |                                        | 4.0                | —                  | 0.6       | —                 | μs   |
| (Repeated) START condition setup time<br>SCL ↑ → SDA ↓      | t <sub>SU;STA</sub> | SCL, SDA |                                        | 4.7                | —                  | 0.6       | —                 | μs   |
| Data hold time<br>SCL ↓ → SDA ↓↑                            | t <sub>HD;DAT</sub> | SCL, SDA |                                        | 0                  | 3.45 <sup>*2</sup> | 0         | 0.9 <sup>*3</sup> | μs   |
| Data setup time<br>SDA ↓↑ → SCL ↑                           | t <sub>SU;DAT</sub> | SCL, SDA |                                        | 0.25               | —                  | 0.1       | —                 | μs   |
| STOP condition setup time<br>SCL ↑ → SDA ↑                  | t <sub>SU;STO</sub> | SCL, SDA |                                        | 4                  | —                  | 0.6       | —                 | μs   |
| Bus free time between STOP condition and<br>START condition | t <sub>BUF</sub>    | SCL, SDA |                                        | 4.7                | —                  | 1.3       | —                 | μs   |

\*1: R represents the pull-up resistor of the SCL and SDA lines, and C the load capacitor of the SCL and SDA lines.

\*2: The maximum t<sub>HD;DAT</sub> in the Standard-mode is applicable only when the time during which the device is holding the SCL signal at "L" (t<sub>LOW</sub>) does not extend.

\*3: A Fast-mode I<sup>2</sup>C-bus device can be used in a Standard-mode I<sup>2</sup>C-bus system, provided that the condition of t<sub>SU;DAT</sub> ≥ 250 ns is fulfilled.

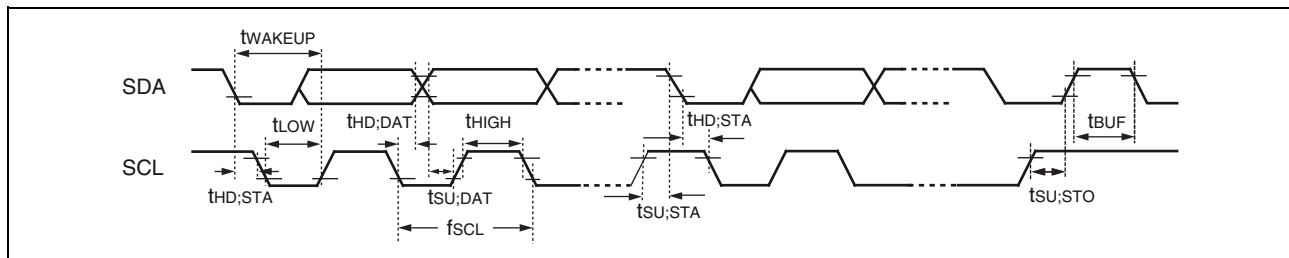

(Continued)

$(V_{CC} = 5.0 V \pm 10\%, AV_{SS} = V_{SS} = 0.0 V, T_A = -40^\circ C \text{ to } +85^\circ C)$ 

| Parameter                                                | Sym-<br>bol  | Pin<br>name | Condition                           | Value*2                    |                            | Unit | Remarks                                                                                                                                                              |
|----------------------------------------------------------|--------------|-------------|-------------------------------------|----------------------------|----------------------------|------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                          |              |             |                                     | Min                        | Max                        |      |                                                                                                                                                                      |
| SCL clock "L" width                                      | $t_{LOW}$    | SCL         | R = 1.7 k $\Omega$ ,<br>C = 50 pF*1 | $(2 + nm/2)t_{MCLK} - 20$  | —                          | ns   | Master mode                                                                                                                                                          |
| SCL clock "H" width                                      | $t_{HIGH}$   | SCL         |                                     | $(nm/2)t_{MCLK} - 20$      | $(nm/2)t_{MCLK} + 20$      | ns   | Master mode                                                                                                                                                          |
| START condition hold time                                | $t_{HD;STA}$ | SCL, SDA    |                                     | $(-1 + nm/2)t_{MCLK} - 20$ | $(-1 + nm)t_{MCLK} + 20$   | ns   | Master mode<br>Maximum value is applied when m, n = 1, 8. Otherwise, the minimum value is applied.                                                                   |
| STOP condition setup time                                | $t_{SU;STO}$ | SCL, SDA    |                                     | $(1 + nm/2)t_{MCLK} - 20$  | $(1 + nm/2)t_{MCLK} + 20$  | ns   | Master mode                                                                                                                                                          |
| START condition setup time                               | $t_{SU;STA}$ | SCL, SDA    |                                     | $(1 + nm/2)t_{MCLK} - 20$  | $(1 + nm/2)t_{MCLK} + 20$  | ns   | Master mode                                                                                                                                                          |
| Bus free time between STOP condition and START condition | $t_{BUF}$    | SCL, SDA    |                                     | $(2 nm + 4)t_{MCLK} - 20$  | —                          | ns   |                                                                                                                                                                      |
| Data hold time                                           | $t_{HD;DAT}$ | SCL, SDA    |                                     | $3 t_{MCLK} - 20$          | —                          | ns   | Master mode                                                                                                                                                          |
| Data setup time                                          | $t_{SU;DAT}$ | SCL, SDA    |                                     | $(-2 + nm/2)t_{MCLK} - 20$ | $(-1 + nm/2)t_{MCLK} + 20$ | ns   | Master mode<br>When assuming that "L" of SCL is not extended, the minimum value is applied to first bit of continuous data. Otherwise, the maximum value is applied. |
| Setup time between clearing interrupt and SCL rising     | $t_{SU;INT}$ | SCL         |                                     | $(nm/2)t_{MCLK} - 20$      | $(1 + nm/2)t_{MCLK} + 20$  | ns   | Minimum value is applied to interrupt at 9th SCL $\downarrow$ . Maximum value is applied to the interrupt at the 8th SCL $\downarrow$ .                              |

(Continued)

(Continued)

( $V_{CC} = 5.0 \text{ V} \pm 10\%$ ,  $AV_{SS} = V_{SS} = 0.0 \text{ V}$ ,  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ )

| Parameter                             | Sym-<br>bol         | Pin<br>name | Condition                                               | Value*2                                                                |     | Unit | Remarks                                                    |
|---------------------------------------|---------------------|-------------|---------------------------------------------------------|------------------------------------------------------------------------|-----|------|------------------------------------------------------------|
|                                       |                     |             |                                                         | Min                                                                    | Max |      |                                                            |
| SCL clock "L" width                   | $t_{\text{LOW}}$    | SCL         | $R = 1.7 \text{ k}\Omega$ ,<br>$C = 50 \text{ pF}^{*1}$ | $4 t_{\text{MCLK}} - 20$                                               | —   | ns   | At reception                                               |
| SCL clock "H" width                   | $t_{\text{HIGH}}$   | SCL         |                                                         | $4 t_{\text{MCLK}} - 20$                                               | —   | ns   | At reception                                               |
| START condition detection             | $t_{\text{HD;STA}}$ | SCL, SDA    |                                                         | $2 t_{\text{MCLK}} - 20$                                               | —   | ns   | Not detected when 1 $t_{\text{MCLK}}$ is used at reception |
| STOP condition detection              | $t_{\text{SU;STO}}$ | SCL, SDA    |                                                         | $2 t_{\text{MCLK}} - 20$                                               | —   | ns   | Not detected when 1 $t_{\text{MCLK}}$ is used at reception |
| RESTART condition detection condition | $t_{\text{SU;STA}}$ | SCL, SDA    |                                                         | $2 t_{\text{MCLK}} - 20$                                               | —   | ns   | Not detected when 1 $t_{\text{MCLK}}$ is used at reception |
| Bus free time                         | $t_{\text{BUF}}$    | SCL, SDA    |                                                         | $2 t_{\text{MCLK}} - 20$                                               | —   | ns   | At reception                                               |
| Data hold time                        | $t_{\text{HD;DAT}}$ | SCL, SDA    |                                                         | $2 t_{\text{MCLK}} - 20$                                               | —   | ns   | At slave transmission mode                                 |
| Data setup time                       | $t_{\text{SU;DAT}}$ | SCL, SDA    |                                                         | $t_{\text{LOW}} - 3 t_{\text{MCLK}} - 20$                              | —   | ns   | At slave transmission mode                                 |
| Data hold time                        | $t_{\text{HD;DAT}}$ | SCL, SDA    |                                                         | 0                                                                      | —   | ns   | At reception                                               |
| Data setup time                       | $t_{\text{SU;DAT}}$ | SCL, SDA    |                                                         | $t_{\text{MCLK}} - 20$                                                 | —   | ns   | At reception                                               |
| SDA↓ → SCL↑<br>(at wakeup function)   | $t_{\text{WAKEUP}}$ | SCL, SDA    |                                                         | Oscillation<br>stabilization wait<br>time<br>$+2 t_{\text{MCLK}} - 20$ | —   | ns   |                                                            |

\*1: R represents the pull-up resistor of the SCL and SDA lines, and C the load capacitor of the SCL and SDA lines.

- \*2:
- See "Source Clock/Machine Clock" for  $t_{\text{MCLK}}$ .
  - m represents the CS4 bit and CS3 bit (bit4 and bit3) in the I<sup>2</sup>C clock control register (ICCR0).
  - n represents the CS2 bit to CS0 bit (bit2 to bit0) in the I<sup>2</sup>C clock control register (ICCR0).
  - The actual timing of I<sup>2</sup>C is determined by the values of m and n set by the machine clock ( $t_{\text{MCLK}}$ ) and the CS4 to CS0 bits in the ICCR0 register.
  - Standard-mode:  
m and n can be set to values in the following range:  $0.9 \text{ MHz} < t_{\text{MCLK}}$  (machine clock)  $< 10 \text{ MHz}$ .  
The usable frequencies of the machine clock are determined by the settings of m and n as shown below.  

|                                                  |                                                           |
|--------------------------------------------------|-----------------------------------------------------------|
| (m, n) = (1, 8)                                  | : $0.9 \text{ MHz} < t_{\text{MCLK}} \leq 1 \text{ MHz}$  |
| (m, n) = (1, 22), (5, 4), (6, 4), (7, 4), (8, 4) | : $0.9 \text{ MHz} < t_{\text{MCLK}} \leq 2 \text{ MHz}$  |
| (m, n) = (1, 38), (5, 8), (6, 8), (7, 8), (8, 8) | : $0.9 \text{ MHz} < t_{\text{MCLK}} \leq 4 \text{ MHz}$  |
| (m, n) = (1, 98)                                 | : $0.9 \text{ MHz} < t_{\text{MCLK}} \leq 10 \text{ MHz}$ |
  - Fast-mode:  
m and n can be set to values in the following range:  $3.3 \text{ MHz} < t_{\text{MCLK}}$  (machine clock)  $< 10 \text{ MHz}$ .  
The usable frequencies of the machine clock are determined by the settings of m and n as shown below.  

|                          |                                                           |
|--------------------------|-----------------------------------------------------------|
| (m, n) = (1, 8)          | : $3.3 \text{ MHz} < t_{\text{MCLK}} \leq 4 \text{ MHz}$  |
| (m, n) = (1, 22), (5, 4) | : $3.3 \text{ MHz} < t_{\text{MCLK}} \leq 8 \text{ MHz}$  |
| (m, n) = (6, 4)          | : $3.3 \text{ MHz} < t_{\text{MCLK}} \leq 10 \text{ MHz}$ |


#### 14.4.9 UART/SIO, Serial I/O Timing

( $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $A_{V_{SS}} = V_{SS} = 0.0\text{ V}$ ,  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ )


| Parameter                                     | Symbol     | Pin name  | Condition                | Value          |      | Unit |
|-----------------------------------------------|------------|-----------|--------------------------|----------------|------|------|
|                                               |            |           |                          | Min            | Max  |      |
| Serial clock cycle time                       | $t_{SCYC}$ | UCK0      | Internal clock operation | $4 t_{MCLK}^*$ | —    | ns   |
| UCK $\downarrow \rightarrow$ UO time          | $t_{SLOV}$ | UCK0, UO0 |                          | -190           | +190 | ns   |
| Valid UI $\rightarrow$ UCK $\uparrow$         | $t_{IVSH}$ | UCK0, UI0 |                          | $2 t_{MCLK}^*$ | —    | ns   |
| UCK $\uparrow \rightarrow$ valid UI hold time | $t_{SHIX}$ | UCK, UI0  |                          | $2 t_{MCLK}^*$ | —    | ns   |
| Serial clock "H" pulse width                  | $t_{SHSL}$ | UCK0      | External clock operation | $4 t_{MCLK}^*$ | —    | ns   |
| Serial clock "L" pulse width                  | $t_{SLSH}$ | UCK0      |                          | $4 t_{MCLK}^*$ | —    | ns   |
| UCK $\downarrow \rightarrow$ UO time          | $t_{SLOV}$ | UCK0, UO0 |                          | —              | 190  | ns   |
| Valid UI $\rightarrow$ UCK $\uparrow$         | $t_{IVSH}$ | UCK0, UI0 |                          | $2 t_{MCLK}^*$ | —    | ns   |
| UCK $\uparrow \rightarrow$ valid UI hold time | $t_{SHIX}$ | UCK0, UI0 |                          | $2 t_{MCLK}^*$ | —    | ns   |

\*: See "Source Clock/Machine Clock" for  $t_{MCLK}$ .

##### • Internal shift clock mode

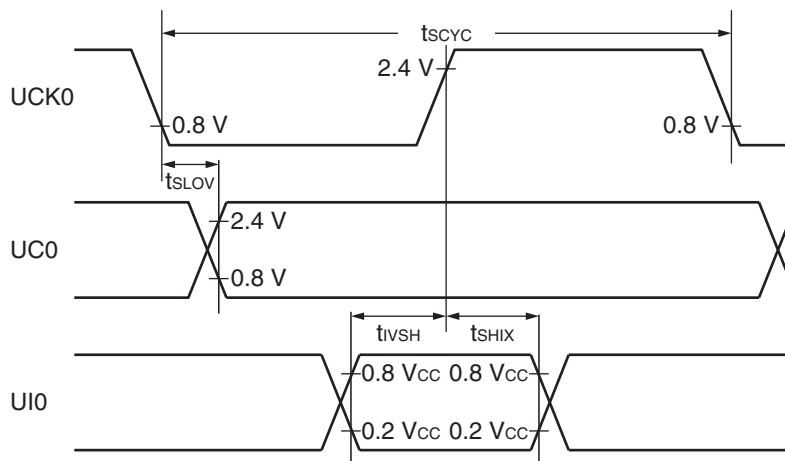


- External shift clock mode

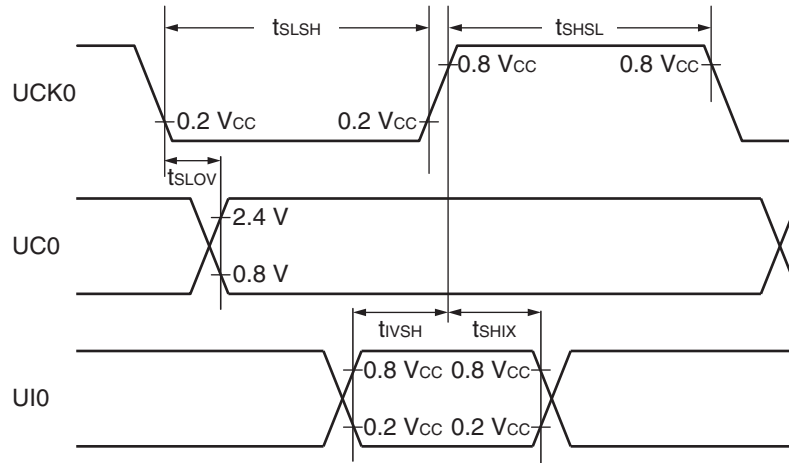

## 14.4.10 MPG Input Timing

( $V_{CC} = 5.0\text{ V} \pm 10\%$ ,  $V_{SS} = 0.0\text{ V}$ ,  $T_A = -40^\circ\text{C}$  to  $+85^\circ\text{C}$ )

| Parameter         | Symbol                   | Pin name              | Condition | Value        |     | Unit | Remarks |
|-------------------|--------------------------|-----------------------|-----------|--------------|-----|------|---------|
|                   |                          |                       |           | Min          | Max |      |         |
| Input pulse width | $t_{TIWH}$<br>$t_{TIWL}$ | SNI0 to SNI2,<br>DTTI | —         | $4 t_{MCLK}$ | —   | ns   |         |

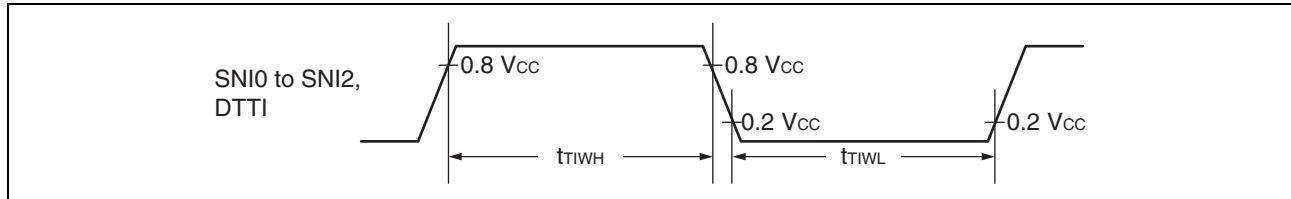

## 14.5 A/D Converter

### 14.5.1 A/D Converter Electrical Characteristics

( $V_{CC} = 4.0\text{ V to }5.5\text{ V}$ ,  $V_{SS} = 0.0\text{ V}$ ,  $T_A = -40^\circ\text{C to }+85^\circ\text{C}$ )


| Parameter                     | Symbol    | Value                     |                           |                           | Unit | Remarks                                                                         |
|-------------------------------|-----------|---------------------------|---------------------------|---------------------------|------|---------------------------------------------------------------------------------|
|                               |           | Min                       | Typ                       | Max                       |      |                                                                                 |
| Resolution                    | —         | —                         | —                         | 10                        | bit  |                                                                                 |
| Total error                   |           | −3                        | —                         | +3                        | LSB  |                                                                                 |
| Linearity error               |           | −2.5                      | —                         | +2.5                      | LSB  |                                                                                 |
| Differential linear error     |           | −1.9                      | —                         | +1.9                      | LSB  |                                                                                 |
| Zero transition voltage       | $V_{OT}$  | $V_{SS} - 1.5\text{ LSB}$ | $V_{SS} + 0.5\text{ LSB}$ | $V_{SS} + 2.5\text{ LSB}$ | V    |                                                                                 |
| Full-scale transition voltage | $V_{FST}$ | $V_{CC} - 4.5\text{ LSB}$ | $V_{CC} - 2\text{ LSB}$   | $V_{CC} + 0.5\text{ LSB}$ | V    |                                                                                 |
| Compare time                  | —         | 0.9                       | —                         | 16500                     | μs   | $4.5\text{ V} \leq V_{CC} \leq 5.5\text{ V}$                                    |
|                               |           | 1.8                       | —                         | 16500                     | μs   | $4.0\text{ V} \leq V_{CC} < 4.5\text{ V}$                                       |
| Sampling time                 | —         | 0.6                       | —                         | ∞                         | μs   | $4.5\text{ V} \leq V_{CC} \leq 5.5\text{ V}$ , with external impedance < 5.4 kΩ |
|                               |           | 1.2                       | —                         | ∞                         | μs   | $4.0\text{ V} \leq V_{CC} < 4.5\text{ V}$ , with external impedance < 2.4 kΩ    |
| Analog input current          | $I_{AIN}$ | −0.3                      | —                         | +0.3                      | μA   |                                                                                 |
| Analog input voltage          | $V_{AIN}$ | $V_{SS}$                  | —                         | $V_{CC}$                  | V    |                                                                                 |

## 14.5.2 Notes on Using the A/D Converter

### ■ External impedance of analog input and its sampling time

- The A/D converter has a sample and hold circuit. If the external impedance is too high to keep sufficient sampling time, the analog voltage charged to the capacitor of the internal sample and hold circuit is insufficient, adversely affecting A/D conversion precision. Therefore, to satisfy the A/D conversion precision standard, considering the relationship between the external impedance and minimum sampling time, either adjust the register value and operating frequency or decrease the external impedance so that the sampling time is longer than the minimum value. In addition, if sufficient sampling time cannot be secured, connect a capacitor of about 0.1  $\mu\text{F}$  to the analog input pin.



#### • Analog input equivalent circuit

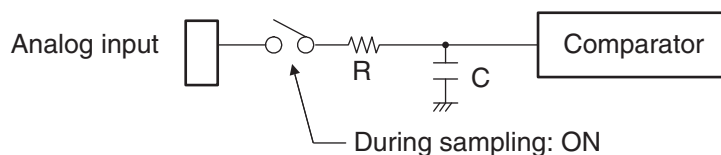

| $V_{CC}$                                     | R                     | C           |
|----------------------------------------------|-----------------------|-------------|
| $4.5\text{ V} \leq V_{CC} \leq 5.5\text{ V}$ | 1.95 k $\Omega$ (Max) | 17 pF (Max) |
| $4.0\text{ V} \leq V_{CC} < 4.5\text{ V}$    | 8.98 k $\Omega$ (Max) | 17 pF (Max) |

Note: The values are reference values.

#### • Relationship between external impedance and minimum sampling time

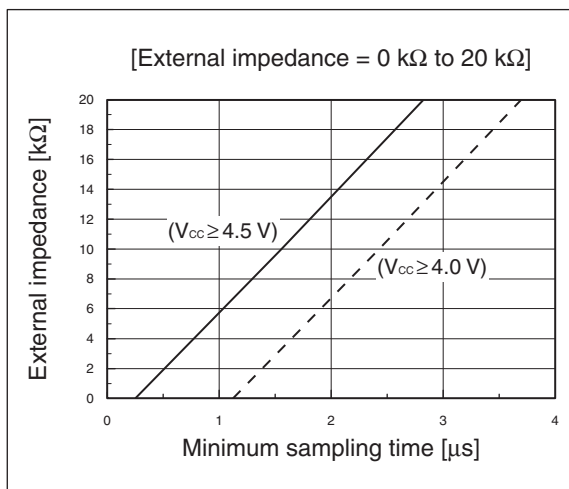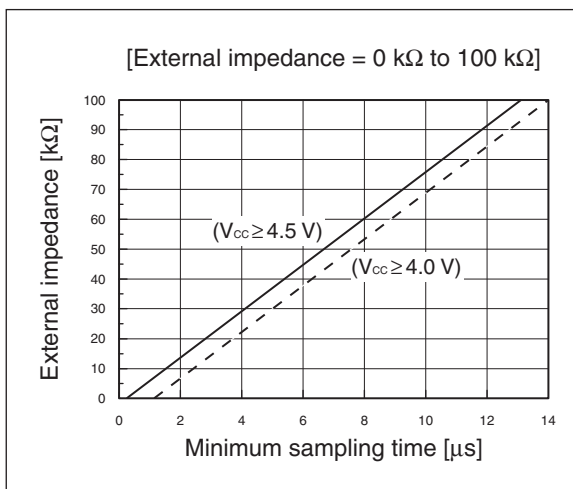

### ■ A/D conversion error

As  $|V_{CC} - V_{SS}|$  decreases, the A/D conversion error increases proportionately.

### 14.5.3 Definitions of A/D Converter Terms

■ **Resolution**

It indicates the level of analog variation that can be distinguished by the A/D converter.  
When the number of bits is 10, analog voltage can be divided into  $2^{10} = 1024$ .

■ **Linearity error (unit: LSB)**


It indicates how much an actual conversion value deviates from the straight line connecting the zero transition point ("00 0000 0000"  $\leftrightarrow$  "00 0000 0001") of a device to the full-scale transition point ("11 1111 1111"  $\leftrightarrow$  "11 1111 1110") of the same device.

■ **Differential linear error (unit: LSB)**

It indicates how much the input voltage required to change the output code by 1 LSB deviates from an ideal value.


■ **Total error (unit: LSB)**

It indicates the difference between an actual value and a theoretical value. The error can be caused by a zero transition error, a full-scale transition errors, a linearity error, a quantum error, or noise.

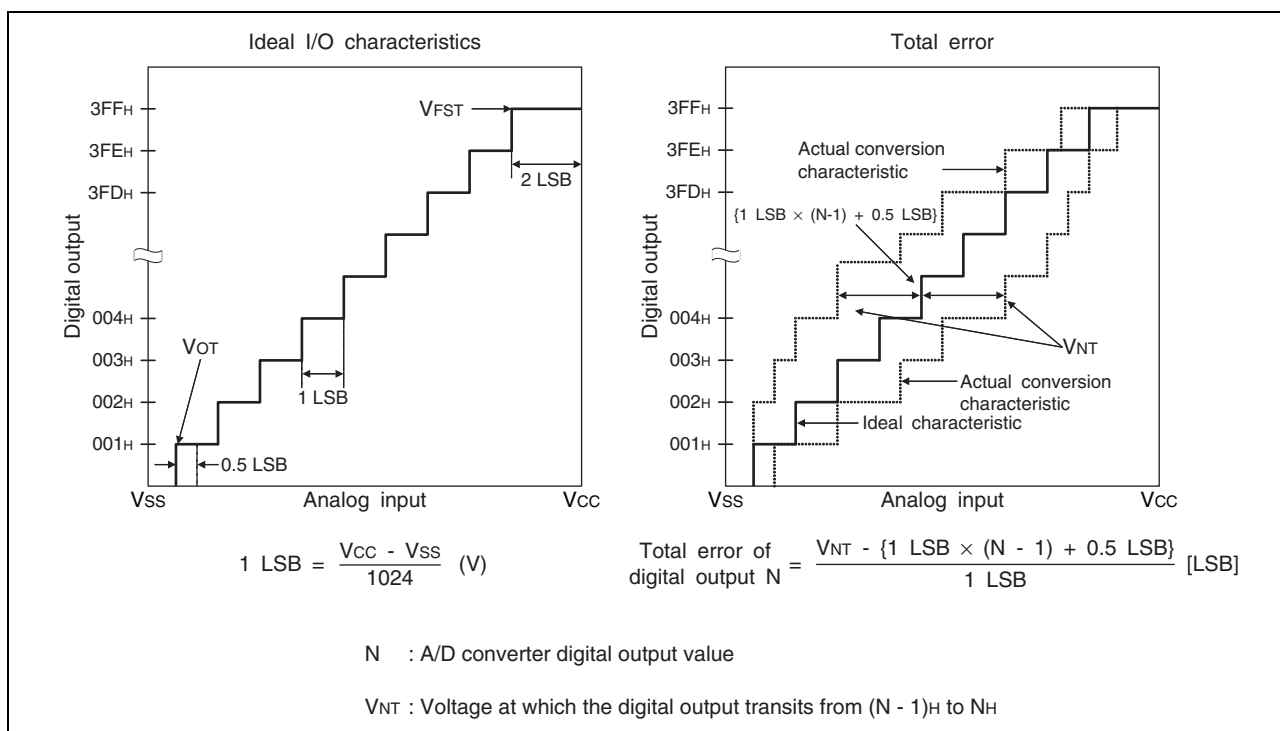

(Continued)

(Continued)

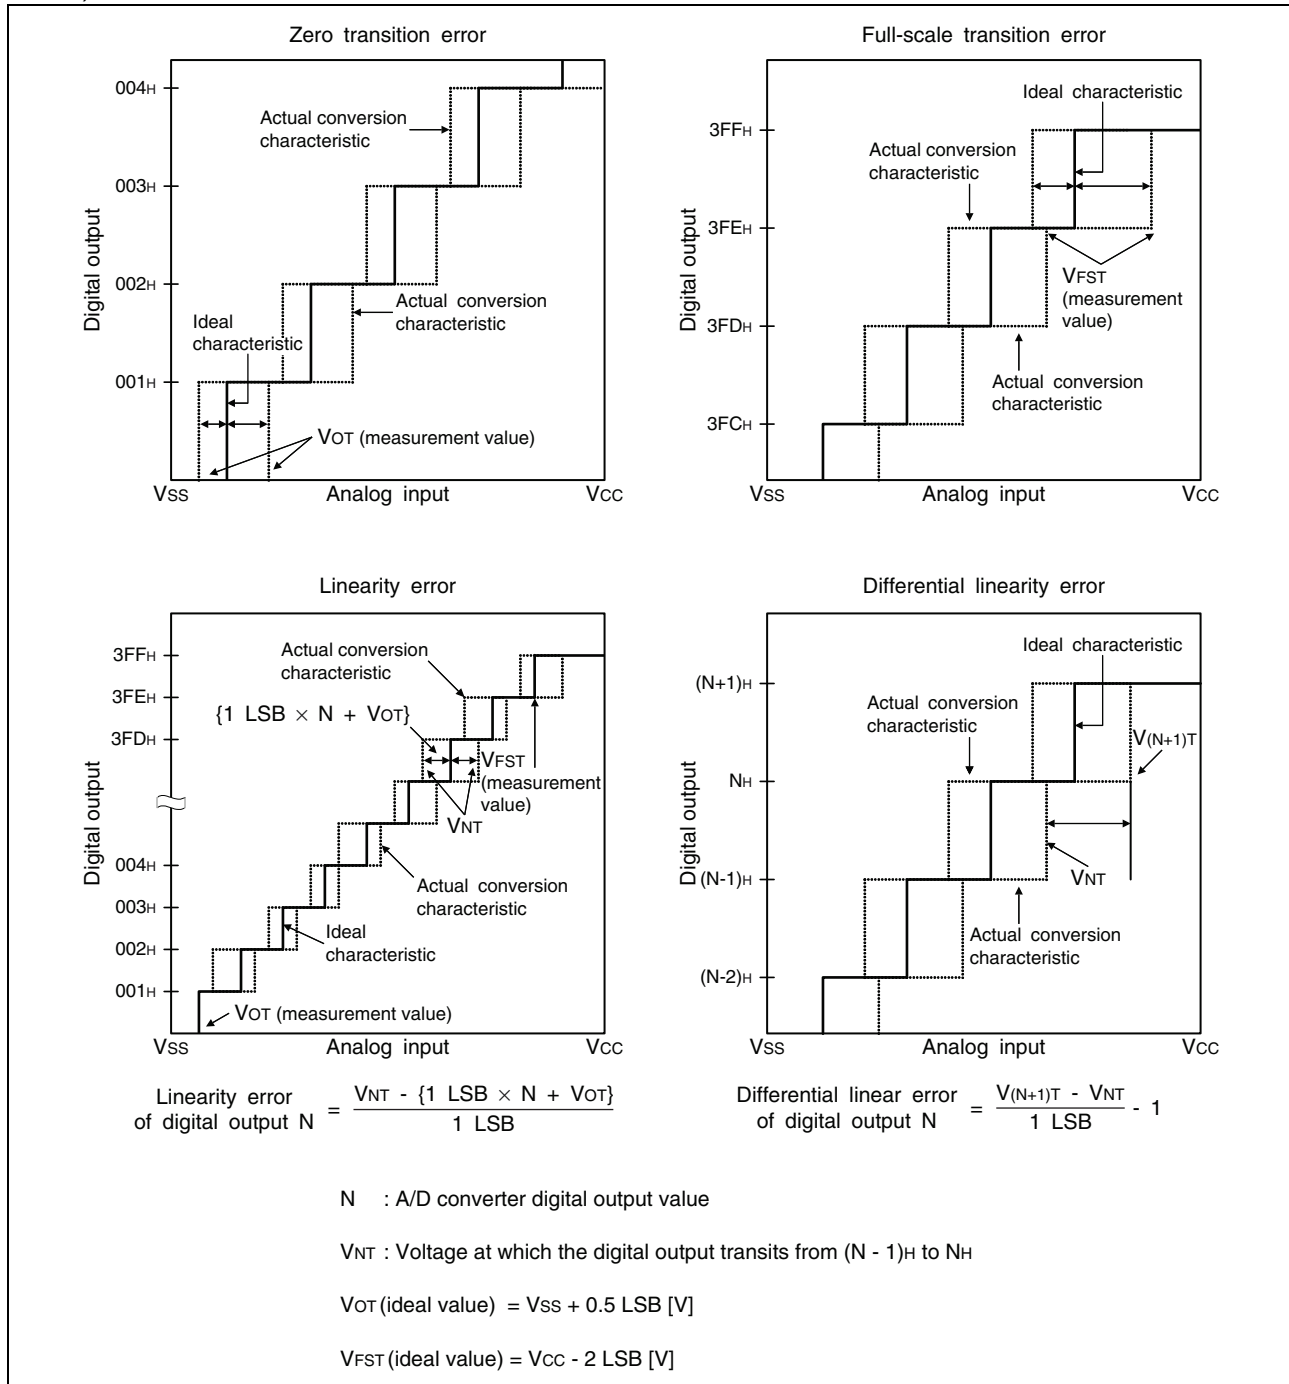

#### 14.6 Flash Memory Write/Erase Characteristics

| Parameter                              | Value            |                   |                    | Unit  | Remarks                                                           |
|----------------------------------------|------------------|-------------------|--------------------|-------|-------------------------------------------------------------------|
|                                        | Min              | Typ               | Max                |       |                                                                   |
| Sector erase time<br>(2 Kbyte sector)  | —                | 0.2 <sup>*1</sup> | 0.5 <sup>*2</sup>  | s     | The time of writing 00 <sub>H</sub> prior to erasure is excluded. |
| Sector erase time<br>(16 Kbyte sector) | —                | 0.5 <sup>*1</sup> | 7.5 <sup>*2</sup>  | s     | The time of writing 00 <sub>H</sub> prior to erasure is excluded. |
| Byte writing time                      | —                | 21                | 6100 <sup>*2</sup> | μs    | System-level overhead is excluded.                                |
| Erase/write cycle                      | 100000           | —                 | —                  | cycle |                                                                   |
| Power supply voltage at erase/write    | 3.0              | —                 | 5.5                | V     |                                                                   |
| Flash memory data retention time       | 20 <sup>*3</sup> | —                 | —                  | year  | Average T <sub>A</sub> = +85°C                                    |

\*1: T<sub>A</sub> = +25°C, V<sub>CC</sub> = 5.0 V, 100000 cycles


\*2: T<sub>A</sub> = +85°C, V<sub>CC</sub> = 3.0 V, 100000 cycles

\*3: This value is converted from the result of a technology reliability assessment. (The value is converted from the result of a high temperature accelerated test using the Arrhenius equation with the average temperature being +85°C).


## 15. Sample Characteristics

### ■ Power supply current temperature characteristics


$I_{CC} - V_{CC}$   
 $T_A = +25^\circ\text{C}$ ,  $F_{MP} = 2, 4, 8, 10, 16$  MHz (divided by 2)  
 Main clock mode with the external clock operating

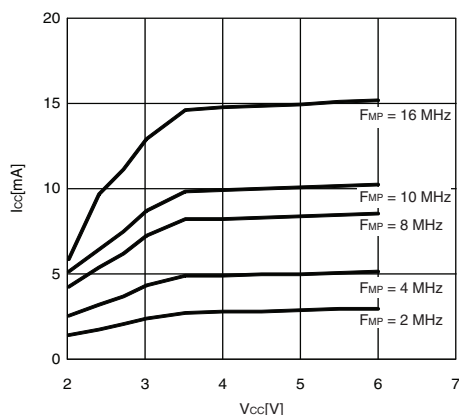


$I_{CC} - T_A$   
 $V_{CC} = 5.5$  V,  $F_{MP} = 10, 16$  MHz (divided by 2)  
 Main clock mode with the external clock operating

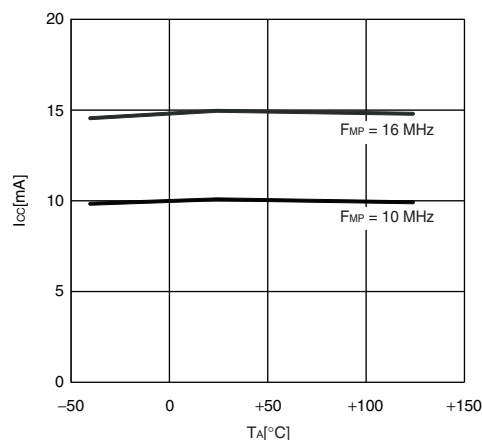


$I_{CCS} - V_{CC}$   
 $T_A = +25^\circ\text{C}$ ,  $F_{MP} = 2, 4, 8, 10, 16$  MHz (divided by 2)  
 Main sleep mode with the external clock operating

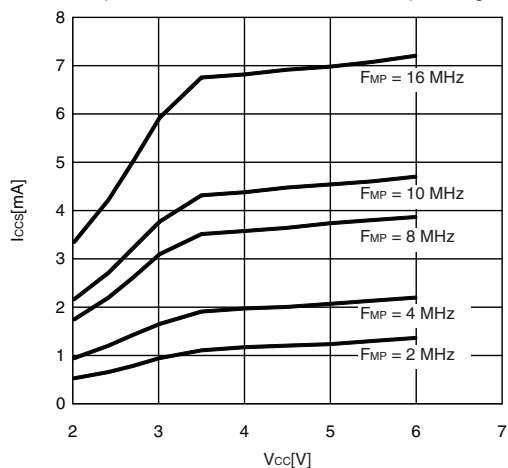


$I_{CCS} - T_A$   
 $V_{CC} = 5.5$  V,  $F_{MP} = 10, 16$  MHz (divided by 2)  
 Main sleep mode with the external clock operating

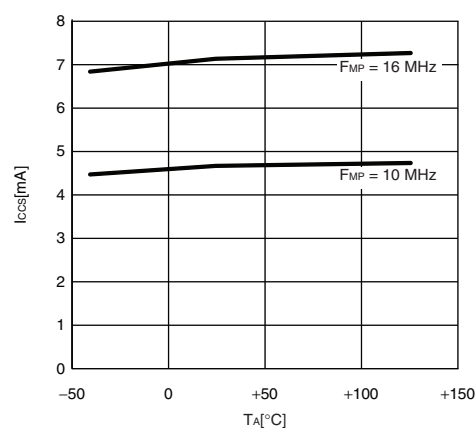

$I_{CCL} - V_{CC}$   
 $T_A = +25^\circ\text{C}$ ,  $F_{MPL} = 16$  kHz (divided by 2)  
 Subclock mode with the external clock operating

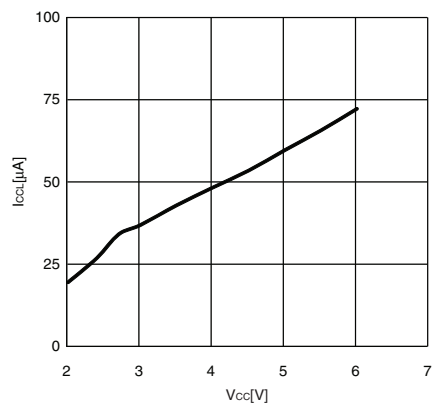


$I_{CCL} - T_A$   
 $V_{CC} = 5.5$  V,  $F_{MPL} = 16$  kHz (divided by 2)  
 Subclock mode with the external clock operating

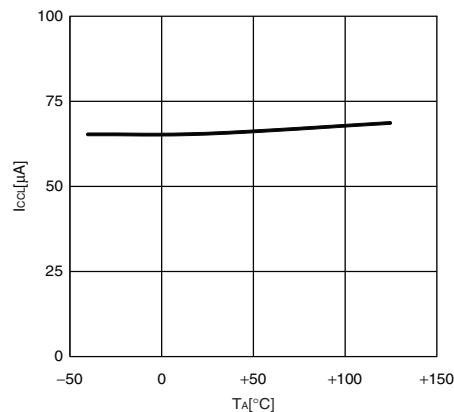


(Continued)


$I_{CCLS} - V_{CC}$   
 $T_A = +25^\circ\text{C}$ ,  $F_{MPL} = 16 \text{ kHz}$  (divided by 2)  
Subsleep mode with the external clock operating

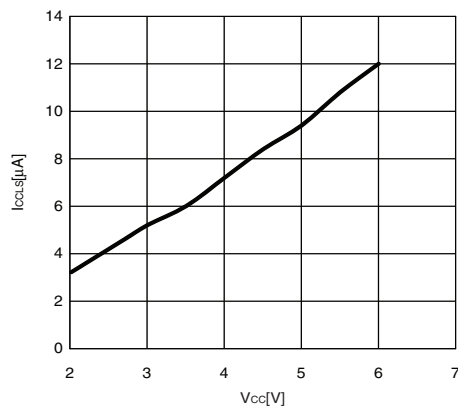


$I_{CCLS} - T_A$   
 $V_{CC} = 5.5 \text{ V}$ ,  $F_{MPL} = 16 \text{ kHz}$  (divided by 2)  
Subsleep mode with the external clock operating

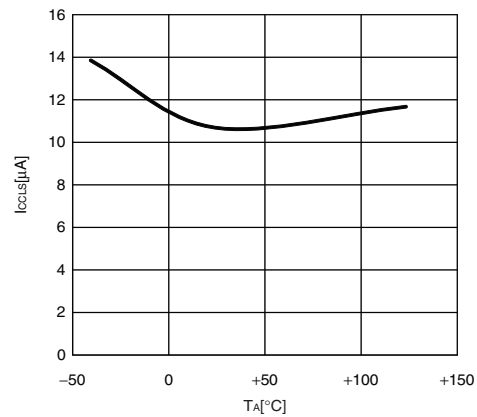


$I_{CCT} - V_{CC}$   
 $T_A = +25^\circ\text{C}$ ,  $F_{MPL} = 16 \text{ kHz}$  (divided by 2)  
Watch mode with the external clock operating

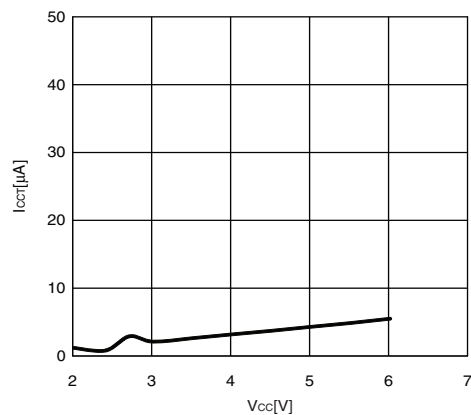


$I_{CCT} - T_A$   
 $V_{CC} = 5.5 \text{ V}$ ,  $F_{MPL} = 16 \text{ kHz}$  (divided by 2)  
Watch mode with the external clock operating

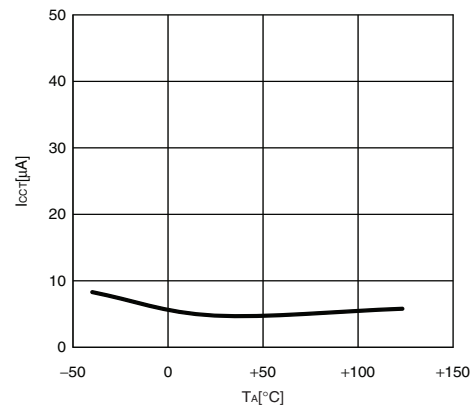


$I_{CTS} - V_{CC}$   
 $T_A = +25^\circ\text{C}$ ,  $F_{MP} = 2, 4, 8, 10, 16 \text{ MHz}$  (divided by 2)  
Time-base timer mode with the external clock operating

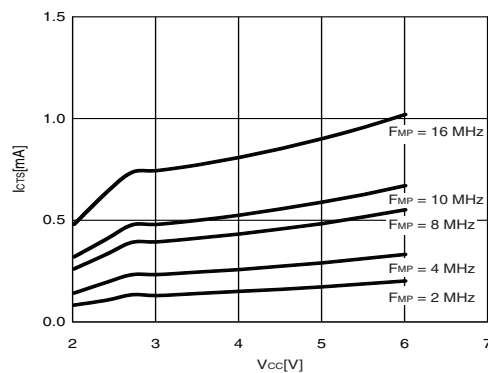


$I_{CTS} - T_A$   
 $V_{CC} = 5.5 \text{ V}$ ,  $F_{MPL} = 10, 16 \text{ kHz}$  (divided by 2)  
Time-base timer mode with the external clock operating

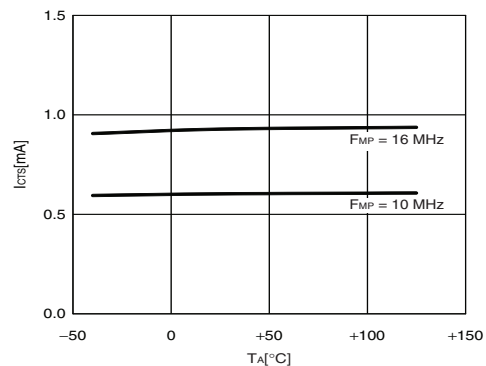


$I_{CCH} - V_{CC}$   
 $T_A = +25^\circ\text{C}$ ,  $F_{MPL} = (\text{stop})$   
Substop mode with the external clock stopping

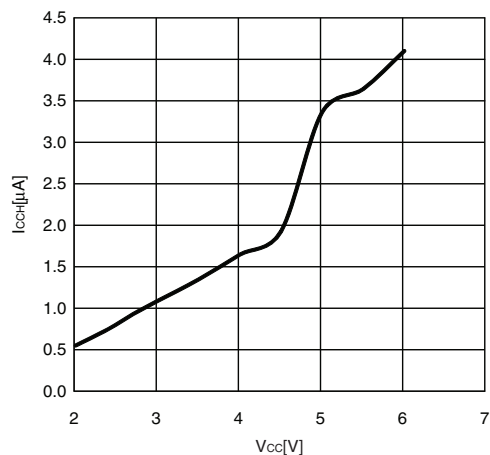


$I_{CCH} - T_A$   
 $V_{CC} = 5.5 \text{ V}$ ,  $F_{MPL} = (\text{stop})$   
Substop mode with the external clock stopping

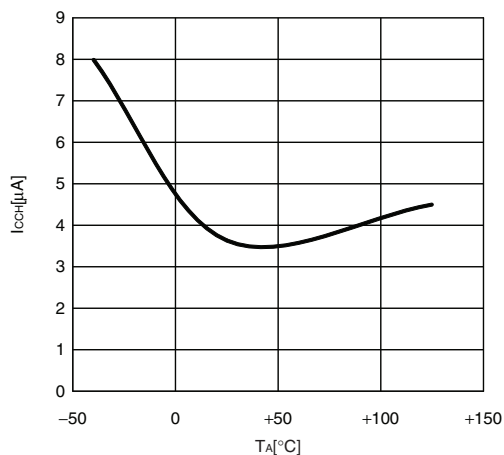


$I_{CCMCR} - V_{CC}$   
 $T_A = +25^\circ\text{C}$ ,  $F_{MP} = 1, 8, 10, 12.5 \text{ MHz}$  (no division)  
Main clock mode with the main CR clock operating

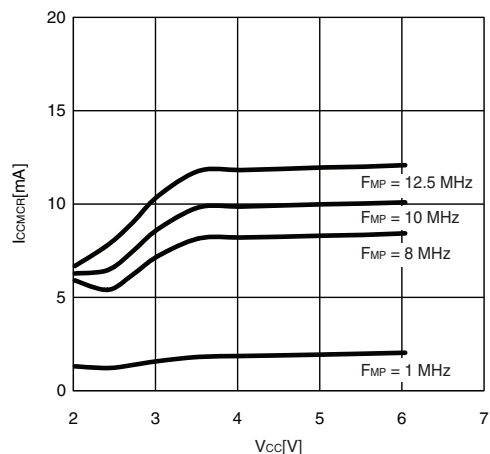


$I_{CCMCR} - T_A$   
 $V_{CC} = 5.5 \text{ V}$ ,  $F_{MP} = 1, 8, 10, 12.5 \text{ MHz}$  (no division)  
Main clock mode with the main CR clock operating

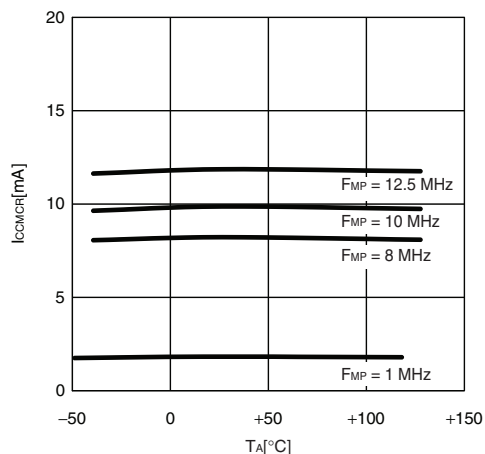


$I_{CCSCR} - V_{CC}$   
 $T_A = +25^\circ\text{C}$ ,  $F_{MPL} = 50 \text{ kHz}$  (divided by 2)  
Subclock mode with the sub-CR clock operating

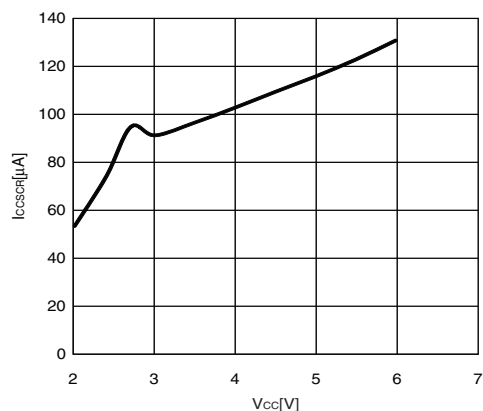


$I_{CCSCR} - T_A$   
 $V_{CC} = 5.5 \text{ V}$ ,  $F_{MPL} = 50 \text{ kHz}$  (divided by 2)  
Subclock mode with the sub-CR clock operating

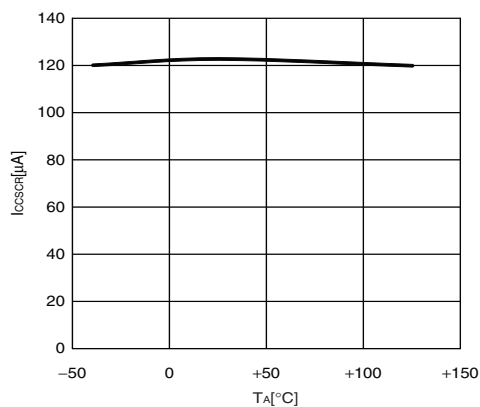


■ Input voltage characteristics

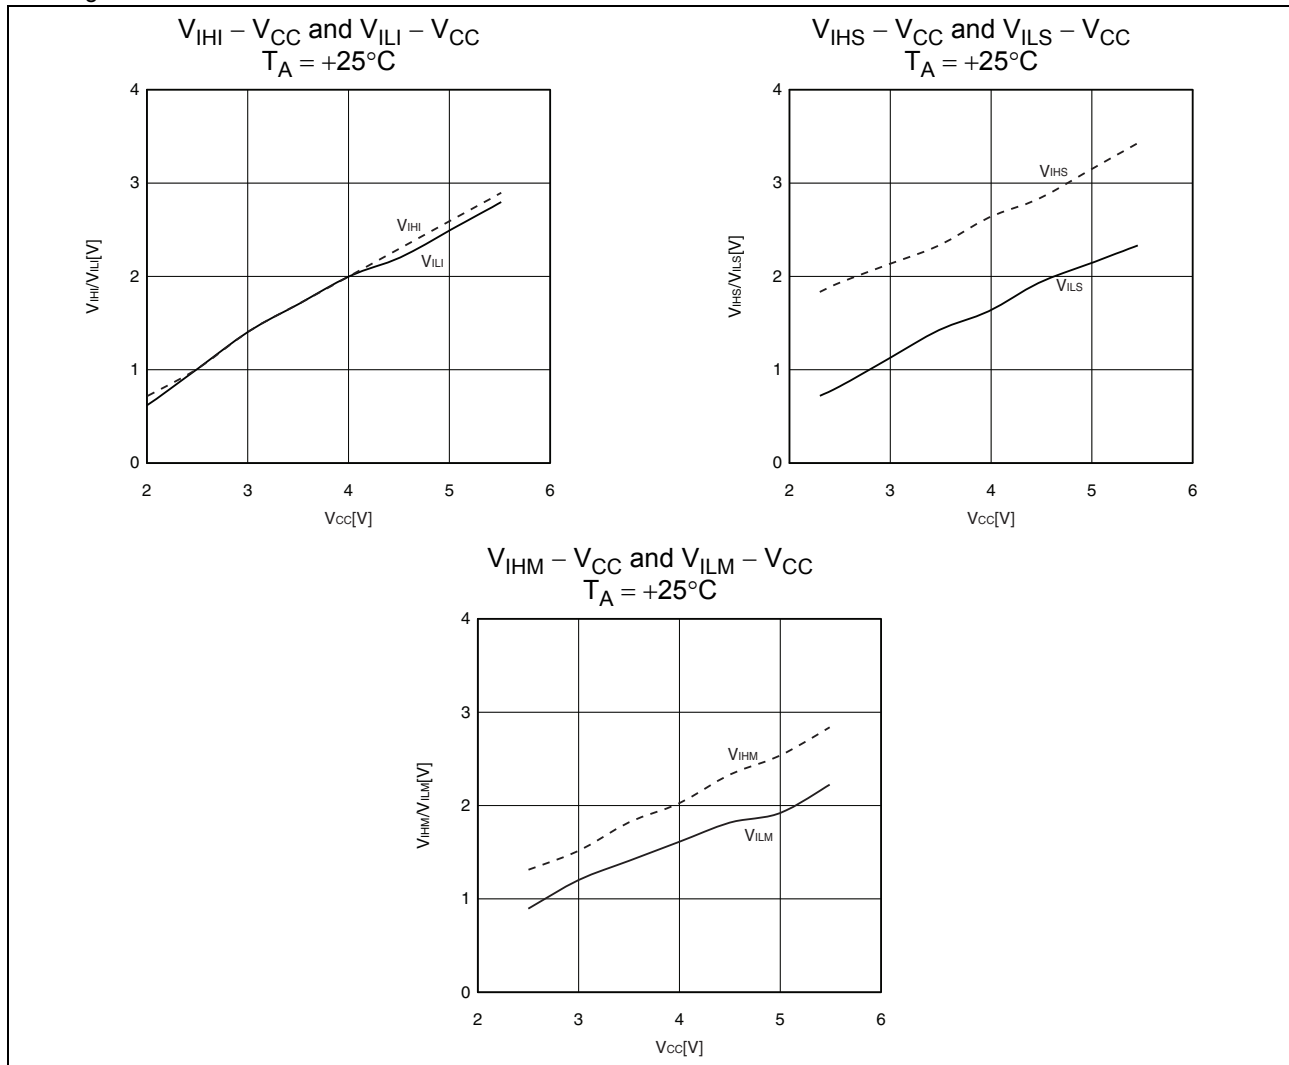

■ Output voltage characteristics

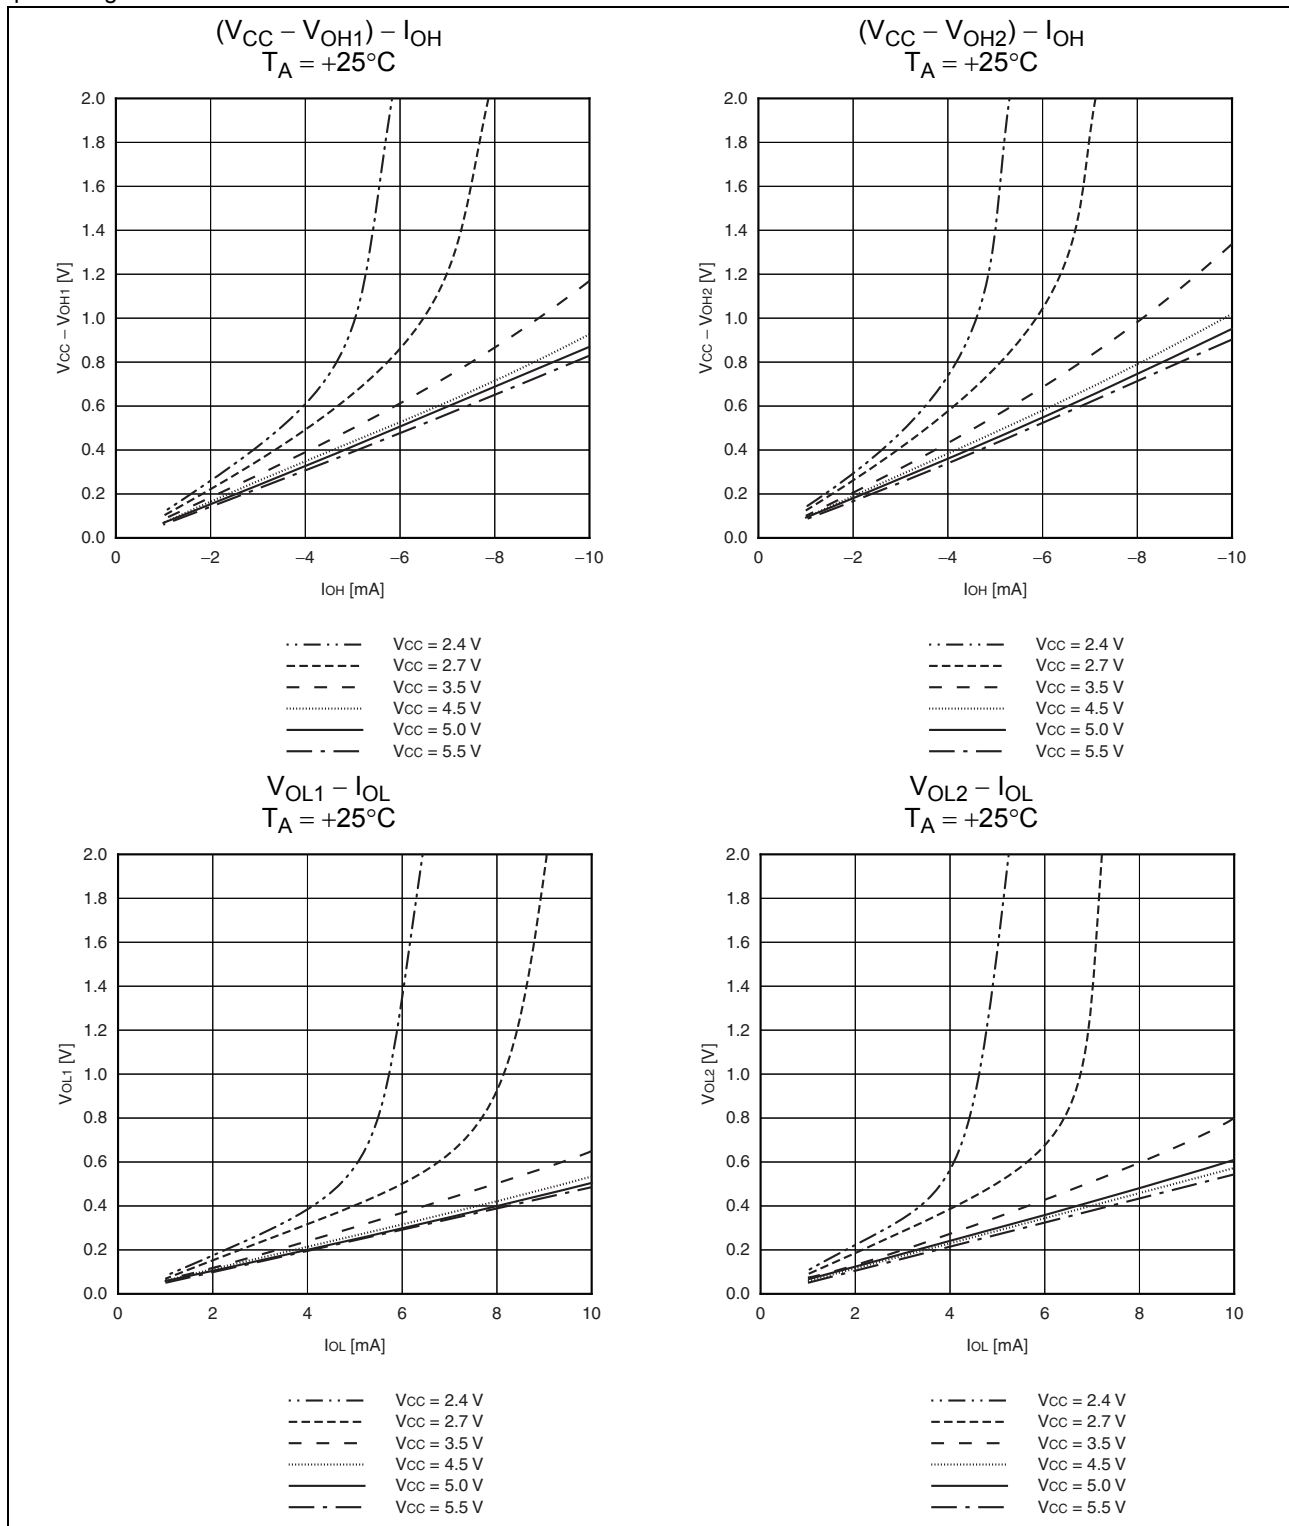

■ Pull-up characteristics

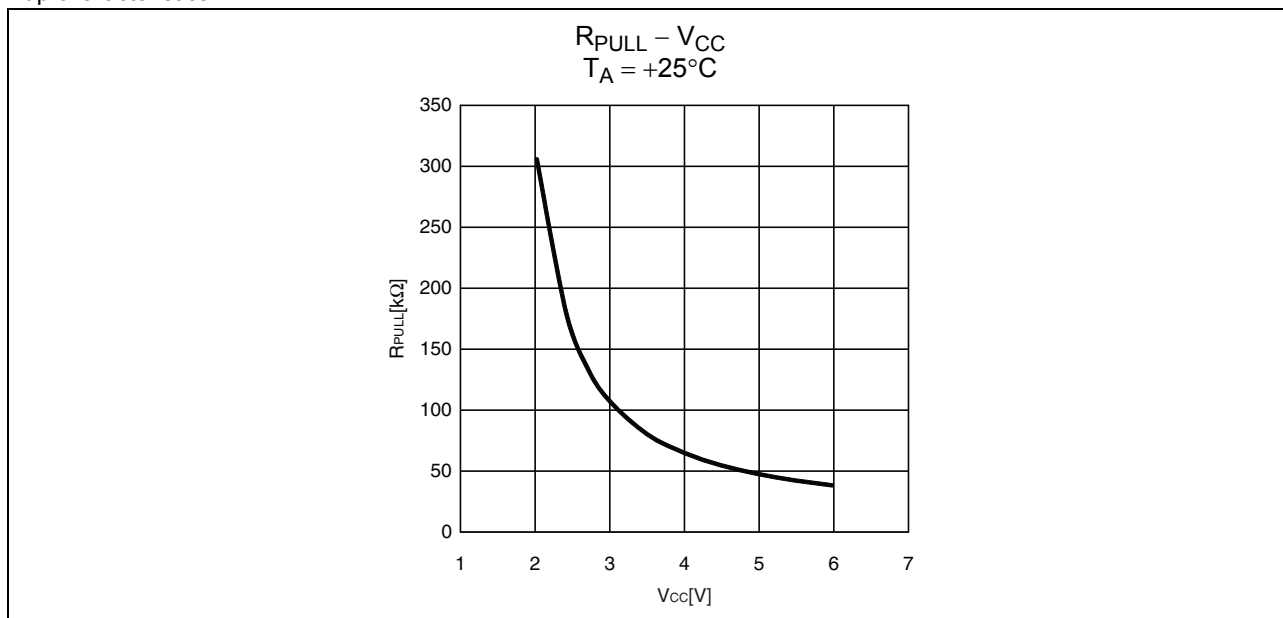


## 16. Mask Options


| No. | Part Number                 | MB95F394H<br>MB95F396H<br>MB95F398H | MB95F394K<br>MB95F396K<br>MB95F398K |
|-----|-----------------------------|-------------------------------------|-------------------------------------|
|     | Selectable/Fixed            | Fixed                               |                                     |
| 1   | Low-voltage detection reset | Without low-voltage detection reset | With low-voltage detection reset    |
| 2   | Reset                       | With dedicated reset input          | Without dedicated reset input       |

## 17. Ordering Information


| Part Number                                                                                                                                                                                                                                                                                  | Package                              |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|
| MB95F394HPMC-G-SNE2<br>MB95F394KPMC-G-SNE2<br>MB95F396HPMC-G-SNE2<br>MB95F396KPMC-G-SNE2<br>MB95F398HPMC-G-SNE2<br>MB95F398KPMC-G-SNE2                                                                                                                                                       | 48-pin plastic LQFP<br>(FPT-48P-M49) |
| MB95F394HPMC1-G-SNE2<br>MB95F394KPMC1-G-SNE2<br>MB95F396HPMC1-G-SNE2<br>MB95F396KPMC1-G-SNE2<br>MB95F398HPMC1-G-SNE2<br>MB95F398KPMC1-G-SNE2                                                                                                                                                 | 52-pin plastic LQFP<br>(FPT-52P-M02) |
| MB95F394HWQN-G-SNE1<br>MB95F394HWQN-G-SNERE1<br>MB95F394KWQN-G-SNE1<br>MB95F394KWQN-G-SNERE1<br>MB95F396HWQN-G-SNE1<br>MB95F396HWQN-G-SNERE1<br>MB95F396KWQN-G-SNE1<br>MB95F396KWQN-G-SNERE1<br>MB95F398HWQN-G-SNE1<br>MB95F398HWQN-G-SNERE1<br>MB95F398KWQN-G-SNE1<br>MB95F398KWQN-G-SNERE1 | 48-pin plastic QFN<br>(LCC-48P-M11)  |


## 18. Package Dimension
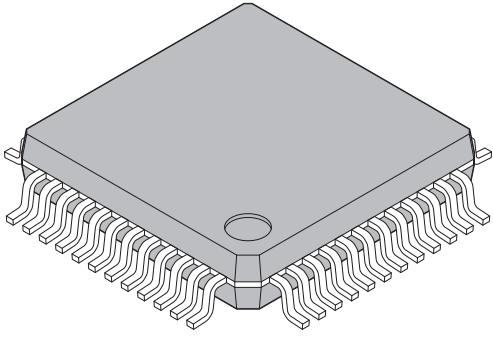
|                                                                                                                                   |                                |                   |
|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------|-------------------|
| <p>48-pin plastic LQFP</p>  <p>(FPT-48P-M49)</p> | Lead pitch                     | 0.50 mm           |
|                                                                                                                                   | Package width × package length | 7.00 mm × 7.00 mm |
|                                                                                                                                   | Lead shape                     | Gullwing          |
|                                                                                                                                   | Lead bend direction            | Normal bend       |
|                                                                                                                                   | Sealing method                 | Plastic mold      |
|                                                                                                                                   | Mounting height                | 1.70 mm MAX       |
|                                                                                                                                   | Weight                         | 0.17 g            |

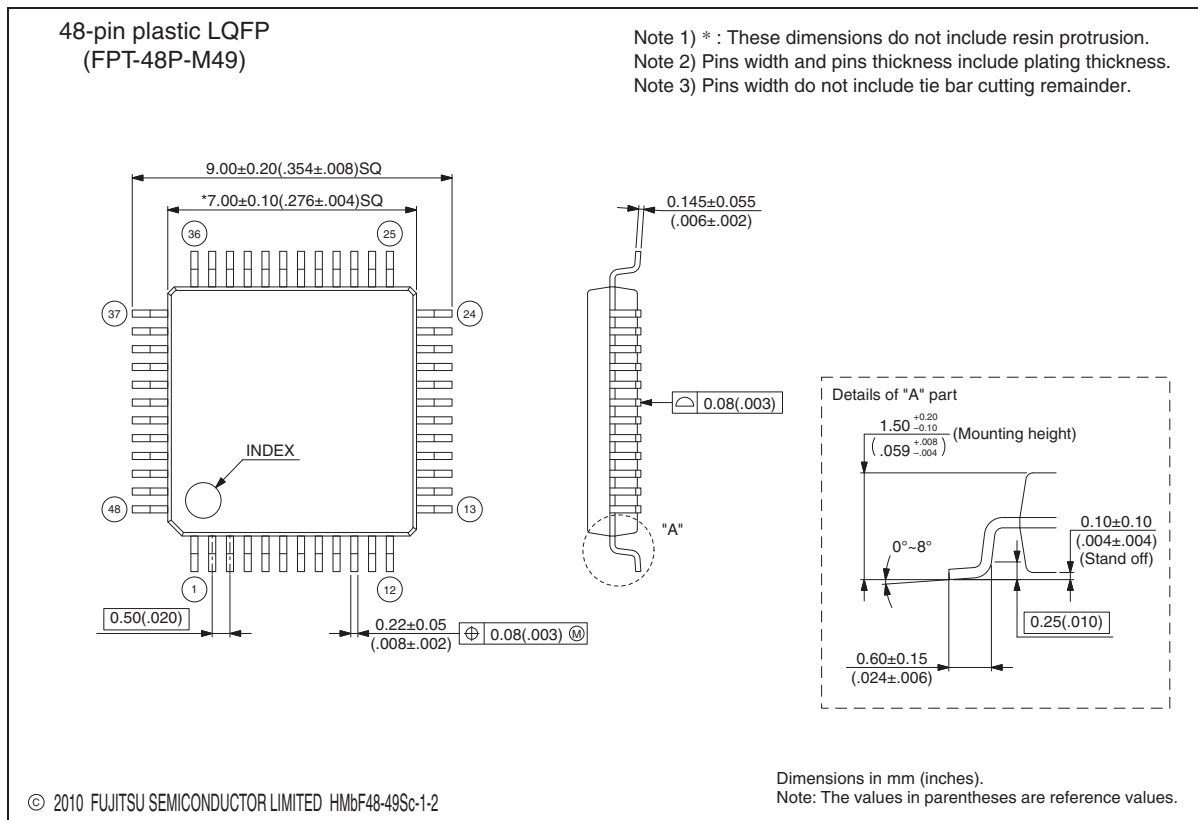


(Continued)

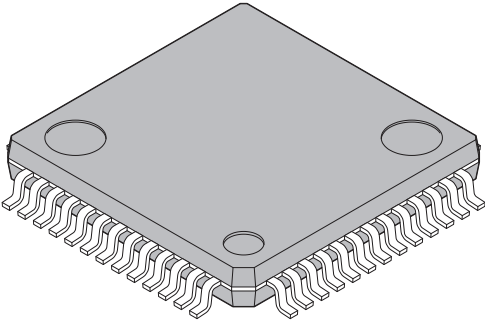
|                                                                                                                                   |                                |                      |
|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------|----------------------|
| <p>52-pin plastic LQFP</p>  <p>(FPT-52P-M02)</p> | Lead pitch                     | 0.65 mm              |
|                                                                                                                                   | Package width × package length | 10.00 × 10.00 mm     |
|                                                                                                                                   | Lead shape                     | Gullwing             |
|                                                                                                                                   | Sealing method                 | Plastic mold         |
|                                                                                                                                   | Mounting height                | 1.70 mm MAX          |
|                                                                                                                                   | Weight                         | 0.32 g               |
|                                                                                                                                   | Code (Reference)               | P-LFQFP52-10×10-0.65 |

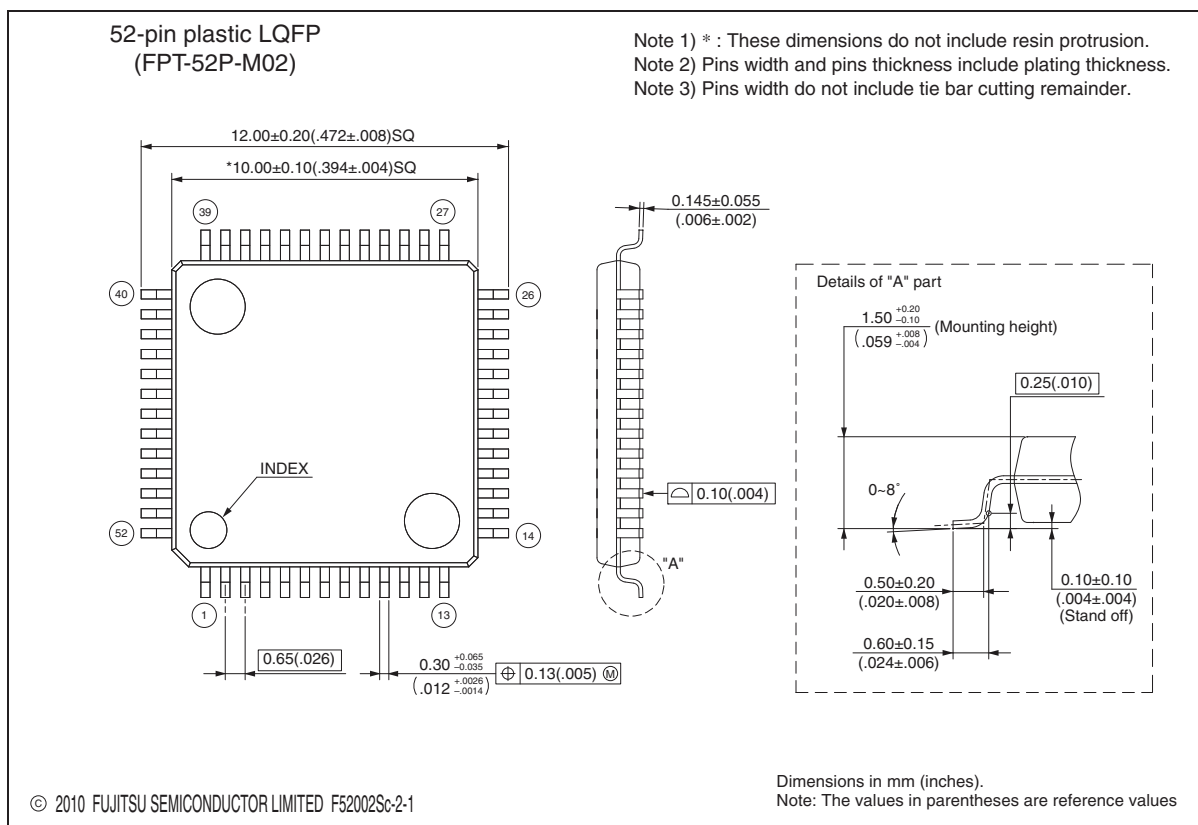

(Continued)

(Continued)
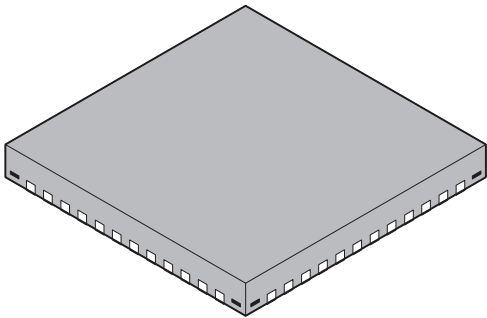
|                                                                                                                                  |                                |                   |
|----------------------------------------------------------------------------------------------------------------------------------|--------------------------------|-------------------|
| <p>48-pin plastic QFN</p>  <p>(LCC-48P-M11)</p> | Lead pitch                     | 0.50 mm           |
|                                                                                                                                  | Package width × package length | 7.00 mm × 7.00 mm |
|                                                                                                                                  | Sealing method                 | Plastic mold      |
|                                                                                                                                  | Mounting height                | 0.80 mm MAX       |
|                                                                                                                                  | Weight                         | 0.12 g            |
|                                                                                                                                  |                                |                   |

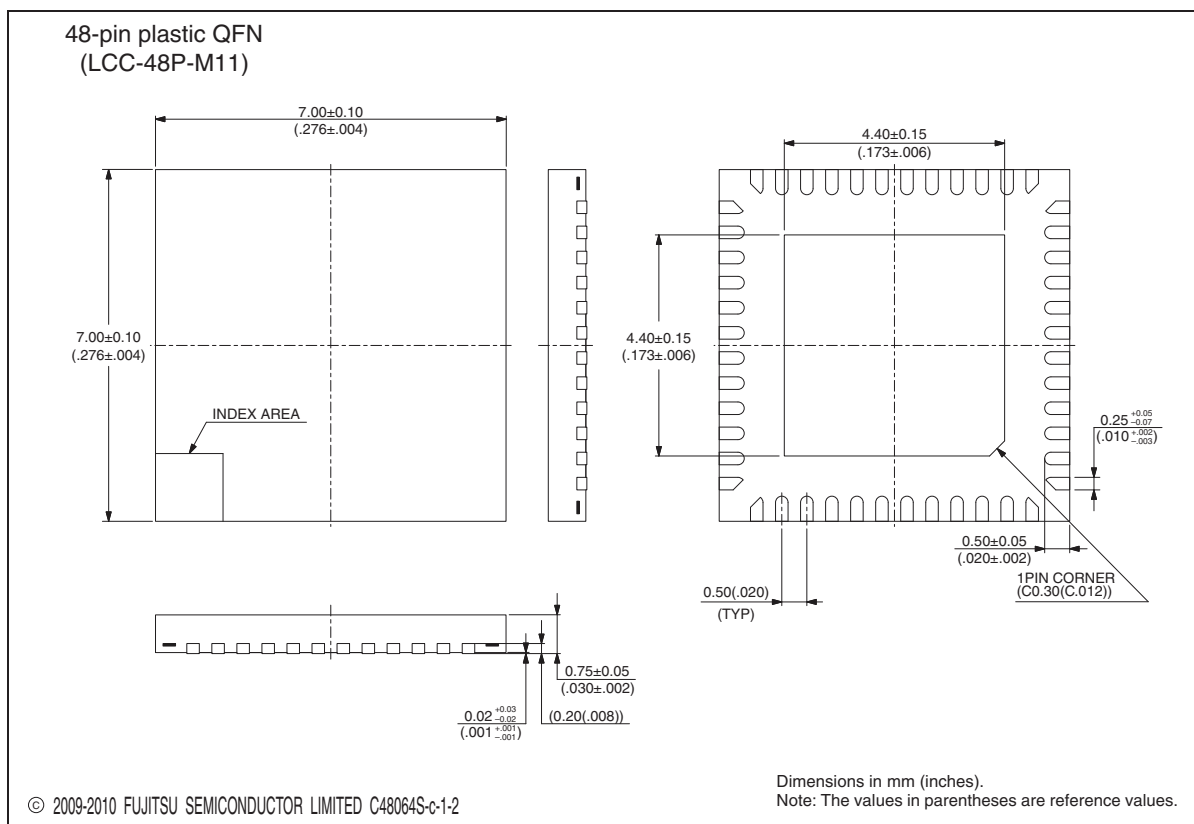

## 19. Major Changes

| Page     | Section                                                          | Details                                                                                                                                                                                                                                  |
|----------|------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1        | Features                                                         | <p>Changed the main CR clock oscillation accuracy.<br/> <math>\pm 2\% \rightarrow \pm 2\%</math> or <math>\pm 2.5\%</math></p> <p>Added a remark about the main CR clock accuracy.</p>                                                   |
| 4        | Product Line-up                                                  | Added FPT-52P-M02.                                                                                                                                                                                                                       |
| 5        | Packages And Corresponding Products                              | Added FPT-52P-M02.                                                                                                                                                                                                                       |
| 6        | Differences Among Products And Notes On Product Selection        | Added a reference for the connection method in “• On-chip debug function”.                                                                                                                                                               |
| 8        | Pin Assignment                                                   | Added the pin assignment diagram of FPT-52P-M02.                                                                                                                                                                                         |
| 10 to 13 | Pin Functions                                                    | Added the pin numbers of FPT-52P-M02.                                                                                                                                                                                                    |
| 34       | Electrical Characteristics<br>AC Characteristics<br>Clock Timing | <p>Changed the values of clock frequency (<math>F_{CRH}</math>).</p> <p>Added conditions related to the LQFP package and the QFN package for the values of clock frequency (<math>F_{CRH}</math>).</p> <p>Added footnotes *2 and *3.</p> |
| 58 to 63 | Sample Characteristics                                           | Added “Sample Characteristics”.                                                                                                                                                                                                          |
| 65       | Ordering Information                                             | Added the part numbers of FPT-52P-M02.                                                                                                                                                                                                   |
| 67       | Package Dimension                                                | Added the package diagram of FPT-52P-M02.                                                                                                                                                                                                |

**NOTE:** Please see “Document History” about later revised information.

## Document History

| Document Title: MB95F394H/F396K/F398H/F394K/F396H/F398K CMOS F2MC-8FX MB95390H Series 8-bit Microcontrollers<br>Document Number: 002-07573 |         |                 |                 |                                                                                                          |
|--------------------------------------------------------------------------------------------------------------------------------------------|---------|-----------------|-----------------|----------------------------------------------------------------------------------------------------------|
| Revision                                                                                                                                   | ECN     | Orig. of Change | Submission Date | Description of Change                                                                                    |
| **                                                                                                                                         | —       | AKIH            | 07/27/2010      | Migrated to Cypress and assigned document number 002-07573.<br>No change to document contents or format. |
| *A                                                                                                                                         | 5185613 | AKIH            | 3/31/2016       | Updated to Cypress template                                                                              |

## Sales, Solutions, and Legal Information

### Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at [Cypress Locations](#).

### Products

|                               |                                                                    |
|-------------------------------|--------------------------------------------------------------------|
| ARM® Cortex® Microcontrollers | <a href="http://cypress.com/arm">cypress.com/arm</a>               |
| Automotive                    | <a href="http://cypress.com/automotive">cypress.com/automotive</a> |
| Clocks & Buffers              | <a href="http://cypress.com/clocks">cypress.com/clocks</a>         |
| Interface                     | <a href="http://cypress.com/interface">cypress.com/interface</a>   |
| Lighting & Power Control      | <a href="http://cypress.com/powerpsoc">cypress.com/powerpsoc</a>   |
| Memory                        | <a href="http://cypress.com/memory">cypress.com/memory</a>         |
| PSoC                          | <a href="http://cypress.com/psoc">cypress.com/psoc</a>             |
| Touch Sensing                 | <a href="http://cypress.com/touch">cypress.com/touch</a>           |
| USB Controllers               | <a href="http://cypress.com/usb">cypress.com/usb</a>               |
| Wireless/RF                   | <a href="http://cypress.com/wireless">cypress.com/wireless</a>     |

### PSoC® Solutions

[cypress.com/psoc](http://cypress.com/psoc)  
PSoC 1 | PSoC 3 | PSoC 4 | PSoC 5LP

### Cypress Developer Community

[Community](#) | [Forums](#) | [Blogs](#) | [Video](#) | [Training](#)

### Technical Support

[cypress.com/support](http://cypress.com/support)

© Cypress Semiconductor Corporation 2010-2016. This document is the property of Cypress Semiconductor Corporation and its subsidiaries, including Spansion LLC ("Cypress"). This document, including any software or firmware included or referenced in this document ("Software"), is owned by Cypress under the intellectual property laws and treaties of the United States and other countries worldwide. Cypress reserves all rights under such laws and treaties and does not, except as specifically stated in this paragraph, grant any license under its patents, copyrights, trademarks, or other intellectual property rights. If the Software is not accompanied by a license agreement and you do not otherwise have a written agreement with Cypress governing the use of the Software, then Cypress hereby grants you under its copyright rights in the Software, a personal, non-exclusive, nontransferable license (without the right to sublicense) (a) for Software provided in source code form, to modify and reproduce the Software solely for use with Cypress hardware products, only internally within your organization, and (b) to distribute the Software in binary code form externally to end users (either directly or indirectly through resellers and distributors), solely for use on Cypress hardware product units. Cypress also grants you a personal, non-exclusive, nontransferable, license (without the right to sublicense) under those claims of Cypress's patents that are infringed by the Software (as provided by Cypress, unmodified) to make, use, distribute, and import the Software solely to the minimum extent that is necessary for you to exercise your rights under the copyright license granted in the previous sentence. Any other use, reproduction, modification, translation, or compilation of the Software is prohibited.

CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS DOCUMENT OR ANY SOFTWARE, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Cypress reserves the right to make changes to this document without further notice. Cypress does not assume any liability arising out of the application or use of any product or circuit described in this document. Any information provided in this document, including any sample design information or programming code, is provided only for reference purposes. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. Cypress products are not designed, intended, or authorized for use as critical components in systems designed or intended for the operation of weapons, weapons systems, nuclear installations, life-support devices or systems, other medical devices or systems (including resuscitation equipment and surgical implants), pollution control or hazardous substances management, or other uses where the failure of the device or system could cause personal injury, death, or property damage ("Unintended Uses"). A critical component is any component of a device or system whose failure to perform can be reasonably expected to cause the failure of the device or system, or to affect its safety or effectiveness. Cypress is not liable, in whole or in part, and Company shall and hereby does release Cypress from any claim, damage, or other liability arising from or related to all Unintended Uses of Cypress products. Company shall indemnify and hold Cypress harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of Cypress products.

Cypress, the Cypress logo, Spansion, the Spansion logo, and combinations thereof, PSoC, CapSense, EZ-USB, F-RAM, and Traveo are trademarks or registered trademarks of Cypress in the United States and other countries. For a more complete list of Cypress trademarks, visit [cypress.com](http://cypress.com). Other names and brands may be claimed as property of their respective owners.