

TRANSFORMERS FOR DIGITAL AUDIO DATA TRANSMISSION

For Use with Cirrus Logic



-  High end digital audio transformer
-  For use in a professional input audio circuit
-  Optional electrostatically shielded version available

Electrical Specifications @ 25°C — Operating Temperature 0°C to 70°C




Part Number		Turns Ratio	Primary Inductance (μH)	L _L (μH) MAX	Isolation (Vrms) MIN
With Shield	Without Shield				
T6074	T6075	1:1 (± 2%)	225	0.7	1500

Note: RoHS-6 compliant parts can be ordered by adding a "NL" suffix to the part number (i.e. T6074 becomes T6074NL).


Mechanical

Schematic

T6074 / T6075

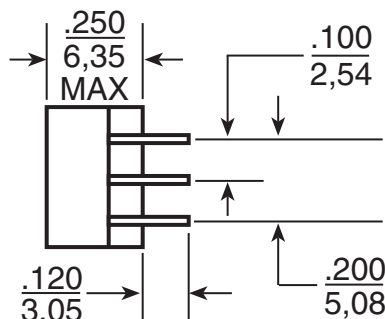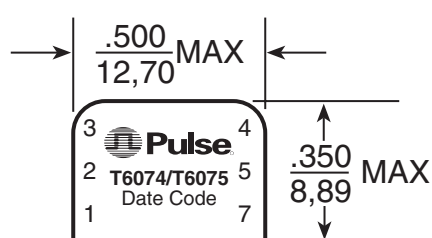

Weight 1.2 grams
Tape & ReelNA
Tube60/tube



Note: For T6074 connection of shield, ground pin 2 or 5, not both pins

Dimensions: $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified, all tolerances are $\pm \frac{.010}{0,25}$

For More Information:

12220 World Trade Drive
San Diego, CA 92128
U.S.A.
www.pulseeng.com
TEL: 858 674 8100
FAX: 858 674 8262

3 Huxley Road
Surrey Research Park
Guildford, Surrey GU2 5RE
United Kingdom
TEL: 44 1483 401700
FAX: 44 1483 401701

Zone Industrielle
F-39270
Orgelet
France
TEL: 33 3 84 35 04 04
FAX: 33 3 84 25 46 41

No. 1
Industrial District
Changan, Dongguan
China
TEL: 86 769 5538070
FAX: 86 769 5538870

Room 1503
XinYin Building
No. 888 YiShan Road
Shanghai 200233
China
TEL: 86 21 54643211/2
FAX: 86 21 54643210

150 Kampong Ampat
#07-01/02
KA Centre
Singapore 368324
TEL: 65 6287 8998
FAX: 65 6280 0080

No. 26
Kao Ching Road
Yang Mei Chen
Taoyuan Hsien
Taiwan, R. O. C.
TEL: 886 3 4641811
FAX: 886 3 4641911

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

© Copyright, 2006. Pulse Engineering, Inc. All rights reserved.

www.pulseeng.com

T688.B (2/06)