


Capacitor, tantalum, 330 uF, 7343, +/-10% Tol, 10V@85C

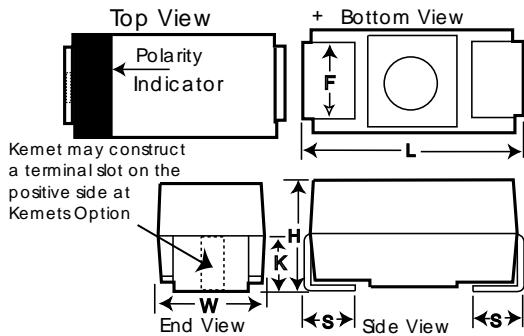

Dimensions (mm)		
Symbol	Dimension	Tolerance
L	7.3	+/-0.3
W	4.3	+/-0.3
H	4.1	+/-0.3
K	1.8	typ
F	2.4	+/-0.1
S	1.3	+/-0.3

Notes:

-In polarity stripe, at KEMET's option, type may be indicated: see catalog for explanation of symbols

-Old part number [Obsolete] was B45197A2337K506

**General Information**

Manufacturer: KEMET

**Electrical Specifications**

Capacitance:	330 uF
Voltage DC @ 85C:	10V
Voltage DC @ 105C:	8.2V
Voltage DC @ 125C:	6.3V
Tolerance:	+/-10%
Application:	General Purpose / Low ESR
Temperature Range:	-55/+125C
Body Type:	Molded Chip
Construction:	Std Chip-MnO2
ESR:	100 mOhm
Footprint:	7343
Termination:	Tin
Leakage Current:	33 uA
Dissipation Factor:	12%
Ripple @ 25C:	1.28 A
Ripple @ 85C:	1.152 A
Ripple @ 125C:	0.512 A

**Packaging Specifications**

Package Kind:	T&R
Package Size:	13in
Package Quantity:	1800

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.



© 2006-2012 IntelliData.net