

## NPCAP™-P XK Series

- Super low ESR, impedance and high heat resistance have been obtained by using conductive polymer as electrolyte.
- Rated voltage range : 2.5 to 16V<sub>dc</sub>, Capacitance range : 100 to 560μF
- Suitable for DC-DC converters, voltage regulators and decoupling applications used to computer motherboards etc.
- Solvent resistant type (see PRECAUTIONS AND GUIDELINES)
- RoHS2 Compliant
- Halogen Free

PXK

↓  
Downsized  
PXE




### SPECIFICATIONS

| Items                                                  | Characteristics                                                                                                                                                                                                  |                                                  |     |     |    |
|--------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|-----|-----|----|
| Category                                               | -55 to +105℃                                                                                                                                                                                                     |                                                  |     |     |    |
| Temperature Range                                      |                                                                                                                                                                                                                  |                                                  |     |     |    |
| Rated Voltage Range                                    | 2.5 to 16V <sub>dc</sub>                                                                                                                                                                                         |                                                  |     |     |    |
| Capacitance Tolerance                                  | ±20% (M) (at 20℃, 120Hz)                                                                                                                                                                                         |                                                  |     |     |    |
| Leakage Current                                        | Shall not exceed values shown in STANDARD RATINGS. (at 20℃ after 2 minutes)                                                                                                                                      |                                                  |     |     |    |
| *Note                                                  |                                                                                                                                                                                                                  |                                                  |     |     |    |
| Dissipation Factor (tan δ )                            | 0.12 max. (at 20℃, 120Hz)                                                                                                                                                                                        |                                                  |     |     |    |
| Low Temperature Characteristics (Max. Impedance Ratio) | Z(-25℃)/Z(+20℃)≤1.15<br>Z(-55℃)/Z(+20℃)≤1.25 (at 100kHz)                                                                                                                                                         |                                                  |     |     |    |
| Endurance                                              | The following specifications shall be satisfied when the capacitors are restored to 20℃ after the rated voltage is applied for 15,000 hours (F46 : 3,000 hours) at 105℃.                                         |                                                  |     |     |    |
|                                                        | Appearance                                                                                                                                                                                                       | No significant damage                            |     |     |    |
|                                                        | Capacitance change                                                                                                                                                                                               | ≤ ±20% of the initial value                      |     |     |    |
|                                                        | D.F. (tan δ )                                                                                                                                                                                                    | ≤150% of the initial specified value             |     |     |    |
|                                                        | ESR                                                                                                                                                                                                              | ≤150% of the initial specified value             |     |     |    |
|                                                        | Leakage current                                                                                                                                                                                                  | ≤The initial specified value                     |     |     |    |
| Bias Humidity                                          | The following specifications shall be satisfied when the capacitors are restored to 20℃ after subjecting them to the DC rated voltage at 60℃, 90 to 95% RH for 1,000 hours (F46 : 500hours).                     |                                                  |     |     |    |
|                                                        | Appearance                                                                                                                                                                                                       | No significant damage                            |     |     |    |
|                                                        | Capacitance change                                                                                                                                                                                               | ≤ ±20% of the initial value                      |     |     |    |
|                                                        | D.F. (tan δ )                                                                                                                                                                                                    | ≤150% of the initial specified value             |     |     |    |
|                                                        | ESR                                                                                                                                                                                                              | ≤150% of the initial specified value             |     |     |    |
|                                                        | Leakage current                                                                                                                                                                                                  | ≤The initial specified value                     |     |     |    |
| Surge Voltage                                          | The capacitors shall be subjected to 1,000 cycles each consisting of charge with the surge voltage specified at 105℃ for 30 seconds through a protective resistor(R=1kΩ) and discharge for 5 minutes 30 seconds. |                                                  |     |     |    |
|                                                        | Rated voltage (V <sub>dc</sub> )                                                                                                                                                                                 | 2.5                                              | 4.0 | 6.3 | 16 |
|                                                        | Surge voltage (V <sub>dc</sub> )                                                                                                                                                                                 | 2.9                                              | 4.6 | 7.2 | 18 |
|                                                        |                                                                                                                                                                                                                  |                                                  |     |     |    |
|                                                        | Appearance                                                                                                                                                                                                       | No significant damage                            |     |     |    |
|                                                        | Capacitance change                                                                                                                                                                                               | ≤ ±20% of the initial value                      |     |     |    |
|                                                        | D.F. (tan δ )                                                                                                                                                                                                    | ≤150% of the initial specified value             |     |     |    |
|                                                        | ESR                                                                                                                                                                                                              | ≤150% of the initial specified value             |     |     |    |
|                                                        | Leakage current                                                                                                                                                                                                  | ≤The initial specified value                     |     |     |    |
| Soldering Heat                                         | The following specifications shall be satisfied when the solder temperature is reduced back to 20℃ to measure dip resistance after soldering has been performed under the recommended soldering conditions.      |                                                  |     |     |    |
|                                                        | Appearance                                                                                                                                                                                                       | No significant damage                            |     |     |    |
|                                                        | Capacitance value                                                                                                                                                                                                | Within the specified tolerance range             |     |     |    |
|                                                        | D.F. (tan δ )                                                                                                                                                                                                    | ≤The initial specified value                     |     |     |    |
|                                                        | ESR                                                                                                                                                                                                              | ≤The initial specified value                     |     |     |    |
|                                                        | Leakage current                                                                                                                                                                                                  | ≤The initial specified value (Voltage treatment) |     |     |    |
|                                                        |                                                                                                                                                                                                                  |                                                  |     |     |    |

\*Note : If any doubt arises, measure the leakage current after following voltage treatment.  
Voltage treatment : DC rated voltage are applied to the capacitors for 120 minutes at 105°C.

### DIMENSIONS [mm]

- Terminal Code : A

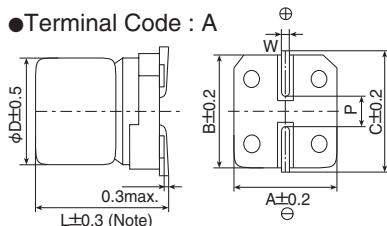

Note : L<sup>+0.1</sup><sub>-0.2</sub> for F46

| Size Code | φD  | L   | A   | B   | C   | W          | P   |
|-----------|-----|-----|-----|-----|-----|------------|-----|
| E61       | 5   | 5.8 | 5.3 | 5.3 | 5.9 | 0.5 to 0.8 | 1.4 |
| F46       | 6.3 | 4.5 | 6.6 | 6.6 | 7.2 | 0.5 to 0.8 | 1.9 |
| F61       | 6.3 | 5.8 | 6.6 | 6.6 | 7.2 | 0.5 to 0.8 | 1.9 |


### MARKING

EX) 2.5V330μF



NPCAP™-PXX Series

◆PART NUMBERING SYSTEM

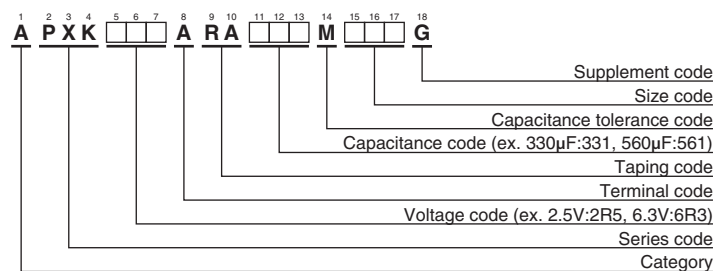

Please refer to "Product code guide (conductive polymer type)"

◆STANDARD RATINGS

| WV<br>(V <sub>dc</sub> ) | Cap<br>(µF) | Size<br>code | Leakage current<br>(µA max./after 2min.) | ESR<br>(mΩ max./20°C, 100k to 300kHz) | Rated ripple current<br>(mA <sub>rms</sub> /105°C, 100kHz) | Part No.           |
|--------------------------|-------------|--------------|------------------------------------------|---------------------------------------|------------------------------------------------------------|--------------------|
| 2.5                      | 220         | F46          | 300                                      | 19                                    | 2,780                                                      | APXK2R5ARA221MF46G |
|                          | 330         | E61          | 412                                      | 16                                    | 3,500                                                      | APXK2R5ARA331ME61G |
|                          | 330         | F46          | 700                                      | 16                                    | 3,500                                                      | APXK2R5ARA331MF46G |
|                          | 560         | F61          | 700                                      | 16                                    | 3,500                                                      | APXK2R5ARA561MF61G |
| 4                        | 180         | F46          | 360                                      | 19                                    | 2,780                                                      | APXK4R0ARA181MF46G |
|                          | 220         | E61          | 440                                      | 17                                    | 3,390                                                      | APXK4R0ARA221ME61G |
|                          | 390         | F61          | 780                                      | 17                                    | 3,390                                                      | APXK4R0ARA391MF61G |
| 6.3                      | 150         | F46          | 472                                      | 19                                    | 2,780                                                      | APXK6R3ARA151MF46G |
|                          | 180         | E61          | 567                                      | 17                                    | 3,390                                                      | APXK6R3ARA181ME61G |
|                          | 220         | F46          | 700                                      | 18                                    | 3,200                                                      | APXK6R3ARA221MF46G |
|                          | 330         | F61          | 1,040                                    | 17                                    | 3,390                                                      | APXK6R3ARA331MF61G |
| 16                       | 100         | F61          | 320                                      | 24                                    | 2,490                                                      | APXK160ARA101MF61G |

◆RATED RIPPLE CURRENT MULTIPLIERS

● Frequency Multipliers

| Frequency (Hz) | 120  | 1k   | 10k  | 50k  | 100k to 500k |
|----------------|------|------|------|------|--------------|
| SMD type       | 0.05 | 0.30 | 0.55 | 0.70 | 1.00         |